


MADE IN
ITALY



GENERAL CATALOGUE 2023

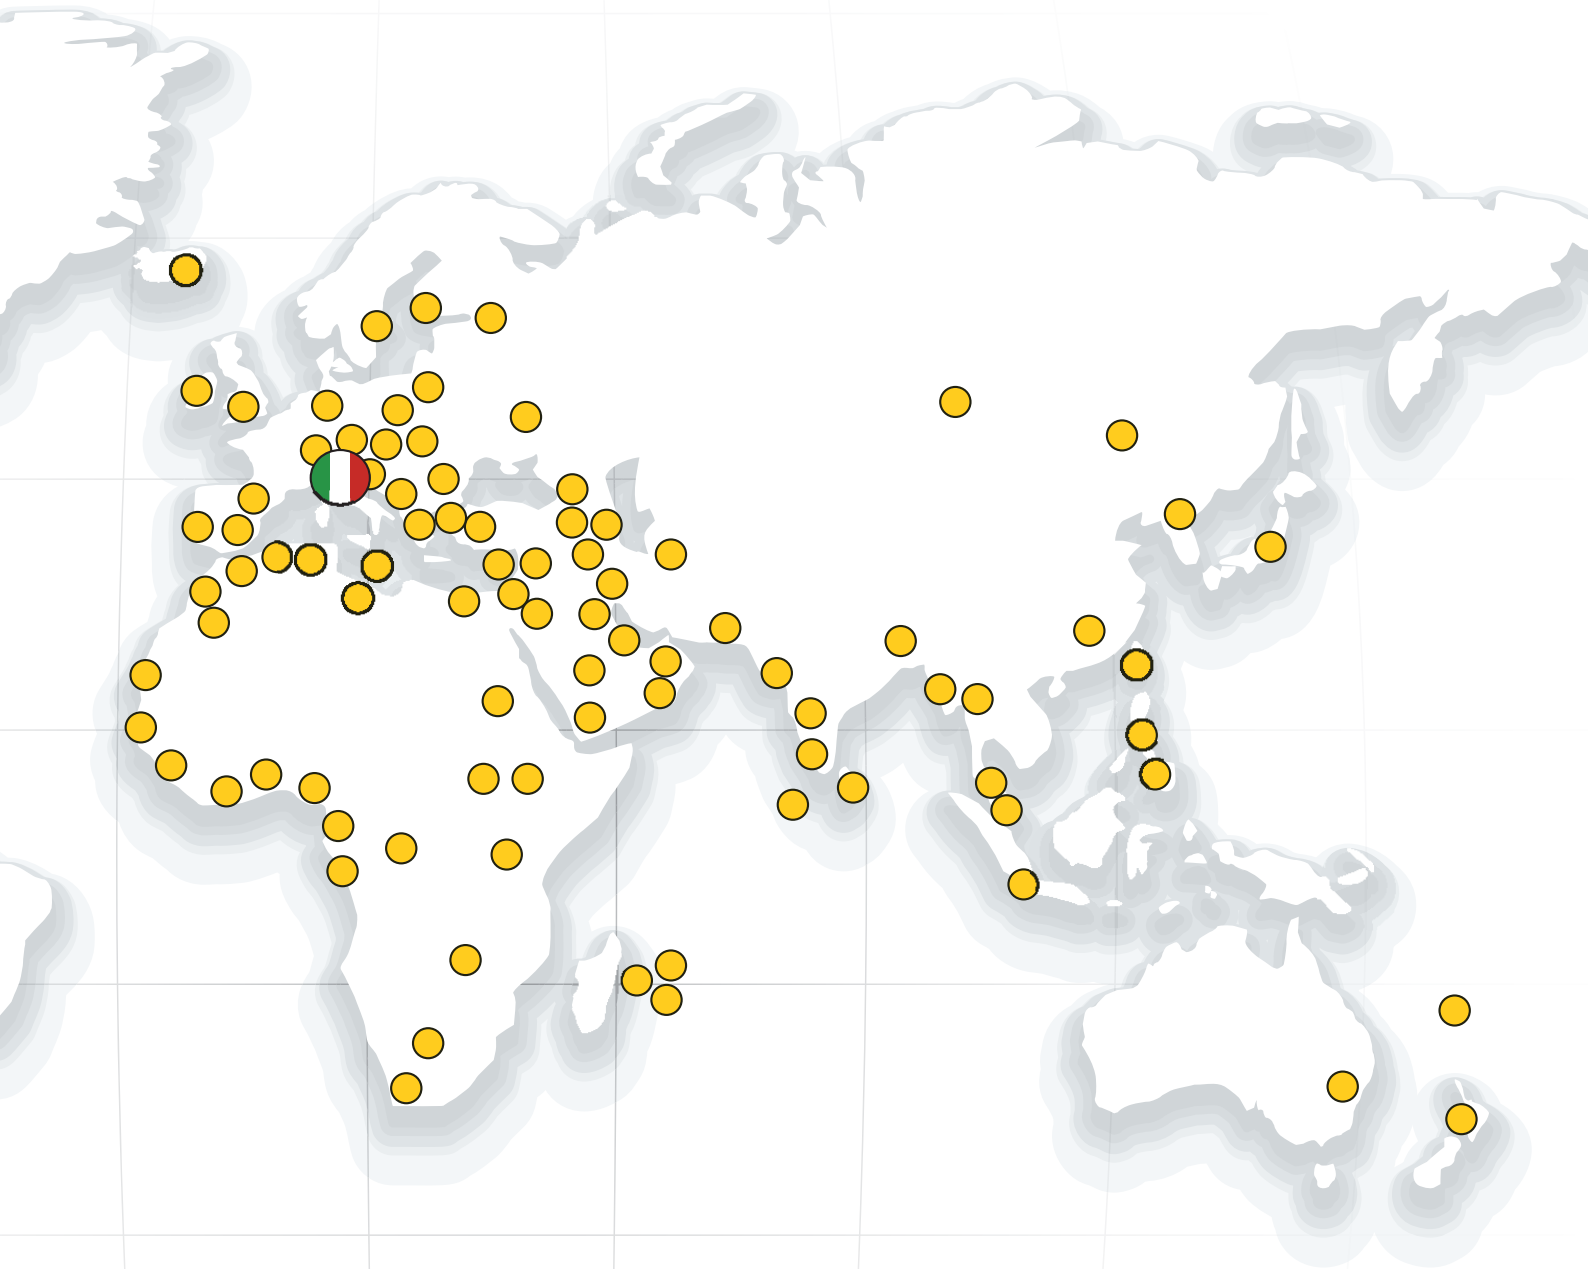

188

DISTRIBUTORS ALL OVER THE WORLD

HOW TO READ THE CATALOGUE





Corporate Management

Geom. Giancarlo Fumagalli
Managing Director

Holder of a diploma by the technical high school for building surveyor, he is the creator of this composite material lighting system.
He speaks Italian and French.

Diplomato alla scuola tecnica per geometri, è ideatore di questo sistema di lampade in materiale composito. Parla italiano e francese.



Dr. Marisa Rabuffetti
Finance Director

Graduate by the Milan University in economic sciences, she is teacher of banking and commercial technique. She speaks Italian, English and French.

Laureata all'università di Milano in scienze economiche, è insegnante alle scuole superiori di tecnica commerciale e bancaria. Parla italiano, inglese e francese.



Dr. Chiara Fumagalli
Commercial Director

Graduate by the Milan University in philosophy, she is holder of a diploma in foreign languages: she can speak and write in Italian, English, German French.

Laureata all'università di Milano in filosofia, è diplomata in lingue straniere: scrive e parla italiano, inglese, tedesco e francese.



Arch. Paolo Fumagalli
Purchasing and Technical Director

Graduate in architecture by the polytechnic University of Milan, he achieved the specialization in lighting technique by the University of Manchester (U. K.). He speaks Italian and English.

Laureato in architettura al Politecnico di Milano, ha conseguito la specializzazione in illuminotecnica all'università di Manchester (U.K.). Parla italiano e inglese.



Dr. Emmanuele Fumagalli
*Assistant General Manager
Human Resources Director*

Graduate by the Milan University in jurisprudence, he achieved the specialization in international law. He speaks Italian and English.

Laureato in Giurisprudenza all'università di Milano con specializzazione in diritto internazionale Parla italiano e inglese.



SOLAR		ROSETTA 34	FIORINA 38	FORTUNATO 38	FELICE 42	SANTINA 46				
	UP&DOWN		MAMETE 52	ABRAM 150 56	ABRAM 190 58	ABRAM 270 58	FRANCY 60	MARTA 90 64	MARTA 160 68	FRANCA 90 72
DOWNLIGHT			TERESA 50 78	TERESA 90 82	TERESA 160 84	TERESA 260 86	LIVIA 60 90	LIVIA 90 92	LIVIA 160 94	LIVIA 180 96
	IN-GROUND		NINA 150 120	NINA 190 122	NINA 270 122	LORENZA 150 124	LORENZA 190 126	LORENZA 270 126	LETI 100 ROUND 128	LETI 100 SQUARE 132
BRICKLIGHT			MINITOMMY 162	MINITOMMY 2L 164	TOMMY 168	TOMMY-2L 170	GIOVA GERMANA 176	GERMANA 180	GIOVA GIUSEPPE 184	GIUSEPPE 188
	FLOODLIGHT		STEVEN 194	ESTER 198	ESTER WALL 200	ELISA 202	ELISA WALL 204	CARLO 206	CARLO WALL 208	CARLO-FS 208
BOLLARD			FRANCY-OP 240	BERTINA 244	BERTA 248	UMBERTA 252	GELMI 258	DANZI 262	STUCCHI 266	CECCHI 270
	BULKHEAD		MARY 288	ANNA 294	SABA 300	RUT 306	SALEM 312	GOLIA 318	CEFA 324	IESSE 330
GARDEN			NOEMI 354	SILOE 370	TOBIA 386	SIMON 404	ELIA 422	PIETRO 434	GLOBE 400 classic 446	GLOBE 500 classic 458
	GARDEN CLASSIC		GIORGIO ROSA 466	VIVI 400 470	ECOVIVI 400 480	BEPPE 400 488	ECOBEPPE 400 496	REMO 400 502	GINO 400 510	VIVI 500 518
URBAN MODERN			CLASSIC POSTS 578	MODERN POSTS 586		SOLAR MODULE 598	E27 HIGH POWER LED 600	E27 LED 604	E27 FILAMENT LED 604	GX53 LED 606
	URBAN CLASSIC									
URBAN MODERN CLASSIC										
	POST									
LAMPS										
	REFERENCES									

COMPANY

COMPANY PROFILE


MADE IN ITALY



since 1973



MADE IN ITALY



2023

Years
of
history



Distributors
all over the world

188

Employees

190

Total Area m²
(open + covered area)

60.000


Covered Area m²

18.000

1973

1984

1999

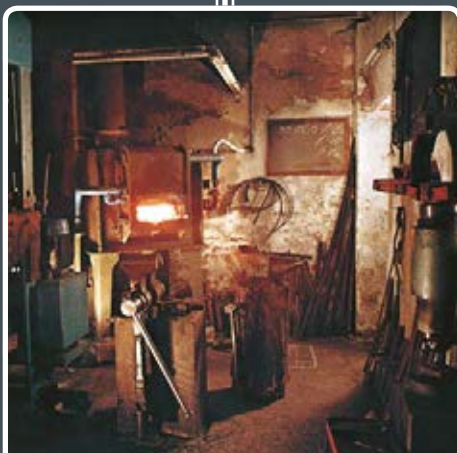

la bottega dei maestri forgiatori



fumagalli
italian lux



Thanks to the enterprise of Mr. Fumagalli Giancarlo, in 1973 an individual company called "La Bottega dei Maestri Forgiatori" was born in Varese (north of Italy) specialising itself in the artistic handwork of wrought iron indoor lightings.

After five years of activity the company started to employ some workers and to open itself to foreign markets, in particular to the Japanese one.

Nasce a Varese, su iniziativa del Sig. Fumagalli una ditta individuale con il nome di "La Bottega dei Maestri Forgiatori", specializzata nella lavorazione artistica del ferro forgiato a mano.

La produzione è costituita da lampade da interno. Dopo cinque anni l'azienda apre verso mercati esteri (in particolare il Giappone), inizia ad assumere i primi dipendenti.

An intuition of Mr. Fumagalli lead the company to an evolution, creating an innovative outdoor lightings production system, consisting of a galvanized steel tube covered by resin material. After some years of experimentation and the setting-up of adequate machineries, the product started to be appreciated all over the world.

Un'intuizione del Sig. Fumagalli porta l'azienda ad un'evoluzione, creando un ingegnoso processo produttivo di lampade da esterno, costituito da un'anima in acciaio galvanizzato rivestito in resina.

Dopo anni di sperimentazioni e la faticosa messa a punto di un'attrezzatura adeguata, il prodotto comincia ad essere distribuito ed apprezzato in tutto il mondo.

Fumagalli family decides to turn the individual company into a limited company, going on with the manufacturing of "composite material" outdoor lighting fixtures.

The articles range increased thanks to the creation of many new models and the production capacity was multiplied by the use of computerized machineries. The recent settlement in the new company seat had definitively made Fumagalli S.r.l. a worldwide leading company in the manufacturing of resin material outdoor lightings.

Subentrando alla ditta individuale, la famiglia Fumagalli decide di costituirsi in società, continuando la fabbricazione di lampade da esterno in materiale composito. Con la creazione di nuovi modelli viene ampliata l'offerta e con attrezzature robotizzate viene moltiplicata la produttività. La sistemazione nella nuova sede rende la società Fumagalli leader mondiale nel suo settore.

2019

2022

2023



INDUSTRY 4.0



FUMAGALLI SRL AT THE TOP OF "ITALY'S EXPORT CHAMPIONS" RANKING



MADE IN ITALY

Fumagalli company earns the title of "Smart factory, Industry 4.0". This title is awarded to factories whose product and production technologies are developed in a complete digital and interconnected environment, granting increased productivity, cost reduction and improved quality control.

L'azienda Fumagalli ottiene il titolo di "Smart factory, Industry 4.0". Questo riconoscimento è assegnato alle fabbriche in cui prodotto e tecnologie produttive vengono sviluppati in un ambiente completamente digitale e interconnesso, che garantisce un'aumentata capacità produttiva, una riduzione dei costi e un migliore controllo della qualità.

Fumagalli Srl ranks seventh in the list of the top 200 Italian companies with the largest export shares. The ranking is the result of an analysis of more than 9.000 companies, with the aim of enhancing the value of Made in Italy. Particularly noteworthy is the fact that Fumagalli Srl is the only lighting manufacturer to appear in the ranking. Fumagalli company's performance earns us the title of "Italy's Export Champions 2022".

L'azienda Fumagalli si è classificata settima nella lista delle prime 200 aziende italiane con le più elevate percentuali di fatturato destinate all'esportazione. La classifica è il risultato di un'analisi effettuata su più di 9.000 aziende con l'intento di intensificare il valore del Made in Italy. Particolarmente degno di nota è il fatto che la ditta Fumagalli è l'unico fabbricante di illuminazione a rientrare nella classifica. L'azienda Fumagalli ha pertanto guadagnato il titolo di "Campione dell'Export 2022".

COMPANY

OVERVIEW

MADE IN ITALY



We are proud to define ourselves as a “pure Italian manufacturer”: all our products are strictly manufactured inside our factory located in Varese (Italy), on a **60.000 sqm area**. This means to keep a full control on the quality and performances of our products.



POLES FACTORY



COMPONENTS STOCK



POLES FACTORY

Siamo orgogliosi di poterci definire come fabbricanti italiani "puri": tutti i nostri prodotti sono rigorosamente fabbricati all'interno dei nostri stabilimenti di Varese (Italia), su un'area di 60.000 m². Questo ci permette di esercitare un pieno controllo sulla qualità e sulle prestazioni dei nostri prodotti.



LUMINARIES FACTORY



OFFICES, ASSEMBLY, DELIVERY



Under construction

NEW WAREHOUSE & FACTORY

COMPANY

OVERVIEW

MADE IN ITALY



Member of
CONFEDERATION OF
ITALIAN INDUSTRY



ISO 9001:2015



ISO 9001:2015



SCESm 001



INDUSTRY 4.0



A DIGITAL ENTERPRISE

In our company, product and production technologies are developed in a complete digital environment, to get an advanced manufacturing process fully automated and interconnected.

UN'AZIENDA DIGITALE

Nella nostra azienda prodotto e tecnologie produttive vengono sviluppati in un ambiente completamente digitale, per ottenere un avanzato processo di fabbricazione interamente automatizzato ed interconnesso.



INCREASED
PRODUCTIVITY

COST
REDUCTION

IMPROVED QUALITY
CONTROL

REAL TIME DATA EXCHANGE



MONITORING ON-LINE



MACHINERIES AND DEVICES INTERCONNECTION




PURE ITALIAN MANUFACTURER

Inside the following different departments of our company we can manage the whole product development process from the initial design to the fully-finished product.

PURI FABBRICANTI ITALIANI

All'interno dei seguenti dipartimenti della nostra azienda possiamo gestire l'intero processo di sviluppo del prodotto, dall'idea iniziale al prodotto realizzato.

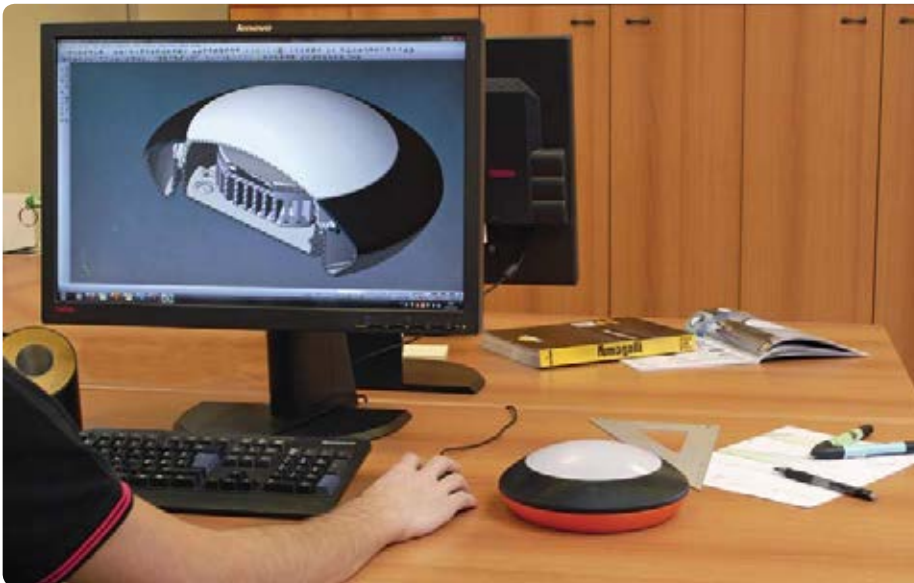

R&D DEPARTMENT 3D PROTOTYPING

Product planning and design through the most advanced 3D modelling software, CAD systems and modern multimedia. Product engineering and prototypes creation with the most advanced 3D printers.

RICERCA E SVILUPPO PROTOTIPAZIONE 3D

Progettazione e disegno del prodotto attraverso i software più avanzati di modellazione 3D, di sistemi CAD e di multimedia moderni. Ingegnerizzazione del prodotto e creazione di prototipi con le più avanzate stampanti 3D.



TECHNICAL DESIGN DEPARTMENT

Mould design and engineering, toolpath programming through the most advanced 3D software directly connected to the CNC workstations.

SEZIONE PROGETTAZIONE STAMPI

Progettazione e ingegnerizzazione degli stampi, studio dei percorsi utensile, attraverso i più avanzati software 3D direttamente collegati alle postazioni di lavoro CNC.



MOULD CONSTRUCTION DEPARTMENT

New hi-tech work stations, working only for the construction of our moulds, enable us to update constantly our collection with new products manufactured in accordance with the most advanced lighting solutions.

REPARTO COSTRUZIONE STAMPI

Nuovi centri di lavoro dedicati esclusivamente alla costruzione dei nostri stampi, ci permettono di aggiornare costantemente la nostra collezione con numerosi prodotti nuovi, fabbricati secondo le più moderne tecnologie e in accordo con le più recenti soluzioni illuminotecniche.







An internal mould construction division means full control on the quality of our product in all its details and a continuous and regular maintenance of the many existing moulds.

Una divisione interna per la costruzione degli stampi significa totale controllo sulla qualità del prodotto nei suoi minimi dettagli e possibilità di effettuare una regolare e costante manutenzione sui numerosi stampi esistenti.





WIRE ELECTRICAL DISCHARGE MACHINE



CNC SURFACE GRINDER





INDUSTRIAL PRODUCTION PROCESS IN DIFFERENT PHASES

A successful synergy between the decades-long experience of a qualified staff and the use of modern automatic machineries with the most updated technologies.

PROCESSO DI PRODUZIONE INDUSTRIALE IN DIVERSE FASI

Un'efficace sinergia tra la decennale esperienza di personale qualificato e l'utilizzo di macchinari automatici dotati delle più moderne tecnologie.



PLASMA CUTTING MACHINE



BLACK STEEL WELDING



RESIN DRYERS AND DEHUMIDIFIERS



WAREHOUSE

Fumagalli stock of raw materials, components and semi-finished products is maintained at the best levels to ensure prompt delivery of standard products and fast preparation of special or large quantity orders.

MAGAZZINO

Lo stock Fumagalli di materie prime, componenti e semi-lavorati viene mantenuto a livelli ottimali per assicurare pronte consegne dei prodotti standard ed una veloce esecuzione di richieste speciali o per grandi quantità.



RESIN RAW MATERIAL STOCK



RESIN RAW MATERIAL STOCK

COMPONENTS STOCK



READY POLES STOCK

Stock for projects poles to ensure quick deliveries

3200 poles 2,5mt, 3mt, 4mt, 5mt high- Colours: Classic poles in black. Modern poles in grey.



ASSEMBLY AND ELECTRIFICATION DEPARTMENT

The assembly, electrification and packing department allows us to ship the products ready for installation to meet customer's needs.

REPARTO DI ASSEMBLAGGIO ED ELETRIFICAZIONE

Il reparto di assemblaggio, elettrificazione ed imballaggio ci consente di spedire i nostri prodotti già pronti per l'installazione e personalizzati secondo le necessità del cliente.





BOX STOCK



PACKING



GOODS READY FOR SHIPMENT



2022

New headquarter, showroom and logistic centre. Covered surface area: 4.000 sqm.
Operative from December 2022.

*Nuovo centro logistico e amministrativo con nuova esposizione. Superficie coperta: 4.000 m².
Operativo da dicembre 2022.*



2023

New factory and new warehouse now under construction. Covered surface area: 7.400 sqm. Completion of construction site: December 2023.

Nuova fabbrica e nuovo magazzino attualmente in costruzione. Superficie coperta: 7.400 m². Completamento del cantiere: dicembre 2023.



Fumagalli created and developed a unique post technology, registered as FUMATECH. Fumatech technology grants to our lamps the same strength features of a metal post, combined with all the advantages in terms of rust and corrosion resistance that only a resin material can offer.

L'azienda Fumagalli ha creato e sviluppato un'esclusiva tecnologia per la fabbricazione dei pali, registrata come FUMATECH. La tecnologia FUMATECH assicura alle nostre lampade le medesime caratteristiche di solidità di un palo in metallo, con tutti i vantaggi in termini di resistenza alla ruggine e alla corrosione che solo la resina può offrire.



METAL POST COVERED BY RESIN

50 YEARS
EXPERIENCE

- ✓ Protected against corrosion.
Inattaccabile dalla corrosione.
- ✓ Not-fading colours (UV-rays stabilized).
Colori inalterati nel tempo (stabilizzati ai raggi UV).
- ✓ Double insulated.
Doppio isolamento.
- ✓ Rigid and shockproof.
Rigido e resistente agli urti.
- ✓ Fireproof.
Ignifugo.
- ✓ Light and easy to transport.
Leggero e facile da trasportare.
- ✓ Manufactured according to European Community's standards.
Fabbricato secondo le norme della Comunità Europea.
- ✓ High quality resin polymer sourced in Europe.
Resina polimerica di alta qualità fabbricata in Europa.



1 INNER METAL POLE STRUCTURE

Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

2 OUTER RESIN COVER

Outer coating of a single piece without joints made of shockproof resin material:

- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire

3 EXPANSE

High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.



MADE IN ITALY



ANTI CORROSION

Thanks to the outer resin material, Fumagalli lamps are protected against rust and corrosion, even if subjected to saline or polluted environments.
Grazie alla resina esterna le lampade Fumagalli sono protette da ruggine e corrosione, anche se esposte ad ambienti salini o inquinati.



NO MAINTENANCE

The colour of the outer resin coating is molded in the paste of material to grant the maximum durability over the time. No re-painting will ever be necessary.
Il colore della resina esterna è nella pasta stessa del materiale, per garantire la massima durata nel tempo. Non sarà più necessaria alcuna riverniciatura.



UV-RAYS STABILIZED

Fumagalli products are made of UV stabilized materials to avoid color fading of the outer surface under the sun. Ideal in hot and cold climate.
I prodotti Fumagalli sono realizzati con materiali stabilizzati agli UV per evitare che il colore della superficie esterna sbiadisca con il sole.



SAFE



CLASS II

The outer resin coating of Fumagalli products isolates the lamp from electrical discharges (double insulation Class II).

Il rivestimento esterno dei prodotti Fumagalli rende la lampada isolata dalle scariche elettriche (doppio isolamento Classe II).



UNAFFECTED BY CHEMICAL FERTILIZERS

Fumagalli lamps are not affected by chemical fertilizer or pollutants.

Le lampade Fumagalli non sono soggette a deterioramento dovuto a fertilizzanti chimici od agenti inquinanti.





In order to assure the reliability of its manufacturing and marketing process, the company Fumagalli Srl has implemented and maintains a management system, which meets the requirements of the standard ISO 9001:2015, as certified by The International Certification Network IQNET, which is the largest provider of management system certification in the world, and by the Swiss Association for Quality and Management Systems SQS.

Per garantire l'affidabilità del proprio processo produttivo e commerciale, la ditta Fumagalli Srl possiede e mantiene un sistema di gestione aziendale che soddisfa i requisiti della norma ISO 9001:2015, come certificato sia dall'International Certification Network IQNET, che è il più grande organismo al mondo preposto a certificare sistemi di gestione per la qualità, sia dall'Associazione Svizzera per Sistemi di Qualità e di Management SQS.



Fumagalli products obtained also the C-UL-US certification Mark, as they meet the United States National Standard for Luminaires UL1598 and the Canadian National Standard for Luminaires CSA C22.2 No. 250.0.

Fumagalli company is officially registered as a UL classified manufacturer and, upon request, a copy of the UL Certificate of Compliance can be provided to Fumagalli customers, together with the report about the following tests conducted on Fumagalli products: Grounding Continuity Test, Normal Temperature Test, Dielectric Voltage-Withstand Test, Rain Test, Sprinkler Test.

I prodotti Fumagalli hanno ottenuto in via definitiva anche la certificazione C-UL-US, essendo conformi agli standard statunitensi UL1598 per apparecchi illuminanti e agli standard canadesi CSA C22.2 No. 250.0.

La ditta Fumagalli è stata ufficialmente registrata all'interno dell'albo dei fabbricanti certificati UL e, su richiesta, una copia del certificato di conformità UL può essere fornito a tutti i clienti Fumagalli, insieme con i report dei seguenti test condotti sui prodotti Fumagalli: Grounding Continuity Test, Normal Temperature Test, Dielectric Voltage-Withstand Test, Rain Test, Sprinkler Test.





All Fumagalli products are manufactured according to the most updated international standards and regulation and are CE marked in order to ensure to our worldwide customers the highest levels of quality in the full respect of environment and person.

Tutti i prodotti Fumagalli sono fabbricati secondo le più aggiornate norme e standard internazionali e sono marcati CE, in modo da assicurare ai nostri clienti in tutto il mondo i più alti livelli di qualità nel pieno rispetto dell'ambiente e delle persone.



To allow a direct market access of our products in more than 50 countries all over the world, most of Fumagalli products have been tested and certified by third party accredited laboratories within the **IECEE CB scheme** – the most internationally recognized system for Conformity and Certification of Electrotechnical Equipment and Components.

*Per permettere ai nostri apparecchi di avere un accesso diretto in più di 50 paesi in tutto il mondo, una larga parte dei prodotti Fumagalli è stata anche testata e certificata da laboratori terzi accreditati secondo le direttive **IECEE CB** – il sistema di conformità e certificazione più riconosciuto a livello internazionale relativamente ai prodotti e componenti elettrotecnici.*

IECEE Member Countries at present:

- | | | | |
|--|----------------|--|----------------------|
| | Argentina | | Malaysia |
| | Australia | | Mexico |
| | Austria | | Netherlands |
| | Bahrain | | New Zealand |
| | Belarus | | Nigeria |
| | Belgium | | Norway |
| | Brazil | | Pakistan |
| | Bulgaria | | Poland |
| | Canada | | Portugal |
| | China | | Russian Federation |
| | Colombia | | Saudi Arabia |
| | Croatia | | Serbia, Rep.Of |
| | Czech Republic | | Singapore |
| | Denmark | | Slovakia |
| | Finland | | Slovenia |
| | France | | South Africa |
| | Germany | | Spain |
| | Greece | | Sweden |
| | Hungary | | Switzerland |
| | India | | Thailand |
| | Indonesia | | Turkey |
| | Ireland | | Ukraine |
| | Israel | | United Arab Emirates |
| | Italy | | United Kingdom |
| | Japan | | USA |
| | Kenya | | Vietnam |
| | Korea, Rep.Of | | |



Available CB certificates and CB test reports can be provided to Fumagalli customers upon request.



With the aim of offering to our customers very reliable and safe LED solutions with certified quality and certified performances, all Fumagalli LED lamps (GX53, GU10, G9, E27, R7s) obtained the prestigious TÜV SÜD German certification mark, as they comply with the international standards EN 60968:2015, EN 62031:2008, IEC/TR 62778:2014, IEC 62560:2012/A1:2015, EN 62493:2015. **TÜV Certificate of Compliance** includes also the following test reports:

*Al fine di offrire ai nostri clienti soluzioni a Led affidabili e sicure con qualità e prestazioni certificate, tutte le lampadine a LED Fumagalli (GX53, GU10, G9, E27, R7s) hanno ottenuto la prestigiosa certificazione TÜV SÜD, poichè sono conformi ai seguenti standard internazionali: EN 60968:2015, EN 62031:2008, IEC/TR 62778:2014, IEC 62560:2012/A1:2015, EN 62493:2015. Il **Certificato di Conformità TÜV** include anche i seguenti test report:*

EMC TESTED

EMC Certificate: Fumagalli lamps meet the Electromagnetic Compatibility Directive 2014/30/EU and its amendments.
Certificato EMC: le lampadine Fumagalli sono conformi alla Direttiva di Compatibilità Elettromagnetica 2014/30/EU.

LVD TESTED

LVD Certificate: Fumagalli lamps fulfil the Low Voltage Directive 2014/35/EU, therefore are CE marked and comply with safety requirements like protection against electrical shock, moisture and heat resistance, resistance to flame and ignition.
Certificato LVD: le lampadine Fumagalli rispettano la Direttiva Bassa Tensione 2014/35/EU 2015/1428, sono perciò marchiate CE e conformi a requisiti di sicurezza quali protezione contro scosse elettriche, resistenza al calore e all'umidità, resistenza alla fiamma e alle accensioni.

NEW ERP

New ERP Attestation of conformity: Fumagalli lamps fulfil the NEW European Ecodesign Directive EU 2019/2020, which sets stricter energy efficiency requirements, new verification tolerances and other factors such as bulb lifetime and warm-up time.
Nuova attestazione di conformità ERP: Le lampadine Fumagalli sono conformi alla NUOVA Direttiva Europea Ecodesign EU 2019/2020, che stabilisce requisiti di efficienza energetica più severi, nuove verifiche sulle tolleranze e altri fattori come la durata di vita della lampadina e il suo tempo di accensione.

CB

IECEE CB Certificate: Fumagalli lamps meet the International System for Conformity and Certification of Electrotechnical Equipment allowing direct market access in more than 50 countries all over the world.
Certificato IECEE CB: le lampadine Fumagalli sono conformi al Sistema Internazionale di Conformità e Certificazione dei prodotti e componenti elettrotecnici, che ne garantisce un accesso diretto ai mercati di oltre 50 paesi in tutto il mondo.

RoHS REACH COMPLIANT

RoHS REACH compliant: Fumagalli lamps fulfil the RoHS (Restriction of Hazardous Substances) directive 2011/65/EU and its amendments and the REACH regulation (EC) No. 1907/2006, regarding the concentration of Very High Concern Substances (SVHC).
RoHS and REACH test report: le lampadine Fumagalli sono conformi alla direttiva RoHS 2011/65/EU e ai suoi emendamenti (restrizioni sull'uso di sostanze pericolose) e al regolamento REACH (EC) No. 1907/2006 sulla concentrazione di sostanze ad alto rischio.







A specialized team of lighting professionals is permanently at our customers' disposal to provide a qualified product technical support, to supply lighting diagrams and to give advice about the optimal article selection and light sources distribution, according the customer's needs.

In addition, our technical division can provide at any time the following information and services to our worldwide customers:

- **photometric data** for all Fumagalli diffusers with different wattages: they are available on request in eulumdat, iesna 86/91/95, cibse\1, Itli
- **calculation of the average horizontal luminance** and of the isolux curves at a given high level
- **wind load calculations**

From Fumagalli web site www.fumagalli.it it's possible to download the technical specification and the photometric data in .eulumdat or .ies format of all Fumagalli luminaries.

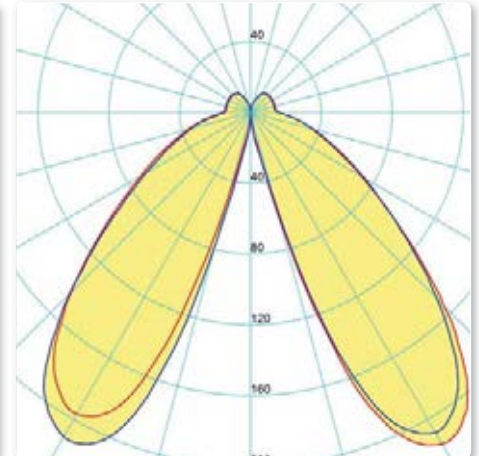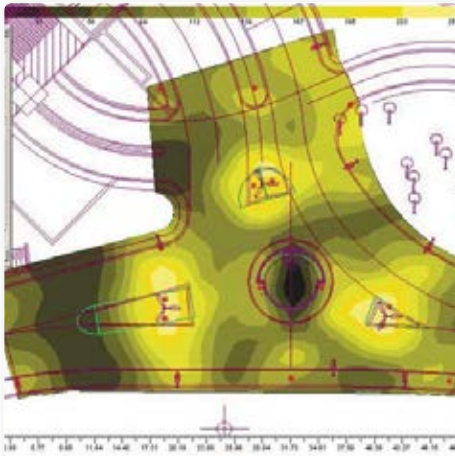

Un team dedicato di professionisti della luce è permanentemente a disposizione dei nostri clienti per fornire un qualificato supporto tecnico relativo al prodotto, per elaborare studi fotometrici e per fornire consigli sulle soluzioni ottimali relative alla selezione degli articoli e alla distribuzione delle sorgenti luminose in una data area.

In aggiunta, il nostro dipartimento tecnico può fornire in ogni momento ai nostri clienti in tutto il mondo le seguenti informazioni e servizi:

- **dati fotometrici** di tutti i diffusori Fumagalli con diversi wattaggi: questi sono disponibili su richiesta nei formati eulumdat, iesna 86/91/95, cibse\1, Itli
- **calcolo dell'illuminamento medio orizzontale** e delle curve isolux ad una data altezza
- **calcoli relativi alla resistenza al vento**

È possibile scaricare dal sito Fumagalli www.fumagalli.it le schede tecniche e le fotometrie di tutti i diffusori Fumagalli in formato .eulumdat o .ies.


REFERENCES	LAMPS	POST	URBAN MODERN	URBAN CLASSIC	GARDEN	BULKHEAD	BOLLARD	FLOODLIGHT	BRICKLIGHT	IN-GROUND	DOWNLIGHT	UP&DOWN	SOLAR	COMPANY
------------	-------	------	-----------------	------------------	--------	----------	---------	------------	------------	-----------	-----------	---------	-------	---------



SOLAR

ROSETTA

CLASSIC SOLAR LED



SOLAR lantern in classic style with motion sensor and replaceable battery. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top and wall installation. Provided with TÜV-CB certified, Kelvin settable LED solar module, adjustable in three different working mode. Automatic ON/OFF. Insulation class III, protection rating IP55.

Lanterna SOLARE in stile classico, con sensore di movimento e batteria sostituibile. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo o a parete. Fornita completa di modulo solare a LED, certificata TÜV-CB con Kelvin impostabile e con tre diverse modalità di utilizzo selezionabili. Classe di isolamento III, grado di protezione IP55.



R22.151.S1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

AUTO ON-OFF WIRELESS INSTALLATION PIR SENSOR 120° Smt.

CE CB IECEE CB SCHEME INSULATION CLASS III RESIDENTIAL RECYCLABLE ANTI-SHOCK UV-TREATED WALL POST





ROSETTA- COMPONENTS



LED SOLAR MODULE with motion sensor, photovoltaic panel and replaceable battery. Adjustable in 3 different working mode and 3 Kelvin temperature.

MODULO SOLARE A LED provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. 3 diverse modalità di utilizzo e 3 temperature di luce selezionabili.

Lantern **ROOF**, made of shockproof resin material, provided with silicone rubber gasket to ensure a proper protection against external agent.

TETTO realizzato in resina in resina antiurto, provvisto di guarnizione in gomma siliconica per garantire un'adeguata protezione contro gli agenti esterni.

DIFFUSER with frosted finishing, one piece only, made of UV stabilized polymethylmethacrylate (PMMA).

DIFFUSORE satinato, in un unico pezzo, fabbricato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



Dimensions and weight

Height: 240 mm
Width: 240 mm
Depth: 210 mm
Weight: 2,15 Kg

Moulded colours:

Black

Diffuser:

Frosted

SOLAR MODULE



POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
5V/2W	max 280 lm	6500 K	.S1K
		4000 K	
		2700 K	

SOLAR MODULE



Technical details on page 596.

3 WORKING MODE

WORKING MODE	SUMMER MODE	WINTER MODE	SENSOR MODE	STANDBY MODE
	AUTONOMY 25h (at fully charged battery)	AUTONOMY 46h (at fully charged battery)	423 SENSOR DETECTIONS (at fully charged battery)	NO WORKING TO PRESERVE THE BATTERY
CHARGING TIME 6h at 60.000 Lux (full sunny day)				

CCT SETTABLE



Press the switch to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.

REPLACEABLE BATTERY



- LiFePO4 IFR 26650 3,3Ah-3,2V
- No risk of explosion
- Working temperature -10° to +60°C
- Longer Lifetime



MOTION SENSOR

- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

CCT SETTABLE LED



- 3000K/4000K/6500K
- CRI >80
- SDCM <6





SOLAR PANEL

- 5V/2W
- Monocrystalline PET type
- Antishock material

ROSETTA

CLASSIC SOLAR LED





BISSO/ROSETTA
R22.131.S1K

Pcs 12
Kg 24,14
mc 0,216

ROSETTA
R22.000.S1K

Pcs 1
Kg 1,3
mc 0,018

MINILOT/ROSETTA
R22.111.S1K

Pcs 12
Kg 23,49
mc 0,216

MIZAR/ROSETTA
R22.151.S1K

Pcs 1
Kg 3,2
mc 0,070


IAFET/ROSETTA
R22.162.S1K

Pcs 1
Kg 4,8
mc 0,070

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

FIORINA - FORTUNATO

MODERN SOLAR LED



SOLAR lamp with motion sensor and **replaceable battery**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Post or wall version available. Provided with TÜV-CB certified, **Kelvin settable LED solar module**, adjustable in **three different working mode**. Insulation class III, protection rating IP55.

*Lampada **SOLARE**, con sensore di movimento e **batteria sostituibile**. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione a palo o a muro. Fornita completo di **modulo solare a LED** certificato TÜV-CB con **Kelvin impostabile** e con **tre diverse modalità di utilizzo** selezionabili. Classe di isolamento III, grado di protezione IP55.*



FI1.542.S1 K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

AUTO ON-OFF WIRELESS INSTALLATION PIR SENSOR

CE CB IECEE CB SCHEME INSULATION CLASS III RESIDENTIAL

RECYCLABLE ANTI-SHOCK UV-TREATED WALL POST SPIKE





FIORINA / FORTUNATO - COMPONENTS

IP55



FIORINA



DUAL USE



FORTUNATO

LED SOLAR MODULE with motion sensor, photovoltaic panel and replaceable battery. Adjustable in 3 different working mode and 3 Kelvin temperature.

MODULO SOLARE A LED provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. 3 diverse modalità di utilizzo e 3 temperature di luce selezionabili.

POLE in one piece only complete with spike. Made in shockproof resin material, UV rays stabilized, rust and corrosion free. Dual use: you can fix the spike outside the pole for in-ground installation, or inside the pole for surface installation with screws.

PALO in un unico pezzo completo di picchetto. Fabbricato in resina antiurto stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Duplice utilizzo: il picchetto può essere montato all'esterno del palo per installazione diretta nel terreno o al suo interno per installazione al suolo mediante tasselli di fissaggio.

WALL BRACKET suitable to host the solar module. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

BRACCIO A MURO atto ad accogliere il modulo solare, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

FIORINA



Dimensions and weight

Diameter: Ø160 mm
Height: 560mm
Weight: 1,3 Kg

FORTUNATO



Dimensions and weight

Width: 160 mm
Depth: 180 mm
Height: 40mm
Weight: 0,76 Kg

Moulded colours:


Black White Grey

SOLAR MODULE



POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
5V/2W	max 280 lm	6500 K	.S1K
		4000 K	
		2700 K	

SOLAR MODULE



Technical details on page 596.

3 WORKING MODE

	SUMMER MODE	WINTER MODE	SENSOR MODE	
<p>AUTONOMY 25h (at fully charged battery)</p>	<p>AUTONOMY 46h (at fully charged battery)</p>	<p>423 SENSOR DETECTIONS (at fully charged battery)</p>	<p>NO WORKING TO PRESERVE THE BATTERY</p>	
<p>CHARGING TIME 6h at 60.000 Lux (full sunny day)</p>				

REPLACEABLE BATTERY



- LiFePO4 IFR 26650 3,3Ah-3,2V
- No risk of explosion
- Working temperature -10° to +60°C
- Longer Lifetime



MOTION SENSOR

- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

CCT SETTABLE LED




- 3000K/4000K/6500K
- CRI >80
- SDCM <6



SOLAR PANEL

- 5V/2W
- Monocrystalline PET type
- Antishock material

CCT SETTABLE


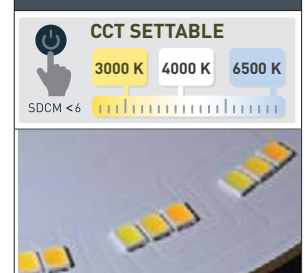


Press the switch to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.

FIORINA - FORTUNATO


MODERN SOLAR LED



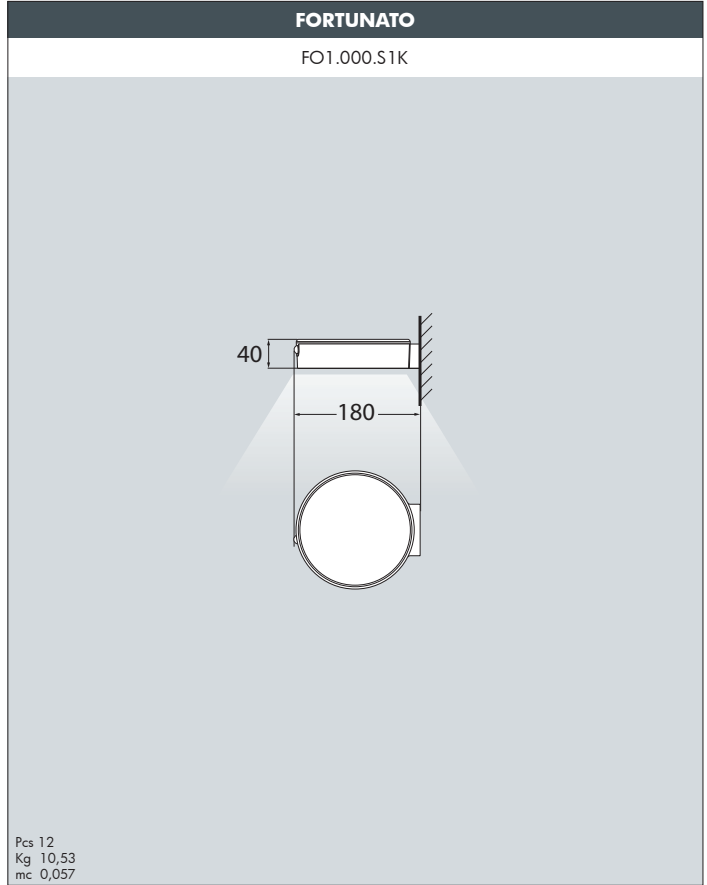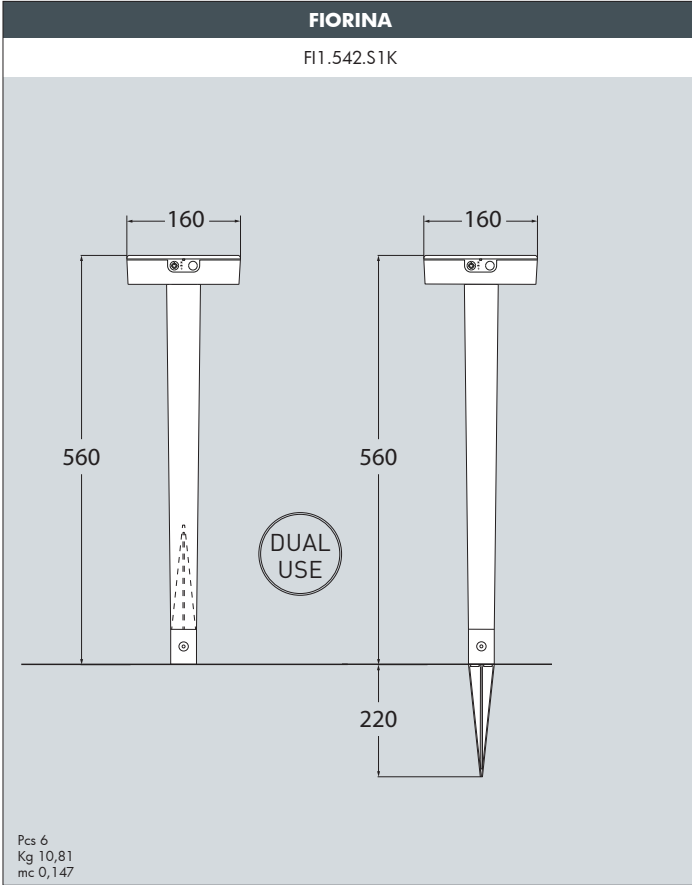

FELICE

MODERN SOLAR LED



SOLAR bollard with motion sensor and replaceable battery. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Provided with TÜV-CB certified, Kelvin settable LED solar module, adjustable in three different working mode. Insulation class III, protection rating IP55.

Bollard SOLARE, con sensore di movimento e batteria sostituibile. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di modulo solare a LED, certificato TÜV-CB con Kelvin impostabile e con tre diverse modalità di utilizzo selezionabili. Classe di isolamento III, grado di protezione IP55.



FE1.573.S1KOP2

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM < 6

AUTO ON-OFF WIRELESS INSTALLATION PIR SENSOR

CE CB IECEE CB SCHEME INSULATION CLASS III PUBLIC RESIDENTIAL RECYCLABLE ANTI-SHOCK UV-TREATED POST SPIKE





FELICE - COMPONENTS

IP55




LED SOLAR MODULE with motion sensor, photovoltaic panel and replaceable battery. Adjustable in 3 different working mode and 3 Kelvin temperature.

MODULO SOLARE A LED provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. 3 diverse modalità di utilizzo e 3 temperature di luce selezionabili.

REFLECTOR designed to gather the lighting output and get its uniform spread. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Opal, clear or colored version available.

RIFLETTORE disegnato per raccogliere il fascio di luce e garantirne un'uniforme distribuzione. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione opale, trasparente o colorata.



CONNECTOR made of shockproof resin material, to fix the solar module to the bollard pole (Ø 95mm).

RACCORDO realizzato in resina antiurto atto ad agganciare il modulo solare allo stelo del bollard (Ø 95mm).

INSTALLATION ELEMENTS:

- POLES for bollard versions
- SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:

- STELI per versione bollard
- PICCHETTO per installazione nel terreno




Dimensions and weight

Diameter: Ø220 mm
Height: 180/330/730 mm
Weight: 1,2/1,4/2,1 Kg

Moulded colours:



Diffuser :




SOLAR MODULE



POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
5V/2W	max 280 lm	6500 K	.S1K
		4000 K	
		2700 K	

SOLAR MODULE




Technical details on page 596.

3 WORKING MODE

WORKING MODE	SUMMER MODE	WINTER MODE	SENSOR MODE	STANDBY MODE
	AUTONOMY 25h (at fully charged battery)	AUTONOMY 46h (at fully charged battery)	423 SENSOR DETECTIONS (at fully charged battery)	NO WORKING TO PRESERVE THE BATTERY
CHARGING TIME 6h at 60.000 Lux (full sunny day)				

CCT SETTABLE

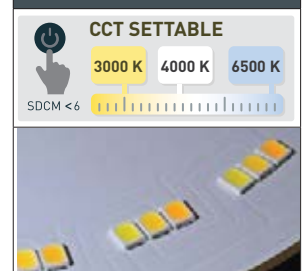

Press the switch to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.

REPLACEABLE BATTERY



- LiFePO4 IFR 26650 3,3Ah-3,2V
- No risk of explosion
- Working temperature -10° to +60°C
- Longer Lifetime

MOTION SENSOR



- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

CCT SETTABLE LED



- 3000K/4000K/6500K
- CRI >80
- SDCM <6




SOLAR PANEL

- 5V/2W
- Monocrystalline PET type
- Antishock material

FELICE

MODERN SOLAR LED



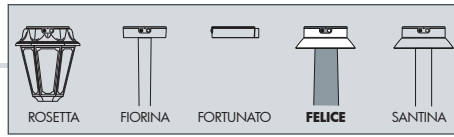

FELICE 800
FE1.575.S1K

Pcs 4
Kg 11,13
mc 0,147

FELICE 400
FE1.574.S1K

Pcs 12
Kg 17,61
mc 0,216

FELICE 200
FE1.573.S1K


Pcs 18
Kg 23,20
mc 0,207

FELICE 200 SPIKE
FE1.572.S1K

Pcs 18
Kg 29,99
mc 0,207

SANTINA

MODERN SOLAR LED



SOLAR bollard with motion **sensor** and **replaceable battery**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with spike post in different sizes or with base for ground fixation. Provided with TÜV-CB certified, **Kelvin settable LED solar module**, adjustable in **three different working mode**. Insulation class III, protection rating IP55.

*Gamma di bollard **SOLARI**, con sensore di movimento e **batteria sostituibile**. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con palo a picchetto in diverse altezze o con base per installazione al suolo con tasselli. Fornito completo di **modulo solare a LED**, certificato TÜV-CB con **Kelvin impostabile** e con **tre diverse modalità di utilizzo selezionabili**. Classe di isolamento III, grado di protezione IP55.*



CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

AUTO ON-OFF WIRELESS INSTALLATION PIR SENSOR 120° Smt.

CE CB IECEE CB SCHEME INSULATION CLASS III PUBLIC RESIDENTIAL RECYCLABLE ANTI-SHOCK UV-TREATED POST SPIKE

SL1.257.S1KOP2





SANTINA - COMPONENTS

IP55




LED SOLAR MODULE with motion sensor, photovoltaic panel and replaceable battery. Adjustable in 3 different working mode and 3 Kelvin temperature.

MODULO SOLARE A LED provvisto di sensore di movimento, pannello fotovoltaico e batteria sostituibile. 3 diverse modalità di utilizzo e 3 temperature di luce selezionabili.

REFLECTOR designed to gather the lighting output and get its uniform spread. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Opal, clear or colored version available.

RIFLETTORE disegnato per raccogliere il fascio di luce e garantirne un'uniforme distribuzione. Realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione opale, trasparente o colorata.



CONNECTOR made of shockproof resin material, to fix the solar module to the bollard pole (Ø 60mm).

RACCORDO realizzato in resina antiurto atto ad agganciare il modulo solare allo stelo del bollard (Ø 60mm).

INSTALLATION ELEMENTS:
-POLES with base for ground fixation
-SPIKE poles for in-ground fixation


ELEMENTI DI FISSAGGIO:
-STELI con base per fissaggio al suolo mediante tasselli
-STELI a picchetto per fissaggio nel terreno



Dimensions and weight

Diameter: Ø220 mm
Height: 300/500/800 mm
Weight: 1,8/2,1/2,6 Kg

Moulded colours:



SOLAR MODULE



POWER	LUMINOUS FLUX	COLOUR TEMP.	*ADD. SUFFIX
5V/2W	max 280 lm	6500 K	.S1K
		4000 K	
		2700 K	




Technical details on page 596.

3 WORKING MODE



SUMMER MODE	WINTER MODE	SENSOR MODE	STANDBY MODE
AUTONOMY 25h (at fully charged battery)	AUTONOMY 46h (at fully charged battery)	423 SENSOR DETECTIONS (at fully charged battery)	NO WORKING TO PRESERVE THE BATTERY
CHARGING TIME 6h at 60.000 Lux (full sunny day)			

CCT SETTABLE

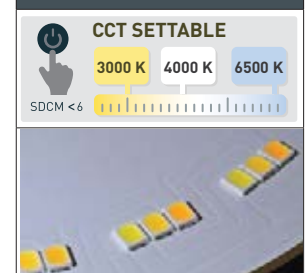

Press the switch to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.

REPLACEABLE BATTERY



- LiFePO4 IFR 26650 3,3Ah-3,2V
- No risk of explosion
- Working temperature -10° to +60°C
- Longer Lifetime



MOTION SENSOR

- PIR Sensor control
- Detection angle 120°
- Fields of detection up to 5mt
- Active for 25 sec.

CCT SETTABLE LED



- 3000K/4000K/6500K
- CRI >80
- SDCM <6




SOLAR PANEL

- 5V/2W
- Monocrystalline PET type
- Antishock material

SANTINA

MODERN SOLAR LED



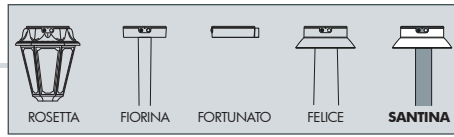

SANTINA 800
SL1.257.S1K

Pcs 1
Kg 3,46
mc 0,057

SANTINA 500
SL1.256.S1K

Pcs 1
Kg 2,77
mc 0,035

SANTINA 300
SL1.255.S1K

Pcs 1
Kg 2,19
mc 0,025

SANTINA 800 SPIKE
SL1.260.S1K

Pcs 1
Kg 3,73
mc 0,077

SANTINA 500 SPIKE
SL1.259.S1K

Pcs 1
Kg 2,87
mc 0,057

SANTINA 300 SPIKE
SL1.258.S1K

Pcs 1
Kg 2,62
mc 0,035

REFERENCES	LAMPS	POST	URBAN MODERN	URBAN CLASSIC	GARDEN	BULKHEAD	BOLLARD	FLOODLIGHT	BRICKLIGHT	IN-GROUND	DOWNLIGHT	UP&DOWN	COMPANY
------------	-------	------	--------------	---------------	--------	----------	---------	------------	------------	-----------	-----------	---------	---------



UP&DOWN

MAMETE

UP & DOWN



Luminaries suitable for wall or ground installation with directed light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP67.



Lampada idonea ad installazione a parete o al suolo con emissione della luce direzionata. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare. Fornita con inclusa lampadina a LED G9, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



2A3.000.Z1L


GROUND INSTALLATION



1A3.000.Z1L

110

MADE IN ITALY



MAMETE - COMPONENTS

IP67



COVER made in shockproof resin material, UV rays stabilized, rust and corrosion free. Round or square shape available.

COVER in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in versione squadrata o tondeggiante.

BASE made in shockproof resin material, UV rays stabilized, rust and corrosion free. Suitable for wall or ground installation.


BASE in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per installazione a parete o al suolo.

HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

CASSA realizzata in resina antiurto. Provvista di portalamпада G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



MAMETE

130



Dimensions and weight

Height: 134mm (round) - 130mm (square)
Width : 60 mm
Depth: 60 mm
Weight: 0,20 Kg

Cover colours:

Black White Grey

Diffuser PC:

Frosted
Blue Green Orange

G9 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	1,7 W	150 Lm	4000 K	.Z1L
			3000 K	.Z1R

Luminaires supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation:

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **100-240V:** wide voltage range to protect the driver from power surges.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

MAMETE

UP&DOWN



MADE IN ITALY



MAMETE SQUARE

1A3.000.Z1L


1,7W

1A3.000.Z1R


4000K

G9 LED LAMP INCLUDED

3000K

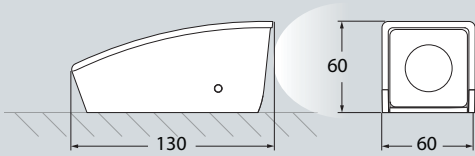

GROUND INSTALLATION



WALL INSTALLATION

Pcs 50
Kg 13,1
mc 0,057

MAMETE ROUND

2A3.000.Z1L


1,7W

2A3.000.Z1R


4000K

G9 LED LAMP INCLUDED

3000K

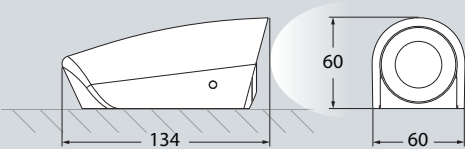

GROUND INSTALLATION



WALL INSTALLATION

Pcs 50
Kg 13,7
mc 0,057

ABRAM

UP & DOWN



Bulkhead lamp with UP&DOWN light emission, available in three different sizes and wattage versions. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamps included**. Insulation class II, Protection rating IP55.

Plafoniera con emissione della luce UP&DOWN, disponibile in tre diverse misure e potenze. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED R7s con Kelvin impostabile, certificata TÜV, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




AB1.000.J1K

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6





ABRAM - COMPONENTS

IP55



COVER made in shockproof resin material, UV-rays stabilized, rust and corrosion free. Designed for getting up&down light emission. Three different sizes available.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disegnata per ottenere un'emissione bidirezionale della luce. Disponibile in tre diverse misure.

Clear **MODULE** made in shockproof resin material, UV-rays stabilized, consisting of a cover and a base suitable for the electrical devices fixation. Provided with silicone rubber gasket to ensure high protection against external agents and supplied complete with **R7s led lamp**.

MODULO trasparente realizzato in resina antiurto stabilizzata ai raggi UV, composto da un coperchio e da una base, adatta ad alloggiare gli accessori elettrici. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni e fornito completo di lampadina led R7s.

Wall BASE designed for hosting the led module. Made in shockproof resin material, UV-rays stabilized, rust and corrosion free.

BASE a muro disegnata per accogliere il modulo led. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

ABRAM

— 155/195/265 —



Dimensions and weight

Width: 155/195/265 mm
Height: 120 mm
Depth: 60 mm
Weight: 0,36/0,44/0,60 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Clear

LED LAMPS






Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

R7s LED

100 - 240 V




LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
 R7s LED — 78 —	3,5 W	365 lm	6500 K	.J1K
			4000 K	
			2700 K	
 R7s LED — 118 —	7,5 W	790 lm	6500 K	.K1K
			4000 K	
			2700 K	
 R7s LED — 189 —	10,5 W	1160 lm	6500 K	.P1K
			4000 K	
			2700 K	

Up&down bulkhead supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** R7s standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ABRAM

UP&DOWN



MADE IN ITALY



ABRAM 150 AB1.000.J1K

3,5W

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 30
Kg 11
mc 0,057

ABRAM 190 AB2.000.K1K

7,5W

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 30
Kg 13,3
mc 0,057

ABRAM 270 AB3.000.P1K

10,5W

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 14
Kg 8,5
mc 0,057


Bulkhead lamp with no visible screws and UP&DOWN light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient **E27 LED lamp** suitable for outdoor use **included**. Insulation class II, protection rating IP66.




Plafoniera senza viti a vista con emissione della luce UP&DOWN. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina LED E27 adatta ad uso in ambiente esterno, certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP66.



1A1.000.F1R

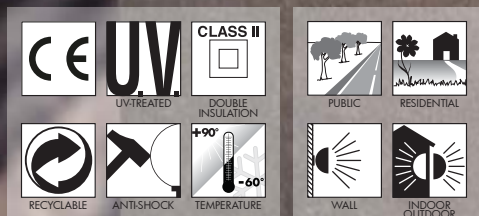



FRANCY - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material UV-rays stabilized. Designed for getting UP&DOWN or side light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV. Disegnata per ottenere un'emissione laterale della luce.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided with E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampana E27 e di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



Dimensions and weight

Width: 130 mm
Height: 300 mm
Depth: 90 mm
Weight: 0,7 Kg

Moulded Colours:


Black Grey White

Diffuser PMMA:

Opal

E27

E27 with sensor

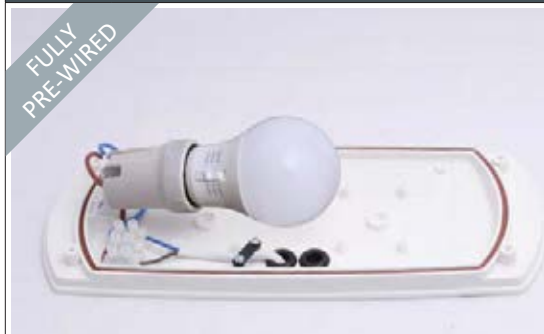

Bulkhead supplied **fully pre-wired** with **E27** lampholder. Provided with TÜV-CB certified, long-life, efficient **E27 LED lamp** suitable for outdoor use. Quick and easy lamp replacement for a very simple maintenance after installation.

Bulkhead supplied **fully pre-wired** with **E27** lampholder and **LED lamps** as an option. Complete with microwave daylight and motion **sensor**. Sensor operating voltage: 220-240V. (120V version available on demand).

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
FILAMENT LED E27	6,5 W	800 lm	2700 K	.F1R
CCT SET LED E27 (*)	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
FILAMENT LED E27	6,5 W	800 lm	2700 K	.S1R
CCT SET LED E27 (*)	8,5 W	920 lm	6500 K 4000 K 2700 K	.VSK

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.


CCT SETTABLE LED LAMP (*)




CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

6,5W filament
8,5W CCT
 = **60W incandescent**
SAVE up to 89%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

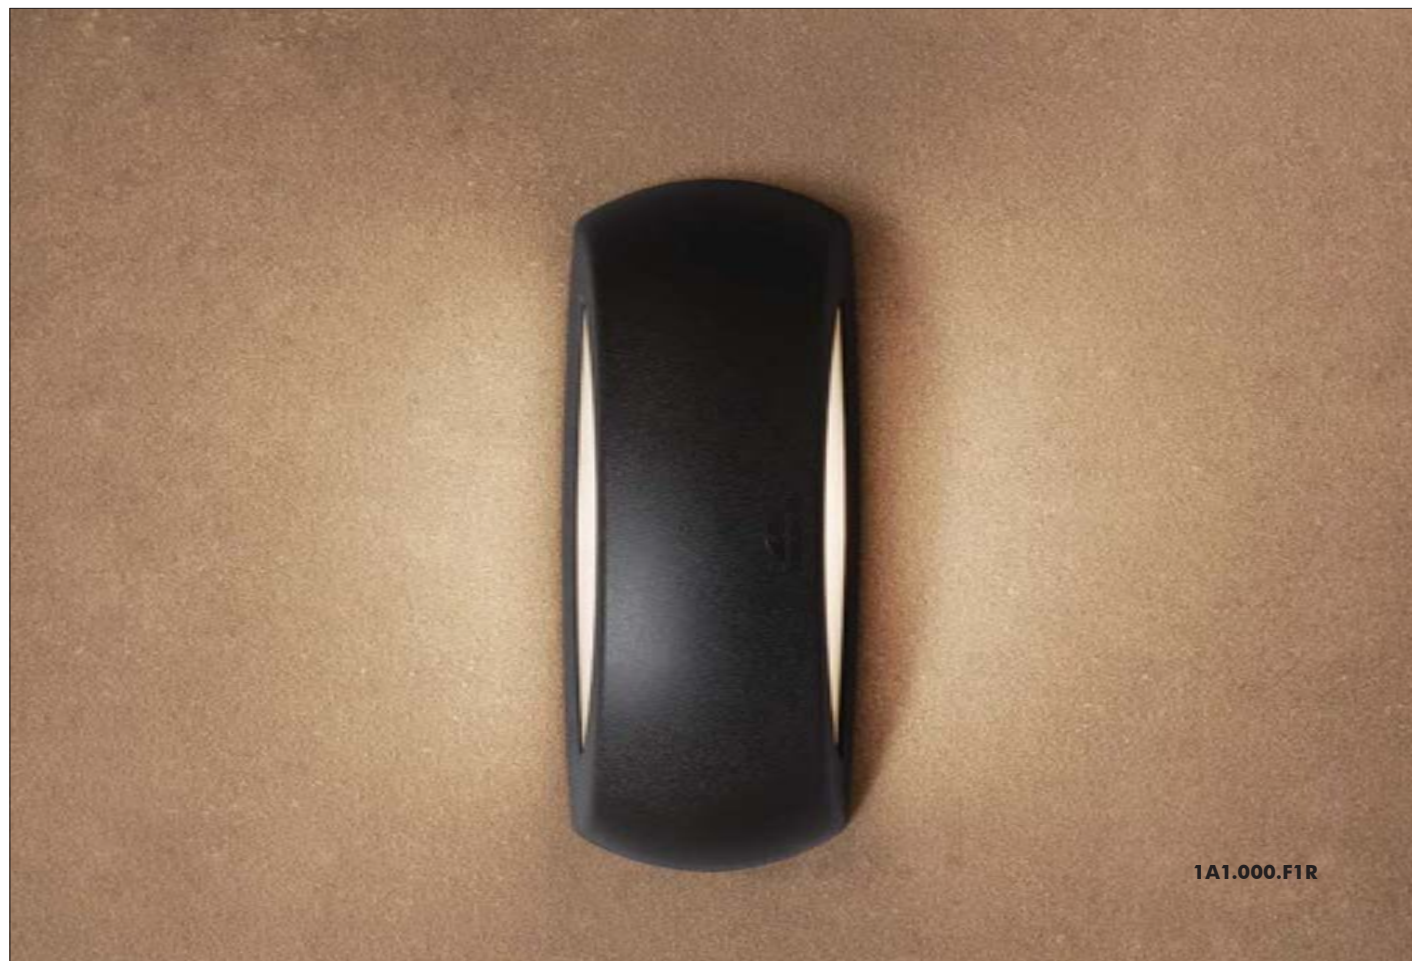

MADE IN ITALY



FRANCY		
6,5W	2700K	1A1.000.F1R
8,5W	2700K/4000K/6500K	1A1.000.V1K
E27 LED LAMP INCLUDED		
Pcs 24 Kg 18,2 mc 0,12		


MARTA 90

UP & DOWN



Up&down bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamps**. Insulation class II, Protection rating IP55.

Plafoniera up&down realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura singola ed emissione della luce in una sola direzione o con apertura doppia ed emissione della luce up&down. Fornito nella versione standard con inclusa lampadina a LED GU10 con Kelvin impostabile certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



2A4.000.L2K


CCT SETTABLE

2700 K 4000 K

SDCM <3

RECYCLABLE	ANTISHOCK	TEMPERATURE	WALL	INDOOR/OUTDOOR





MARTA 90 - COMPONENTS

IP55




BODY made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Available with double openings for up&down light emission or with single opening for one side light emission.

CORPO in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura doppia ed emissione della luce UP&DOWN o con apertura singola ed emissione della luce in una sola direzione.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



BASE made of shockproof resin material suitable for the electrical devices fixation and provided with single or double GU10 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici. Fornita completa di portalampe GU10 singolo o doppio.

MARTA 90



Dimensions and weight

Width: 92 mm
Height: 170 mm
Depth: 80 mm
Weight: 0,5 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted Green Orange
Blue

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GU10 LED

100 - 240 V



	LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
MARTA 90-1L	GU10 LED	3,5 W	366 lm	4000 K 2700 K	.U1K
	GU10 LED	6 W	615 lm	4000 K 2700 K	.L1K
MARTA 90-2L	GU10 LED	2x 3,5W 7 W	732 lm	4000 K 2700 K	.U2K
	GU10 LED	2x 6W 12 W	1230 lm	4000 K 2700 K	.L2K


Up&down bulkhead supplied as standard with single or double TÜV-CB certified long-life, efficient and Kelvin settable GU10 LED lamps included. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W = **35W**
366 Lm = **HALOGEN**
SAVE 90%

6W = **50W**
615 Lm = **HALOGEN**
SAVE 88%

CCT SETTABLE LED LAMP

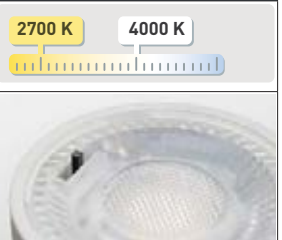


CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

MARTA 90

UP & DOWN

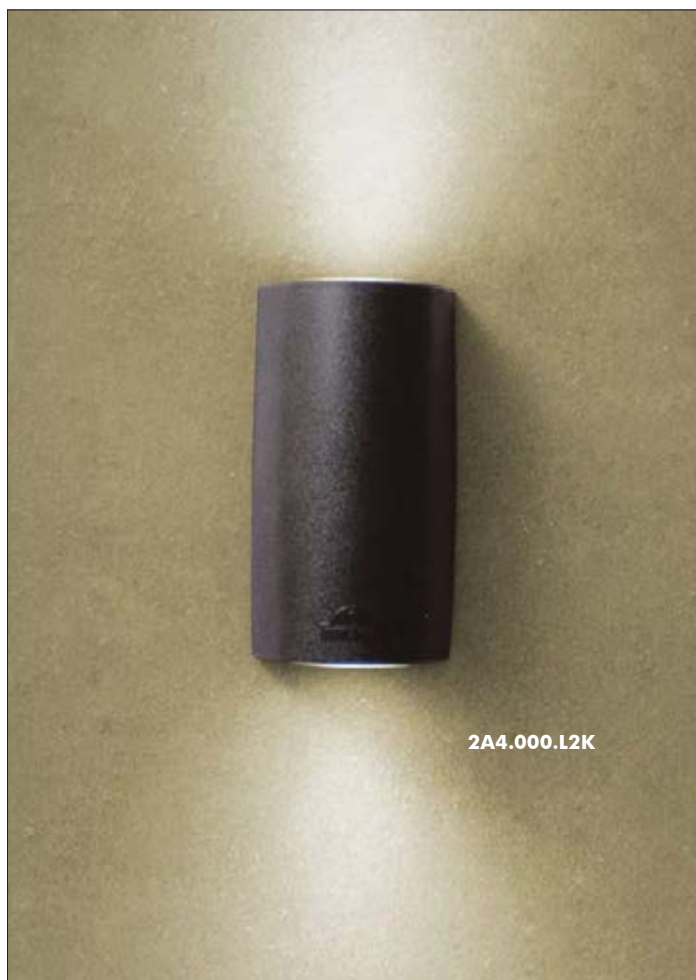

MADE IN ITALY



MARTA 90-1L	
3,5W	1A4.000.U1K
6W	1A4.000.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
<p>Pcs 36 Kg 17,3 mc 0,12</p>	

MARTA 90-2L	
2x3,5W	2A4.000.U2K
2x6W	2A4.000.L2K
2 CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
<p>Pcs 36 Kg 21,9 mc 0,12</p>	

MARTA 160

UP & DOWN



Up&down bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Single opening version available also with E27 lampholder. Insulation class II, Protection rating IP55.



*Plafoniera up&down realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura singola ed emissione della luce in una sola direzione o con apertura doppia ed emissione della luce up&down. Fornita con **include lampadine a LED GX53 con kelvin impostabile** certificate TÜV-CB, di lunga durata ed elevata efficienza o provvista di portalampada E27. Classe di isolamento II, grado di protezione IP55.*




2A6.000.WUD2K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





MARTA 160 - COMPONENTS

IP55



BODY made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Available with double openings for up&down light emission or with single opening for one side light emission.

CORPO in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura doppia ed emissione della luce up&down o con apertura singola ed emissione della luce in una sola direzione.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



BASE made of shockproof resin material suitable for the electrical devices fixation and provided with single or double GX53 lampholder. For single opening version, the base can be supplied also with E27 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici. Fornita completa di portalamпада GX53 singolo o doppio. Nella versione con apertura singola la base può essere fornita anche con portalamпада E27.



Dimensions and weight

Width: 164 mm
Height: 192 mm
Depth: 145 mm
Weight: 1,1 Kg

Moulded colours:



Diffuser PC:



GX53 LED

100 - 240 V

	LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
MARTA 160-1L		3 W	410 lm	6500 K	.G1K
				4000 K	
				3000 K	
MARTA 160-2L		2x3 W 6 W	820 lm	6500 K	.G2K
				4000 K	
				3000 K	
MARTA 160-2L		2x10 W 20 W	2580 lm	6500 K	.D2K
				4000 K	
				3000 K	

Up&Down bulkhead supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

E27

100 - 240 V

*ADD. SUFFIX

	LAMP	max 110 mm	*ADD. SUFFIX
MARTA 160-1L E27	E27 (CFL-LED)	↔	.E27


The E27 version is available only with single opening for one side light emission.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

MARTA 160

UP & DOWN

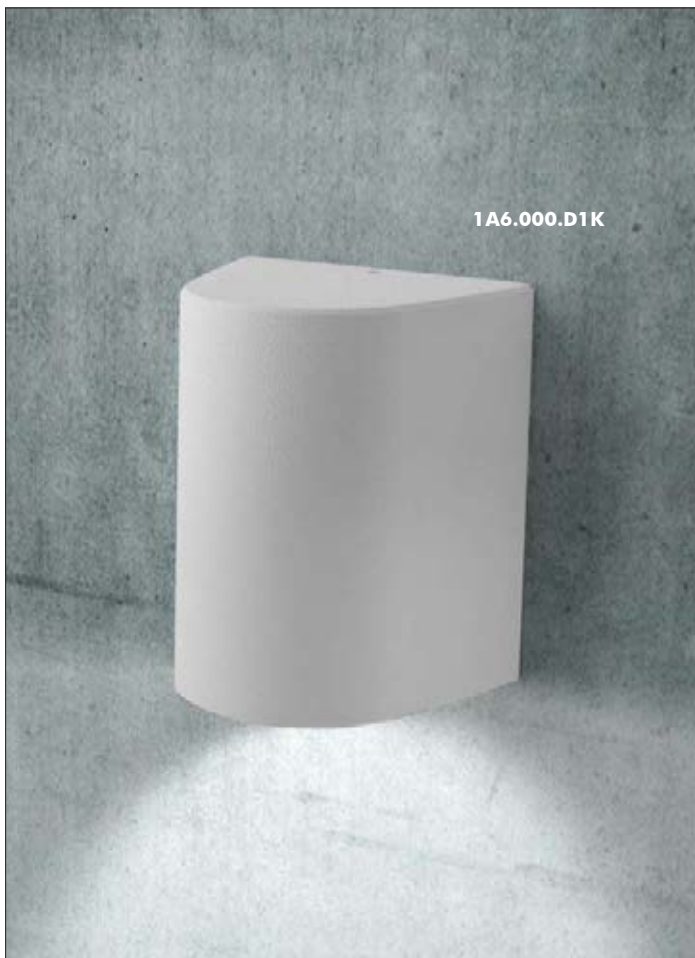

MADE IN ITALY



MARTA 160-1L GX53

3W	1A6.000.G1K
10W	1A6.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 26
mc 0,12

MARTA 160-2L GX53

2x3W	2A6.000.G2K
2x10W	2A6.000.D2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 28
mc 0,12

MARTA 160-1L E27

E27 lampholder	1A6.000.E27
-----------------------	-------------

Pcs 18
Kg 20
mc 0,12




FRANCA 90

UP & DOWN



LED lamp range in modern style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings or on spike. Wall version available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Insulation class II, protection rating IP55.

Collezione di lampade a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per installazioni a parete, a soffitto o su picchetto. Disponibile con apertura singola ed emissione della luce in una sola direzione o con apertura doppia ed emissione della luce up&down. Fornita con inclusa lampadina a LED GU10 con Kelvin impostabile, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




3A7.003.U2K

CCT SETTABLE

2700 K 4000 K

SDCM <3



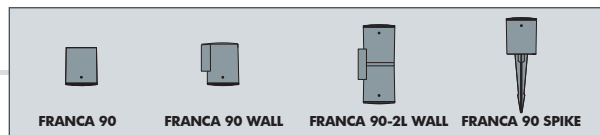

FRANCA 90 - COMPONENTS

IP55




COVER with no visible screws made of shockproof resin material.

COVER senza viti a vista realizzata in resina antiurto.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

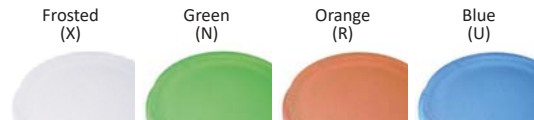

CONNECTION RING made of shockproof resin material, provided with GU10 lampholder.

GHIERA di raccordo realizzata in resina antiurto fornita completa di portalamпада GU10.

BODY made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

INSTALLATION ELEMENTS

- BRACKETS for single or double lights versions
- SPIKE for in ground installation.

ELEMENTI DI FISSAGGIO:

- SUPPORTI per installazione a parete con luce singola o doppia
- PICCHETTO per l'installazione nel terreno.



Dimensions and weight

Diameter: Ø95 mm
Height: 115 mm
Weight: 0,4 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted Green Orange
Blue

LED LAMPS





LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GU10 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3,5 W	366 lm	4000 K	.U1K
			2700 K	
	6 W	615 lm	4000 K	.L1K
			2700 K	


3.5W = 35W
366 Lm HALOGEN
SAVE 90%

6W = 50W
615 Lm HALOGEN
SAVE 88%

Up&down bulkhead supplied as standard with single or double TÜV-CB certified long-life, efficient and **Kelvin settable GU10 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

CCT SETTABLE LED LAMP





CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

FRANCA 90

UP & DOWN

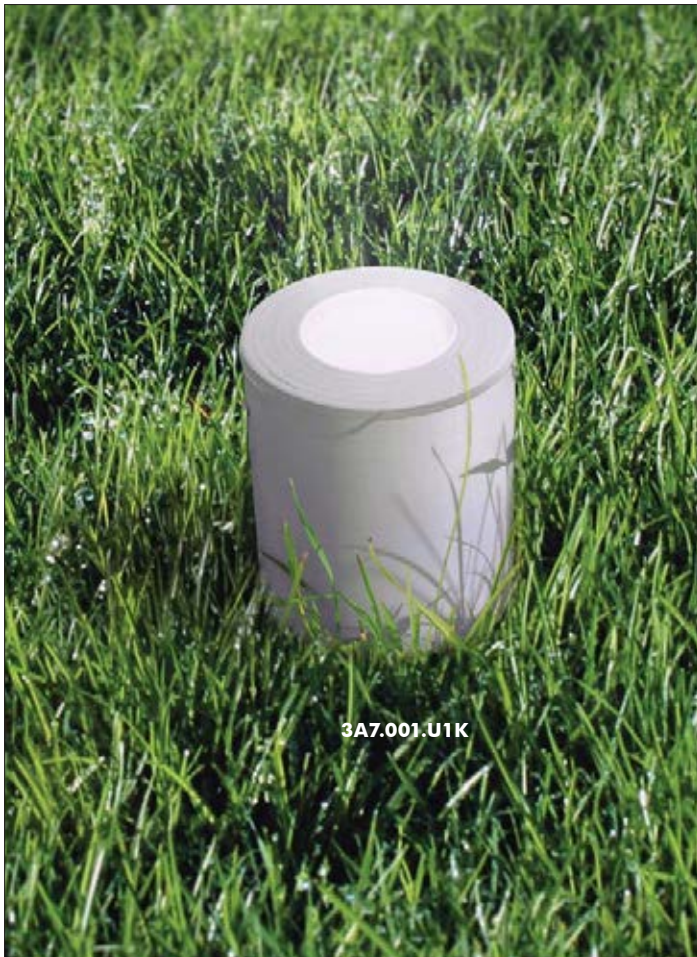

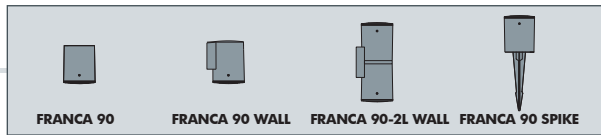

FRANCA 90	
3,5W	3A7.000.U1K
6W	3A7.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 12,6
mc 0,09

FRANCA 90 SPIKE	
3,5W	3A7.001.U1K
6W	3A7.001.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 13,6
mc 0,09

FRANCA 90-1L WALL	
3,5W	3A7.002.U1K
6W	3A7.002.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 13,6
mc 0,09

FRANCA 90-2L WALL	
2 x 3,5W	3A7.003.U2K
2 x 6W	3A7.003.L2K

2 CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 22
mc 0,12



DOWNLIGHT

TERESA 50

DOWNLIGHT/DECKLIGHT



Luminaries suitable for downlight and decklight installation with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP 67.

Lampada idonea ad incasso a soffitto e a muro senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornita con inclusa lampadina a LED G9, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



TERESA
210.000



TERESA 1L
211.000



TERESA 2L
212.000



TERESA
SQUARE
214.000



210.000.Z1L



DOWNLIGHT INSTALLATION




DECKLIGHT INSTALLATION



	UV-TREATED	DOUBLE INSULATION	
RECYCLABLE	ANTI-SHOCK	TEMPERATURE	

DOWNLIGHT	RECESSED	RECESSED	INDOOR OUTDOOR
PUBLIC	RESIDENTIAL	WALK-OVER	

MADE IN ITALY



TERESA 50 - COMPONENTS

IP67



METAL SPRING suitable for downlight and decklight installation.


MOLLETTA METALLICA per permettere l'installazione in controsoffitti, pavimenti e divisori in legno.

HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

CASSA realizzata in resina antiurto. Provvista di portalampada G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

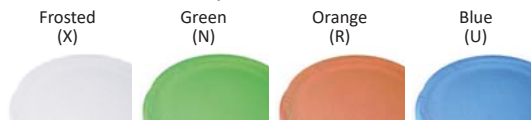

COVER with no visible screws made in shockproof resin material, UV rays stabilized, rust and corrosion free. Plain (round or square), one-opening or two-opening versions available, for a diffuse or directed light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione aperta (quadrata o ad anello), con una apertura o con due aperture, per permettere un'emissione della luce diffusa o direzionata.

TERESA 50



Dimensions and weight
Installation housing depth: 70mm
Diameter: Ø 50 mm
Weight: 0,2 Kg

Cover colours:

Black White Grey

Diffuser PC:

Frosted
Blue Green Orange

LED LAMPS



LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

G9 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	1,7 W	150 Lm	4000 K	.Z1L
			3000 K	.Z1R



Recessed, downlight or decklight luminaires supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **100-240V:** wide voltage range to protect the driver from power surges.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TERESA 50





DOWNLIGHT/DECKLIGHT

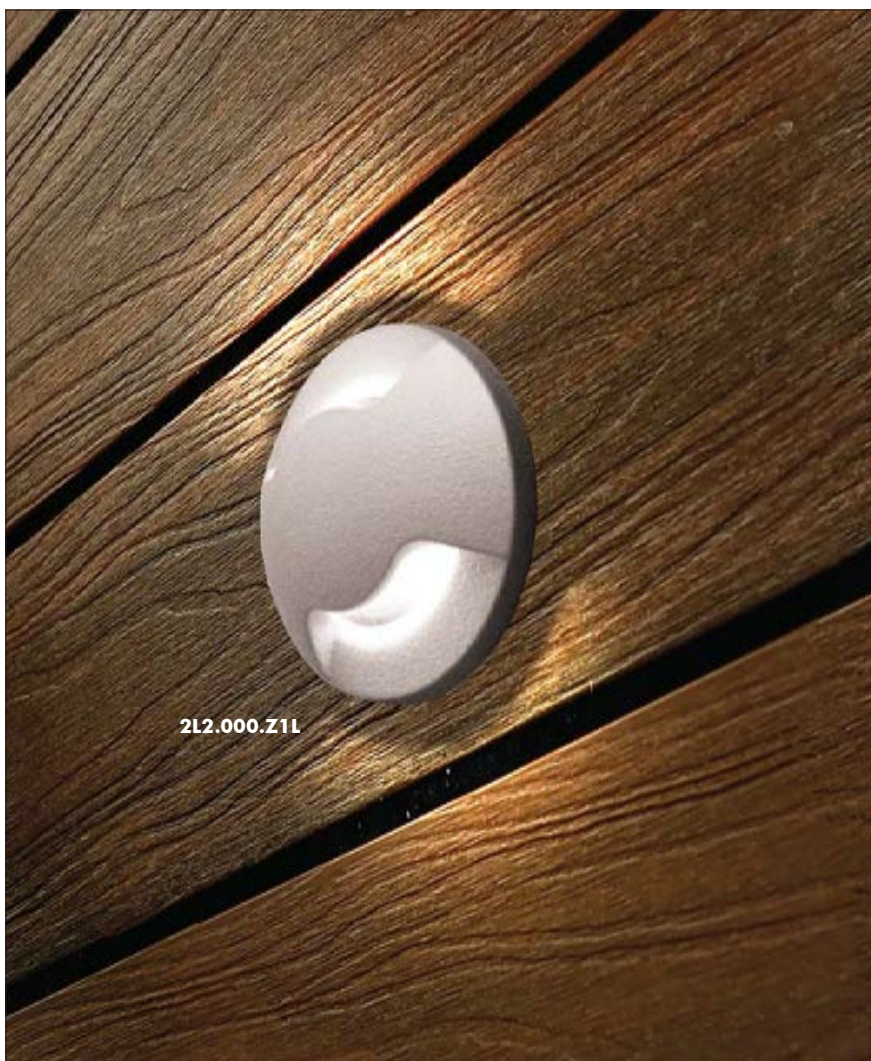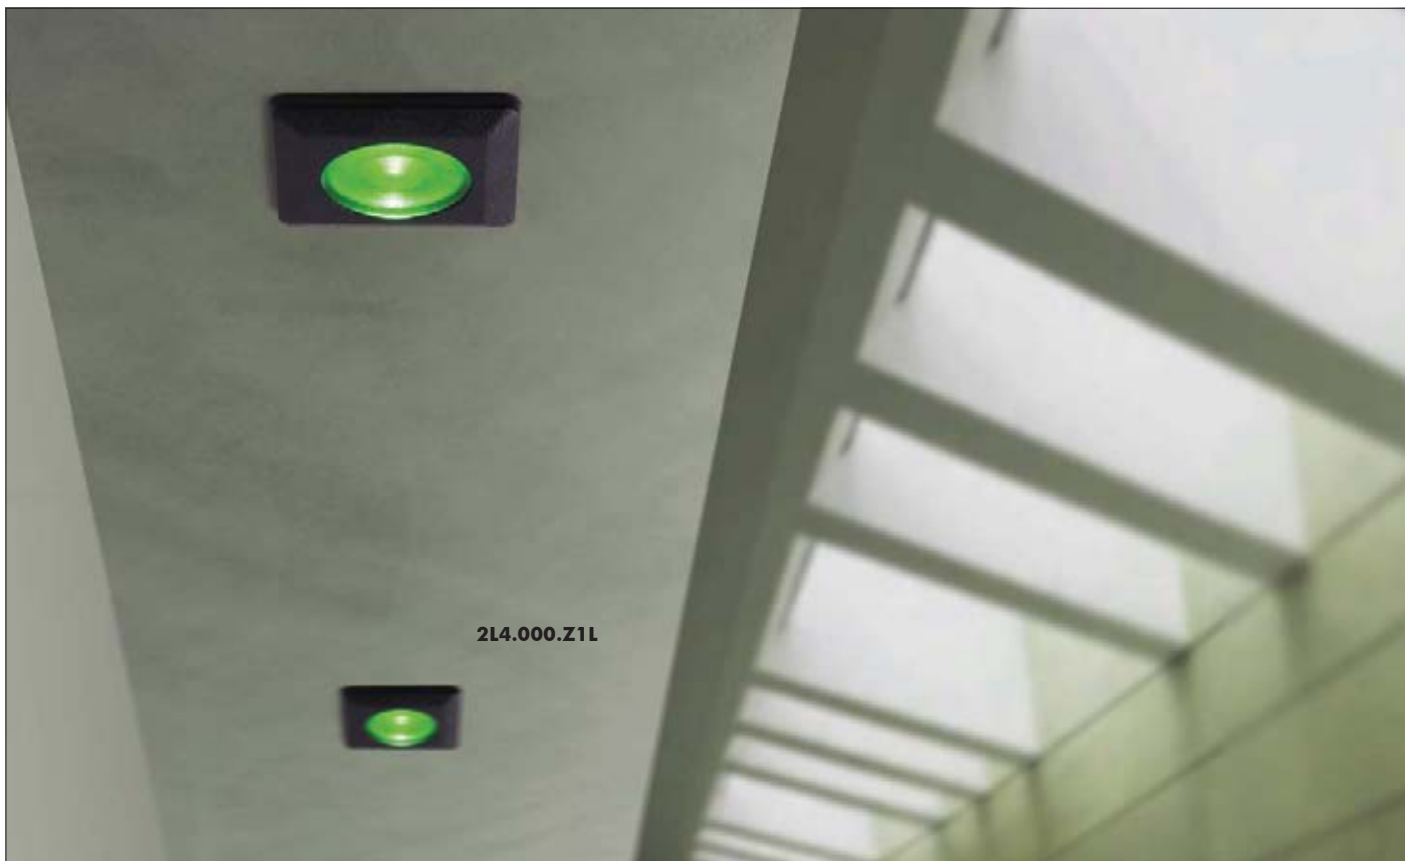

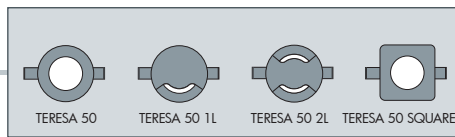

TERESA 50





210.000.Z1L	1,7W	210.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Pcs 75
Kg 13,1
mc 0,057

TERESA 50 SQUARE





214.000.Z1L	1,7W	214.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Pcs 75
Kg 13,1
mc 0,057

TERESA 50 1L





211.000.Z1L	1,7W	211.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Pcs 75
Kg 13,1
mc 0,057

TERESA 50 2L

212.000.Z1L	1,7W	212.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Pcs 75
Kg 13,1
mc 0,057

TERESA 90

DOWNLIGHT



Recessed downlight luminaries with round shape and no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable **GU10 LED lamps included**. Insulation class II, protection rating IP55 (optical unit).

Lampada circolare per incasso a soffitto, senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED G9, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55 (vano ottico).




310.000.L1K

CCT SETTABLE


2700 K 4000 K

SDCM <3





TERESA 90 - COMPONENTS



COVER made of shockproof resin material, designed to grant protection and safety to the electrical connections. Provided of holes with cable tearproof function.

***CALOTTA** realizzata in resina antiurto, atta a garantire protezione e sicurezza alle connessioni elettriche. Provvista di fori con funzione antistrappo del cavo.*

HOUSING made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Installed with GU10 lampholder and metal spring to allow recessed downlight installation.

***CASSA** realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Provvista di portalamпада GU10 e molletta metallica per permetterne l'installazione in controsoffitti.*

DIFFUSER in opal color to grant a uniform spread of the lighting output and get a lower dazzle. Made of shockproof resin material (PC) and complete with silicone rubber gasket to ensure high protection against external agents.

***DIFFUSORE** in colore opale per garantire una distribuzione uniforme del fascio luminoso e ridurre l'abbagliamento. Realizzato in resina antiurto (PC) e completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

TERESA 90



Dimensions and weight
Installation housing depth: 100mm
Diameter: Ø 90 mm
Weight: 0,192 Kg

Moulded colours:
 Black White Grey

Diffuser PC:
 Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GU10 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3,5W	366 Lm	4000 K	.U1K
			2700 K	
	6W	615 Lm	4000 K	.L1K
			2700 K	

Recessed downlight luminaires supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GU10 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W 366 Lm = **35W HALOGEN**
SAVE 90%

6W 615 Lm = **50W HALOGEN**
SAVE 88%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TERESA 160

DOWNLIGHT



Recessed downlight luminaries with round shape and no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Insulation class II, protection rating IP55.

Lampada circolare per incasso a soffitto, senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



410.000.D1K


CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE		DOWNLIGHT	INDOOR OUTDOOR



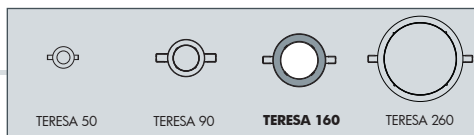

TERESA 160 - COMPONENTS

IP55



HOUSING made of shockproof resin material, suitable for the electrical devices fixation into it. Provided complete with GX53 lampholder and metal spring for recessed downlight installation.

CASSA realizzata in resina antiurto, predisposta per il fissaggio al suo interno degli accessori elettrici. Fornita completa di portalamпада GX53 e di molletta metallica per permetterne l'installazione in controsoffitti.

DIFFUSER in opal color to grant a uniform spread of the lighting output and get a lower dazzle. Made of shockproof resin material (PC) and complete with silicone rubber gasket to ensure high protection against external agents. DIFFUSORE in colore opale.

DIFFUSORE in colore opale per garantire una distribuzione uniforme del fascio luminoso e ridurre l'abbagliamento. Realizzato in resina antiurto (PC) e completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

TERESA 160



Dimensions and weight

Installation housing depth: 69mm
Diameter: Ø 160 mm
Weight: 0,347 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Opal

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
 GX53 LED	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	

Recessed downlight luminaries supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** easy to upgrade.
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.

3W
410 Lm = **40W**
incandescent

SAVE 93%

10W
1290 Lm = **100W**
incandescent

SAVE 90%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TERESA 260

DOWNLIGHT



Recessed downlight luminaries with round shape and no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. **Kelvin settable GX53 LED**, or **E27** version available. Insulation class II, protection rating IP55.

*Lampada circolare per incasso a soffitto, senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita nella versione a **LED GX53 con Kelvin impostabile**, o con **E27**. Classe di isolamento II, grado di protezione IP55.*



510.000.B1K

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



TERESA 260 - COMPONENTS

IP55



HOUSING made of shockproof resin material, suitable for the electrical devices fixation into it. Provided complete with GX53 lampholder and metal spring for recessed downlight installation.

CASSA realizzata in resina antiurto, predisposta per il fissaggio al suo interno degli accessori elettrici. Fornita completa di portalampana GX53 e di molletta metallica per permetterne l'installazione in controsoffitti.

DIFFUSER in opal color to grant a uniform spread of the lighting output and get a lower dazzle. Made of shockproof resin material (PC) and complete with silicone rubber gasket to ensure high protection against external agents.
DIFFUSORE in colore opale.

DIFFUSORE in colore opale per garantire una distribuzione uniforme del fascio luminoso e ridurre l'abbagliamento. Realizzato in resina antiurto (PC) e completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

TERESA 260



Dimensions and weight

Installation housing depth: 75mm
Diameter: Ø 260 mm
Weight: 0,735 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Opal


GX53 LED



Recessed downlight luminaries supplied with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
	17 W	2350 lm	6500 K	.E1K
			4000 K	
			2700 K	



7,2W
11,3W
17W = **60W**
100W
150W
incandescent
SAVE 88%

E27



Recessed downlight luminaries supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

*ADD. SUFFIX

E27 (CFL -LED)	max 160 mm	.P27
E27 + SENSOR (CFL -LED)		.PS7

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TERESA RANGE

DOWNLIGHT







TERESA 90 GU10

3,5 W	3L0.000.U1K
6 W	3L0.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K


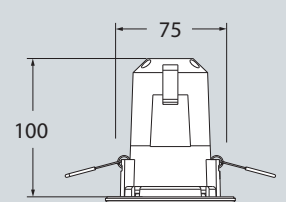



Pcs 40
Kg 10,5
mc 0,92

TERESA 160 GX53

3W	4L0.000.G1K
10W	4L0.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

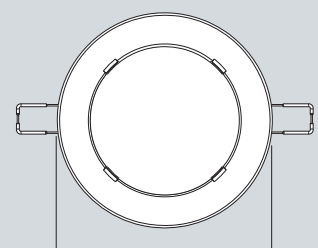
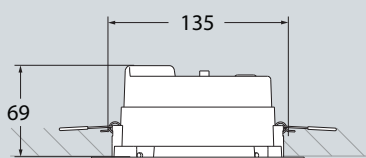



Pcs 18
Kg 8,4
mc 0,092

TERESA 260 GX53

7,2W	5L0.000.A1K
11,3W	5L0.000.B1K
17W	5L0.000.E1K



CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

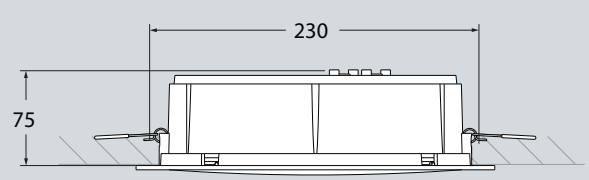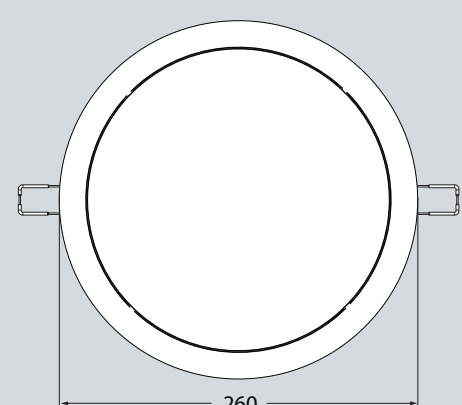Pcs 16
Kg 14,4
mc 0,194

TERESA 260 E27

E27 lampholder	5L0.000.P27
E27 with sensor	5L0.000.PS7

Pcs 16
Kg 14,4
mc 0,194

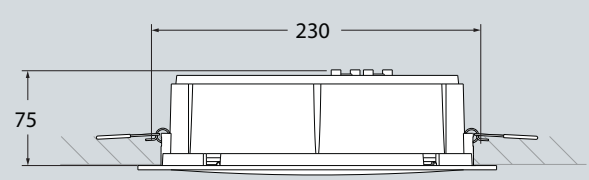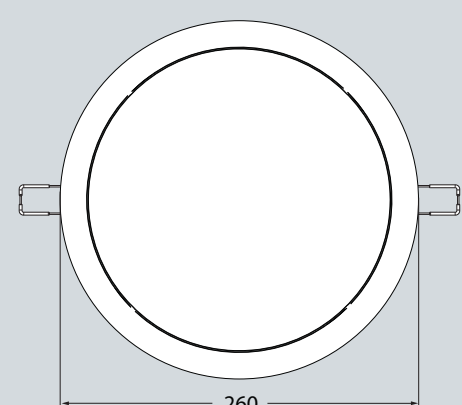LIVIA 60

DOWNLIGHT





LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, and efficient **G9 LED lamps included**. Insulation class II, protection rating IP55.

Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED G9, certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



1A9.000.Z1L

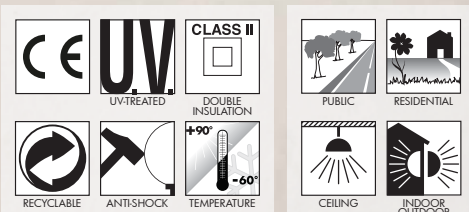



LIVIA 60 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with G9 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada G9.

DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

LIVIA 60



Dimensions and weight

Diameter: Ø60 mm
Height: 69 mm
Weight: 0,10 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

G9 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	1,7 W	150 Lm	4000 K	.Z1L
			3000 K	.Z1R

Ceiling surface downlight supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **100-240V:** wide voltage range to protect the driver from power surges.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA 90

DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GU10 LED lamps included. Insulation class II, protection rating IP 55.

Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED GU10 con Kelvin impostabile, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



2A9.000.L1K


CCT SETTABLE

2700 K 4000 K

SDCM <3

RECYCLABLE	ANTI-SHOCK	TEMPERATURE	CEILING	INDOOR-OUTDOOR





LIVIA 90 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with GU10 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalamпада GU10.

DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

LIVIA 90



Dimensions and weight

Diameter: Ø96 mm
Height: 105 mm
Weight: 0,26 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GU10 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3,5W	366Lm	4000 K	.U1K
			2700 K	
	6W	615 Lm	4000 K	.L1K
			2700 K	


Ceiling surface downlight supplied with TÜV-CB certified, long-life and efficient Kelvin settable GU10 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W = 35W HALOGEN
366 Lm
SAVE 90%

6W = 50W HALOGEN
615 Lm
SAVE 88%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA 160

DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Insulation class II, protection rating IP55.

Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED GX53 con Kelvin impostabile, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




3A9.000.D1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





LIVIA 160 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with GX53 lampholder.


BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada GX53.

DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

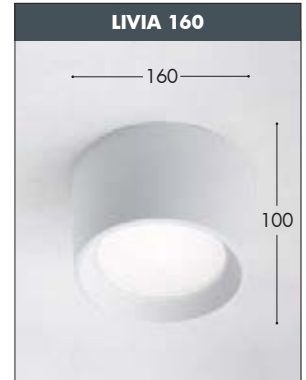

Dimensions and weight

Diameter: Ø160 mm
Height: 100 mm
Weight: 0,76 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V

*ADD. SUFFIX



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
 GX53 LED	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	

Ceiling surface downlight supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.


3W = **40W** incandescent
410 Lm

SAVE 93%

10W = **100W** incandescent
1290 Lm

SAVE 90%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA 180

DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable **E27 high power LED lamps included**. Insulation class II, protection rating IP44.

Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED E27 ad ALTA POTENZA, con Kelvin impostabile certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP44.



E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY


VOLTAGE SURGE RESISTANT



DRIVER SILICONE PROTECTION




CCT SETTABLE

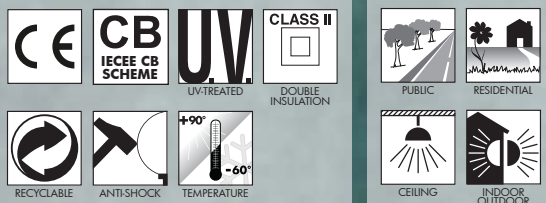

4A9.000.Q1K

MADE IN ITALY



LIVIA 180 - COMPONENTS

IP44



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with E27 lampholder. Designed to allow a correct heat dissipation.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalamпада E27. Progettato per permettere una corretta dissipazione del calore.

DIFFUSER with frosted finishing made of shockproof resin material (PC).

DIFFUSORE satinato in resina antiurto (PC).

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

LIVIA 180



Dimensions and weight

Diameter: Ø180 mm
Height: 200 mm
Weight: 1,10 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

E27 HIGH POWER LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	15 W*	1690 lm	4000 K	.R1K
			3000 K	
	30 W*	3620 lm	4000 K	.Q1K
			3000 K	


Ceiling surface downlight supplied with TÜV certified, long-life, efficient and Kelvin settable E27 high power LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

15W 1690 Lm = 100W incandescent
SAVE 85%

30W 3620 Lm = 50W HQI-SON
SAVE 40%

CCT SETTABLE LED LAMP*



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA RANGE

DOWNLIGHT





LIVIA 60

1A9.000.Z1L	1,7W	1A9.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Pcs 75
Kg 8,4
mc 0,057

LIVIA 90

3,5 W		2A9.000.U1K
6 W		2A9.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 12,6
mc 0,09

LIVIA 160

3W		3A9.000.G1K
10W		3A9.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 15,3
mc 0,092

LIVIA 180

15W		4A9.000.R1K
30W		4A9.000.Q1K

CCT SETTABLE E27 HIGHPOWER LED LAMP INCLUDED
3000K/4000K

Pcs 12
Kg 22,5
mc 0,147

REFERENCES	LAMPS	POST	URBAN MODERN	URBAN CLASSIC	GARDEN	BULKHEAD	BOLLARD	FLOODLIGHT	BRICKLIGHT	IN-GROUND	DOWNLIGHT	UP&DOWN	SOLAR	COMPANY
------------	-------	------	--------------	---------------	--------	----------	---------	------------	------------	-----------	-----------	---------	-------	---------



IN-GROUND

ALDO

IN-GROUND/RECESSED





Luminaries suitable for in-ground and wall recessed installation with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP 67.

Lampada idonea ad incasso a terra e a muro senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornita con inclusa lampadina a LED G9, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



111.000.Z1L

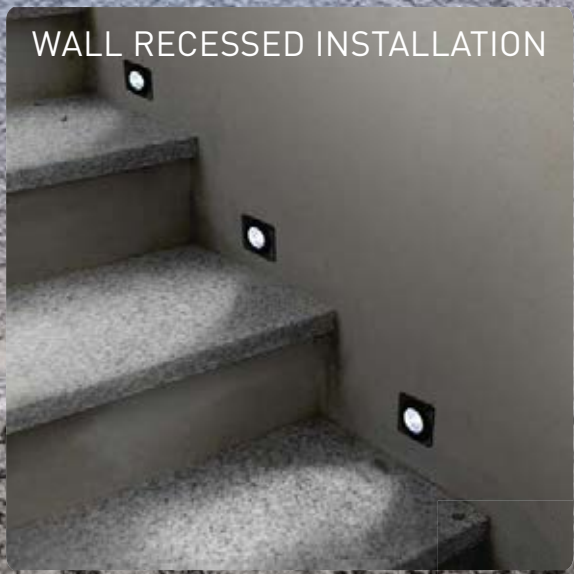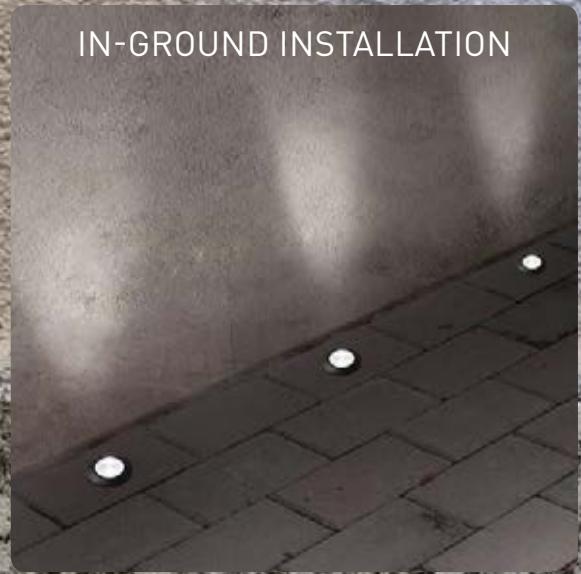



ALDO - COMPONENTS



IP67




COVER with no visible screws made in shockproof resin material, UV rays stabilized, rust and corrosion free. Plain (round or square), one-opening or two-opening versions available, for a diffuse or directed light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione aperta (quadrata o ad anello), con una apertura o con due aperture, per permettere un'emissione della luce diffusa o direzionata.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

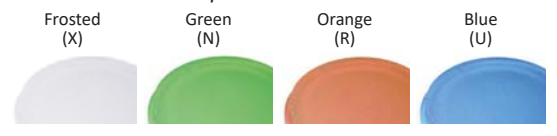

HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

CASSA realizzata in resina antiurto. Provvista di portalampada G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.

INSTALLATION HOUSING made in shockproof resin material to be fixed into the ground or cemented into the wall before installing the luminaries. In case of wall-recessed installation, the housing can be cut to reduce its depth.

CONTRO-CASSA in resina antiurto da fissare al suolo o da cementare nel muro prima dell'installazione degli apparecchi. Nel caso di installazione a muro, la cassa può essere tagliata per ridurre la sua profondità.




Dimensions and weight
Installation housing depth: 110/70mm
Diameter: Ø 50 mm
Weight: 0,2 Kg

Cover colours:
Black White Grey
Diffuser PC:
Frosted
Blue Green Orange



G9 LED

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	1,7 W	150 Lm	4000 K	.Z1L
			3000 K	.Z1R

In-ground or wall recessed luminaries supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **100-240V:** wide voltage range to protect the driver from power surges.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ALDO

IN-GROUND/RECESSED





ALDO

110.000.Z1L	1,7W	110.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Ø50

110
47

70

Pcs 75
Kg 13,1
mc 0,057

ALDO SQUARE

114.000.Z1L	1,7W	114.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

50

110
47

70

Pcs 75
Kg 13,1
mc 0,057

ALDO 1L

111.000.Z1L	1,7W	111.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Ø50

110
47

70

Pcs 75
Kg 13,1
mc 0,057

ALDO 2L

112.000.Z1L	1,7W	112.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Ø50

110
47

70

Pcs 75
Kg 13,1
mc 0,057

CECI 90

IN-GROUND



Drive-over in-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Insulation class II, Protection rating IP67.

Apparecchio per incasso a terra carrabile e senza viti a vista, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornito con inclusa lampadina a LED GU10 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



1F1.000.U1K

CCT SETTABLE

2700 K 4000 K

SDCM <3





CECI 90 - COMPONENTS

IP67




COVER with no visible screws made of shockproof resin material, UV rays stabilized, rust and corrosion free. Round or square design, 2 or 3 light versions available for a diffuse or directed light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nelle versioni quadrata o ad anello, a 2 aperture e a 3 aperture per permettere un'emissione della luce diffusa o direzionata.

DIFFUSER made of high impact and high-pressure load resistant resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto altamente resistente al carico (PC), completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



HOUSING made of shockproof resin material, provided with double holes and double watertight cable glands for safe connecting cable.

CASSA realizzata in resina antiurto, provvista di doppi fori e doppio pressacavo a tenuta stagna, per consentire in maniera sicura l'ingresso e l'uscita delle connessioni elettriche.

INSTALLATION HOUSING made of shockproof resin material to be fixed into the ground before installing the luminaires.

CONTRO-CASSA in resina antiurto da fissare al suolo prima dell'installazione degli apparecchi.

CECI 90



Dimensions and weight

Installation housing depth: 127 mm
Diameter: Ø 92 mm
Weight: 0,35 Kg

Cover colours:

Black Grey

Diffuser PC:

Frosted
Blue Green Orange

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GU10 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GU10 LED	3,5W	366 Lm	4000 K	.U1K
			2700 K	
GU10 LED	6W	615 Lm	4000 K	.L1K
			2700 K	


In-ground supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GU10 LED lamp included. Different wattage available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W = **35W**
366 Lm = **HALOGEN**
SAVE 90%

6W = **50W**
615 Lm = **HALOGEN**
SAVE 88%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

CECI 90

IN-GROUND



1F1.000.U1K



1F2.000.U1K




1F3.000.U1K



1F4.000.ARU1K





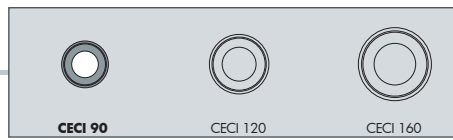

CECI 90

3,5W		1F1.000.U1K
6W		1F1.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K






Pcs 40
Kg 13,7
mc 0,084

CECI 90-3L

3,5W		1F3.000.U1K
6W		1F3.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K






Pcs 40
Kg 13,7
mc 0,084

CECI 90-2L

3,5W		1F2.000.U1K
6W		1F2.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K






Pcs 40
Kg 13,7
mc 0,084

CECI 90-SQ

3,5W		1F4.000.U1K
6W		1F4.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 40
Kg 13,7
mc 0,084

CECI 120

IN-GROUND



Drive-over in-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Insulation class II, Protection rating IP67.



Apparecchio per incasso a terra carrabile e senza viti a vista, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



2F1.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6



CECI 120 - COMPONENTS

IP67




COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Round or square design, 2 or 3 light versions available for a diffuse or directed light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nelle versioni quadrata o ad anello, a 2 aperture e a 3 aperture per permettere un'emissione della luce diffusa o direzionata.

DIFFUSER made of high impact and high-pressure load resistant resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.

DIFFUSORE in resina antiurto altamente resistente al carico (PC), completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



HOUSING made of shockproof resin material, provided with double holes and double watertight cable glands for safe connecting cable.

CASSA realizzata in resina antiurto, provvista di doppi fori e doppio pressacavo a tenuta stagna, per consentire in maniera sicura l'ingresso e l'uscita delle connessioni elettriche.

INSTALLATION HOUSING made of shockproof resin material to be fixed into the ground before installing the luminaries.

CONTRO-CASSA in resina antiurto da fissare al suolo prima dell'installazione degli apparecchi.

CECI 120



Dimensions and weight
Installation housing depth: 93 mm
Diameter: Ø 120 mm
Weight: 0,45 Kg

Cover colours:



Diffuser PC:



LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	


3W = **40W**
410 Lm = incandescent

SAVE 93%

In-ground supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

CECI 120
IN-GROUND







CECI 120

3W 2F1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K






Pcs 36
Kg 15,7
mc 0,084

CECI 120-3L

3W 2F3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K






Pcs 36
Kg 15,7
mc 0,084

CECI 120-2L

3W 2F2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K






Pcs 36
Kg 15,7
mc 0,084

CECI 120-SQ

3W 2F4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K


Pcs 36
Kg 15,7
mc 0,084

CECI 160

IN-GROUND



Drive-over in-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Insulation class II, Protection rating IP67.



Apparecchio per incasso a terra carrabile e senza viti a vista, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



3F3.000.D1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6



CECI 160 - COMPONENTS

IP67




COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Round or square design, 2 or 3 light versions available for a diffuse or directed light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nelle versioni quadrata o ad anello, a 2 aperture e a 3 aperture per permettere un'emissione della luce diffusa o direzionata.

DIFFUSER made of high impact and high-pressure load resistant resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto altamente resistente al carico (PC), completo di guarnizione in gomma silicônica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



HOUSING made of shockproof resin material, provided with double holes and double watertight cable glands for safe connecting cable.

CASSA realizzata in resina antiurto, provvista di doppi fori e doppio pressacavo a tenuta stagna, per consentire in maniera sicura l'ingresso e l'uscita delle connessioni elettriche.

INSTALLATION HOUSING made of shockproof resin material to be fixed into the ground before installing the luminaries.

CONTRO-CASSA in resina antiurto da fissare al suolo prima dell'installazione degli apparecchi.

CECI 160




Dimensions and weight
Installation housing depth: 111 mm
Diameter: Ø 160 mm
Weight: 0,8 Kg

Cover colours:



Diffuser PC:



LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	


In-ground supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.



10W = **100W**
1290 Lm incandescent
SAVE 90%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

CECI 160

IN-GROUND



3F2.000.D1K



3F1.000.D1K




3F4.000.D1K



3F3.000.D1K







CECI 160

10W 3F1.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K






Pcs 18
Kg 14,3
mc 0,084

CECI 160-3L

10W 3F3.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K






Pcs 18
Kg 14,3
mc 0,084

CECI 160-2L

10W 3F2.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K






Pcs 18
Kg 14,3
mc 0,084

CECI 160-SQ

10W 3F4.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 14,3
mc 0,084



REFERENCES

LAMPS

POST

URBAN MODERN

URBAN CLASSIC

GARDEN

BULKHEAD

BOLLARD

FLOODLIGHT

BRICKLIGHT

IN-GROUND

DOWNLIGHT

UP&DOWN

SOLAR

COMPANY


BRICKLIGHT

NINA

RECESSED LAMP



Slim and compact recessed wall lamp with rectangular shape and no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV certified, long-life, efficient, and Kelvin settable R7s LED lamps included. Three different sizes and wattage versions available. Insulation class II, Protection rating IP55.



Lampada rettangolare a LED per incasso a muro dal design compatto e sottile senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED R7s con Kelvin impostabile, certificata TÜV, di lunga durata ed elevata efficienza. Disponibile in tre diverse misure e potenze. Classe di isolamento II, grado di protezione IP55.




6C1.000.J1K

CCT SETTABLE

2700 K 4000 K 6500 K


SDCM <6






NINA - COMPONENTS

IP55

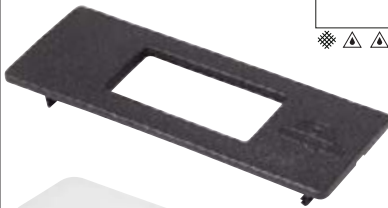

COVER with no visible screws and slim design, made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Three different sizes available.

COVER dal design sottile e senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in tre diverse misure.

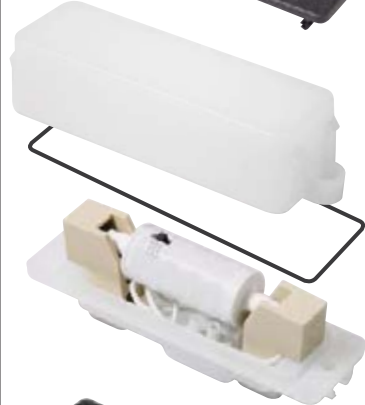

Opal MODULE made of shockproof resin material, UV-rays stabilized, consisting of a cover and a base suitable for the electrical devices fixation. Provided with silicone rubber gasket to ensure high protection against external agents and supplied complete with **R7s led lamp**.

MODULO opale realizzato in resina antiurto stabilizzata ai raggi UV, composto da un coperchio e da una base, adatta ad alloggiare gli accessori elettrici. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni e fornito completo di lampadina led R7s.



INSTALLATION HOUSING made of shockproof resin material, to be cemented into the wall before installing the luminaries. Compact size and reduced depth allowing both outdoor and indoor installation.

CONTRO-CASSA in resina antiurto da cementare nel muro prima dell'installazione degli apparecchi. Il design compatto e la profondità ridotta ne permettono l'istallazione sia all'esterno che all'interno.

NINA



Dimensions and weight
Width: 145/185/255 mm
Height: 50 mm
Installation housing depth: 50 mm
Weight: 0,26/0,31/0,72 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS






Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

R7s LED

100 - 240 V




LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
 R7s LED	3,5 W	365 lm	6500 K	.J1K
			4000 K	
			2700 K	
 R7s LED	7,5 W	790 lm	6500 K	.K1K
			4000 K	
			2700 K	
 R7s LED	10,5 W	1160 lm	6500 K	.P1K
			4000 K	
			2700 K	

Recessed light supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamp** included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** R7s standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

NINA

RECESSED LAMP





NINA 150

3,5W 6C1.000.J1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 50
Kg 13,1
mc 0,057

NINA 190

7,5W 7C1.000.K1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 50
Kg 15,7
mc 0,057

NINA 270

10,5W 8C1.000.P1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 30
Kg 21,6
mc 0,057

Surface wall lamp with square or rectangular shape and downwards directed light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Available in three different sizes and wattage versions. Supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamps included**. Insulation class II, Protection rating IP55.

*Lampada LED a muro dalla forma quadrata o rettangolare con emissione della luce diretta verso il basso. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in tre diverse misure e potenze. Fornita con **inclusa lampadina a LED R7s con Kelvin impostabile**, certificata TÜV, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



LORENZA 150
AS1.000



LORENZA 190
AS2.000



LORENZA 270
AS3.000



AS1.000.J1K

CCT SETTABLE




2700 K

4000 K

6500 K


SDCM <6





LORENZA - COMPONENTS

IP55

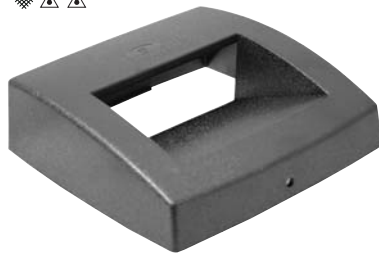

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Designed for hosting the led module, getting downwards directed light emission. Three different sizes available.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disegnata per accogliere il modulo led e consentire un'emissione della luce diretta verso il basso. Disponibile in tre diverse misure.



Clear **MODULE** made of shockproof resin material, UV-rays stabilized, consisting of a cover and a base suitable for the electrical devices fixation. Provided with silicone rubber gasket to ensure high protection against external agents and supplied complete with **R7s led lamp**.



MODULO trasparente realizzato in resina antiurto stabilizzata ai raggi UV, composto da un coperchio e da una base, adatta ad alloggiare gli accessori elettrici. Provvisto di guarnizione in gomma silicônica per garantire un alto livello di protezione contro gli agenti esterni e fornito completo di **lampadina led R7s**.



Wall **BASE** made of shockproof resin material, UV-rays stabilized, rust and corrosion free.

BASE a muro, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

LORENZA

— 150/190/270 —



Dimensions and weight

Width: 150/190/260 mm
Height: 150 mm
Depth: 45 mm
Weight: 0,47/0,55/0,78 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Clear

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

R7s LED

100 - 240 V




LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
R7s LED — 78 —	3,5 W	365 lm	6500 K	.J1K
			4000 K	
			2700 K	
R7s LED — 118 —	7,5 W	790 lm	6500 K	.K1K
			4000 K	
			2700 K	
R7s LED — 189 —	10,5 W	1160 lm	6500 K	.P1K
			4000 K	
			2700 K	

Surface light supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** R7s standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LORENZA

SURFACE LAMP



MADE IN ITALY



LORENZA 150

3,5W AS1.000.J1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 24
Kg 11,3
mc 0,057

LORENZA 190

7,5W AS2.000.K1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 24
Kg 13,4
mc 0,057

LORENZA 270

10,5W AS3.000.P1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 14
Kg 11
mc 0,057


LETI 100 ROUND

RECESSED LAMP



Recessed wall lamp with round shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada LED per incasso a muro con forma circolare, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



LETI 100 ROUND
2C1.000



LETI 100 ROUND-GR
2C2.000



LETI 100 ROUND-EL
2C3.000




LETI 100 ROUND-ST
2C4.000



2C1.000.G1K

CCT SETTABLE



MADE IN ITALY

LETI 100 ROUND - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

CASSA realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di lampadina led GX53.

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 100 ROUND



Dimensions and weight

Diameter: Ø 134 mm
Installation housing depth: 80 mm
Weight: 0,4 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	

Recessed lamp supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.



3W 410 lm = **40W** incandescent
SAVE 93%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LETI 100 ROUND

RECESSED LAMP



2C3.000.G1K



2C1.000.G1K




2C4.000.G1K



2C2.000.G1K





LETI 100 ROUND 2C1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-GR 2C2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-EL 2C3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-ST 2C4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12


LETI 100 SQUARE

RECESSED LAMP



Recessed wall lamp with square shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada ad incasso a muro con forma quadra, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.

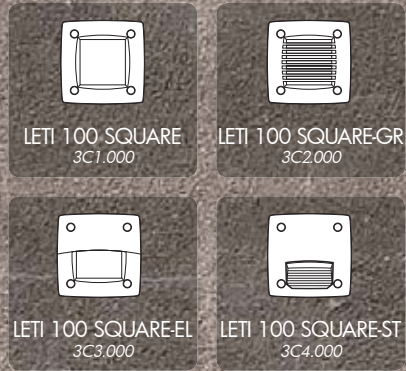

3C1.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

CE CB IECEE CB SCHEME UV UV-TREATED CLASS II DOUBLE INSULATION PUBLIC RESIDENTIAL

RECYCLABLE ANTI-SHOCK TEMPERATURE +90° -60° RECESSED



LETI 100 SQUARE - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

CASSA realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di **lampadina led GX53**.

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 100 SQUARE



Dimensions and weight

Height: 115 mm
Width: 115 mm
Installation housing depth: 80 mm
Weight: 0,4 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	



3W 410 Lm = **40W** incandescent

SAVE 93%

Recessed lamp supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

LETI 100 SQUARE

RECESSED LAMP





LETI 100 SQUARE 3C1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 SQUARE-GR 3C2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 SQUARE-EL 3C3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 SQUARE-ST 3C4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 200

RECESSED LAMP



Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada ad incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



4C4.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM < 6



LETI 200 - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

CASSA realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di lampadina led GX53.

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 200



Dimensions and weight

Height: 113 mm
Width: 188 mm
Installation housing depth: 98 mm
Weight: 0,6 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	

Recessed lamp supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.



3W
410 Lm

=


40W
 incandescent

SAVE 93%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LETI 200

RECESSED LAMP



4C1.000.G1K



4C2.000.G1K




4C3.000.G1K



4C4.000.G1K



4C5.000.G1K



LETI 200 4C1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-GL 4C2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-RS 4C3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-HS 4C4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-VP 4C5.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12


LETI 300

RECESSED LAMP



Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **2x Kelvin settable GX53 LED lamps included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada LED per incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con **include 2 lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*

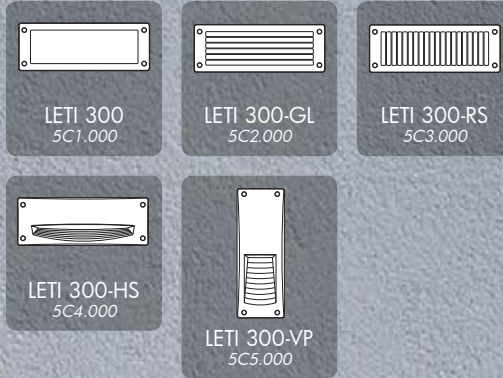

5C4.000.G2K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

CE CB IECEE CB SCHEME UV UV-TREATED CLASS II DOUBLE INSULATION PUBLIC RESIDENTIAL RECYCLABLE ANTI-SHOCK TEMPERATURE +90° -60° RECESSED



LETI 300 - COMPONENTS



IP66

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).


DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

HOUSING made of shockproof resin material, suitable for the electrical devices fixation. Provided with **2x GX53 led lamps** or with E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

CASSA realizzata in resina antiurto, adatta ad alloggiare gli accessori elettrici. Fornita completa di **2 lampadine led GX53** o di portalamпада E27 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.


INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

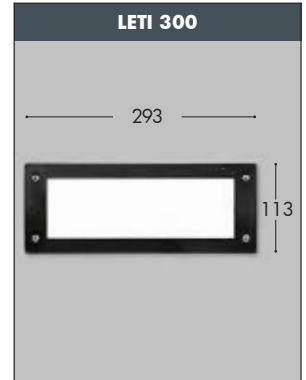

Dimensions and weight
Height: 113 mm
Width: 293 mm
Installation housing depth: 98 mm
Weight: 0,9 Kg

Moulded colours:
 Black White Grey
Diffuser PMMA:
 Opal




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.



Recessed lamp supplied complete with 2x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	2x 3W 6W	820 lm	6500 K	.G2K
			4000 K	
			3000 K	

2x 3W = 6W
820 Lm = incandescent

SAVE 93%




Recessed lamp supplied complete with E27 lampholder.

E27 (CFL -LED)	max 160 mm ↔	*ADD. SUFFIX .E27
--------------------------	-----------------	----------------------





CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LETI 300

RECESSED LAMP

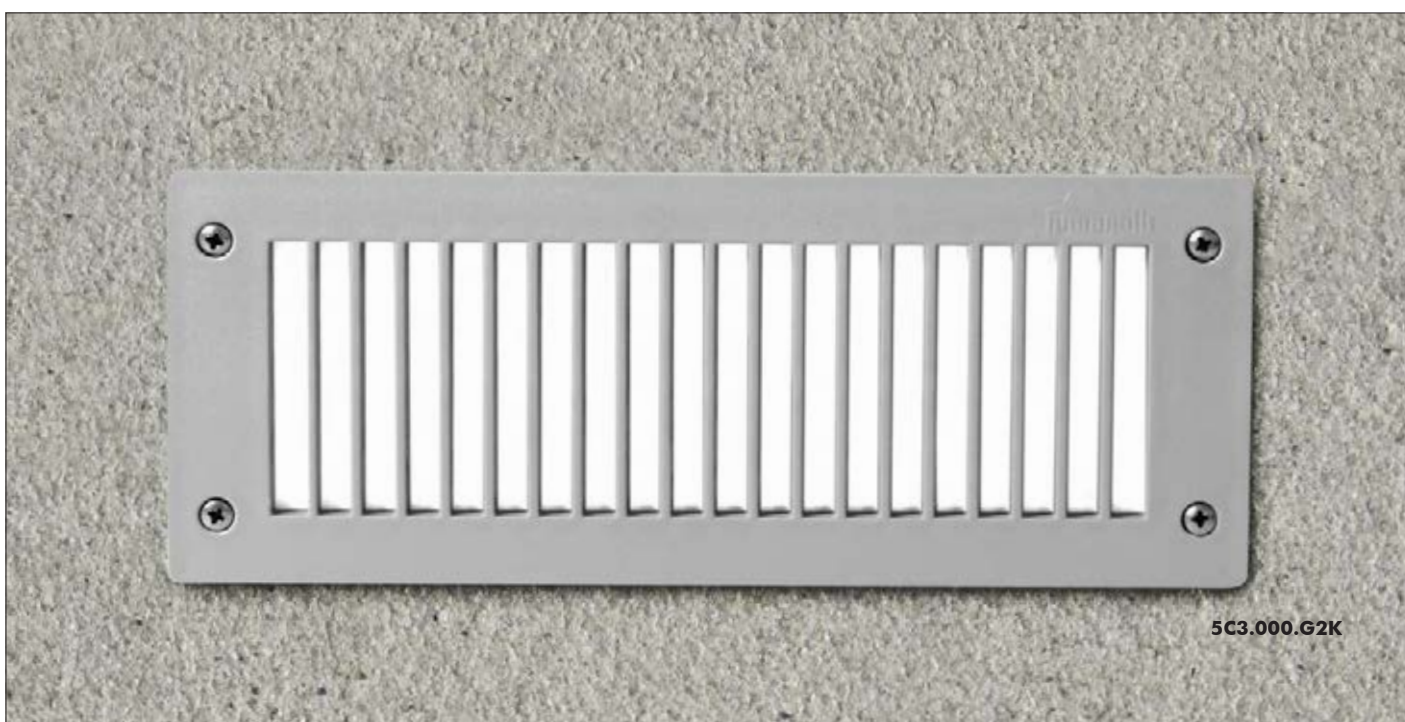

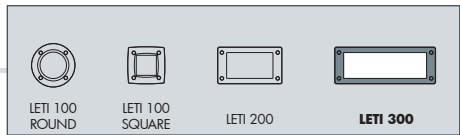

LETI 300

6W 5C1.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-GL

6W 5C2.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-RS

6W 5C3.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-HS

6W 5C4.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-VP

6W 5C5.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

EXTRALETI 100 ROUND

SURFACE LAMP



Surface wall lamp with round shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp 3W-350lm included. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma circolare, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 3W-350lm con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



• 253.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6



EXTRALETI 100 ROUND - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

***COVER** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

High quality silicone rubber **GASKET** to ensure high protection against external agents.

***GUARNIZIONE** in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

***CORPO** realizzato in resina antiurto, stabilizzata ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di lampadina led GX53.*

EXTRALETI 100 ROUND



Dimensions and weight

Diameter: Ø 140 mm
Depth: 64/85 mm
Weight: 0,5 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	

Surface lamp supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.



3W 410 Lm = **40W** incandescent
SAVE 93%

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

EXTRALETI 100 ROUND

SURFACE LAMP



MADE IN ITALY



EXTRALETI 100 ROUND

3W 2S1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 ROUND-GR

3W 2S2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 ROUND-EL

3W 2S3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 ROUND-ST

3W 2S4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE

SURFACE LAMP



Surface wall lamp with square shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma quadra, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 con kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



EXTRALETI 100
SQUARE
351.000



EXTRALETI 100
SQUARE-GR
352.000



EXTRALETI 100
SQUARE-EL
353.000



EXTRALETI 100
SQUARE-ST
354.000



354.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6



EXTRALETI 100 SQUARE - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.



Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di lampadina led GX53.



EXTRALETI 100 SQUARE



Dimensions and weight

Height: 120 mm
Width: 120 mm
Depth: 64/85 mm
Weight: 0,5 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED


100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
4000 K				
3000 K				

Surface lamp supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

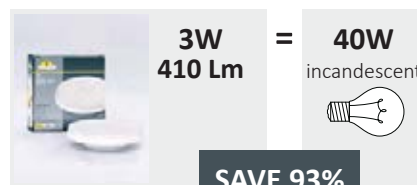

SAVE 93%

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

EXTRALETI 100 SQUARE

SURFACE LAMP





EXTRALETI 100 SQUARE

3W 3S1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE-GR

3W 3S2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE-EL

3W 3S3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE-ST

3W 3S4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 200

SURFACE LAMP



Surface wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



451.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTISHOCK	TEMPERATURE	WALL	



EXTRALETI 200 - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

***COVER** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

High quality silicone rubber **GASKET** to ensure high protection against external agents.

***GUARNIZIONE** in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

***CORPO** realizzato in resina antiurto, stabilizzata ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di lampadina led GX53.*

EXTRALETI 200



Dimensions and weight

Height: 120 mm
Width: 200 mm
Depth: 65/85 mm
Weight: 0,7 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED


100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	3 W	410 lm	6500 K 4000 K 3000 K	.G1K


Surface lamp supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

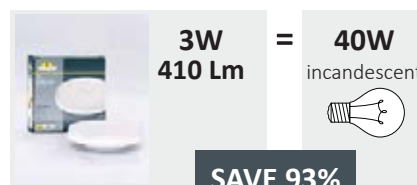

3W 410 Lm = **40W** incandescent
SAVE 93%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

EXTRALETI 200

SURFACE LAMP



MADE IN ITALY



EXTRALETI 200 4S1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-GL 4S2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-RS 4S3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-HS 4S4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-VP 4S5.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 300

SURFACE LAMP



Surface wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with 2 x TÜV-CB certified long-life, efficient and Kelvin settable GX53 LED lamps included. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con incluse 2 lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



551.000.G2K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	UV-TREATED	DOUBLE INSULATION	PUBLIC	RESIDENTIAL
ANTISHOCK	TEMPERATURE	WALL		



EXTRALETI 300 - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **2x GX53 led lamps**.

CORPO realizzato in resina antiurto, stabilizzato ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di 2 lampadine led GX53.



EXTRALETI 300

Dimensions and weight
Height: 120 mm
Width: 300 mm
Depth: 65mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V

*ADD. SUFFIX



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	2x 3W 6W	820 lm	6500 K 4000 K 3000 K	.G2K


2x 3W = 60W
820 Lm incandescent

SAVE 93%

Surface lamp supplied complete with 2 x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

EXTRALETI 300

SURFACE LAMP





EXTRALETI 300

6W 5S1.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 20
Kg 19
mc 0,14

EXTRALETI 300-GL

6W 5S2.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 20
Kg 19
mc 0,14

EXTRALETI 300-RS

6W 5S3.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 20
Kg 19
mc 0,14

EXTRALETI 300-HS

6W 5S4.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 12
Kg 11
mc 0,14

EXTRALETI 300-VP

6W 5S5.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 12
Kg 11
mc 0,14



FLOODLIGHT

MINITOMMY

FLOODLIGHT



LED floodlight with single or double lights made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Ring or eyelid cover versions available with no visible screws. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.



Proiettore a LED a luce singola o doppia fabbricato in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto, al suolo o su picchetto, sia in ambienti esterni che interni. Cover ad anello o a palpebra senza viti a vista. Fornito nella versione standard con inclusa lampadina a LED GU10 con Kelvin impostabile certificata TÜV-CB di lunga durata ed elevata efficienza. Il proiettore è completamente regolabile e si può inclinare e orientare a piacimento. Classe di isolamento II, grado di protezione IP66.



1M1.001.U1K

CCT SETTABLE

2700 K 4000 K

SDCM <3



MINITOMMY - COMPONENTS

IP 66




COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Ring or eyelid versions available.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Disponibile nella versione ad anello o a palpebra.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

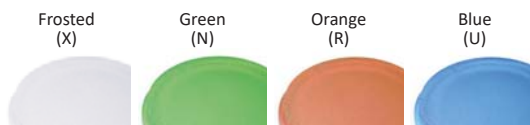

Resin **BODY** suitable for the electrical devices fixation and resin **SUPPORT FORK** to allow a fully adjustable floodlight position.

CORPO in resina predisposto per il fissaggio degli accessori elettrici e **FORCELLA** di supporto per permettere l'orientamento del proiettore.

INSTALLATION ELEMENTS:

- ROTATION DISK for surface installation.
- SPIKE for in ground installation.
- CONNECTION FITTING for double lights version.

ELEMENTI DI FISSAGGIO:

- DISCO DI ROTAZIONE per l'installazione a parete.
- PICCHETTO per l'installazione nel terreno.
- SUPPORTO per la versione a luce doppia.

MINITOMMY



Dimensions and weight

Height: 127 mm
Width: 122 mm
Weight: 0,45 Kg

Moulded Colours:

Black Grey White

Diffuser PC:

Frosted
Blue Green Orange

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GU10 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3,5W	366 Lm	4000 K	.U1K
			2700 K	
	6W	615 Lm	4000 K	.L1K
			2700 K	


Floodlight supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GU10 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W = 35W
366 Lm HALOGEN
SAVE 90%

6W = 50W
615 Lm HALOGEN
SAVE 88%

CCT SETTABLE LED LAMP




CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

MINITOMMY

FLOODLIGHT

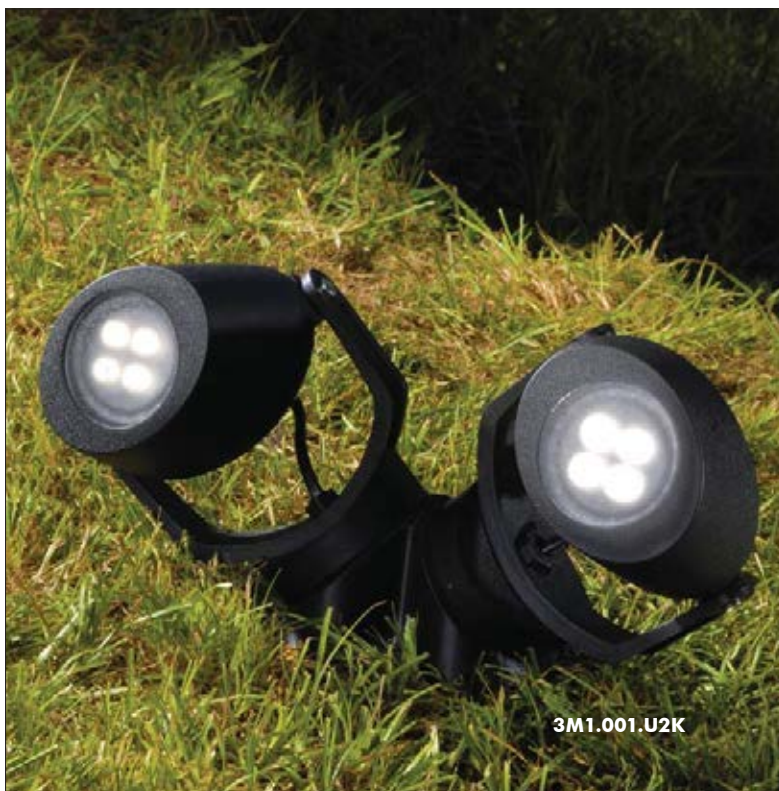

MADE IN ITALY



MINITOMMY	
3,5W	1M1.000.U1K
6W	1M1.000.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 30 Kg 12,6 mc 0,092	

MINITOMMY SPIKE	
3,5W	1M1.001.U1K
6W	1M1.001.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 30 Kg 13,8 mc 0,092	


MINITOMMY 2L	
2x3,5W	3M1.000.U2K
2x6W	3M1.000.L2K
2 CCT SETTABLE GU10 LED LAMPS INCLUDED 2700K/4000K	
Pcs 18 Kg 16,2 mc 0,092	

MINITOMMY 2L SPIKE	
2x3,5W	3M1.001.U2K
2x6W	3M1.001.L2K
2 CCT SETTABLE GU10 LED LAMPS INCLUDED 2700K/4000K	
Pcs 18 Kg 17 mc 0,092	

MINITOMMY-EL

FLOODLIGHT





MINITOMMY-EL

3,5W	1M2.000.U1K
6W	1M2.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 12,6
mc 0,092

MINITOMMY-EL SPIKE

3,5W	1M2.001.U1K
6W	1M2.001.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
273000K/4000K

Pcs 30
Kg 13,8
mc 0,092

MINITOMMY-EL 2L

2x3,5W	3M2.000.U2K
2x6W	3M2.000.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

Pcs 18
Kg 16,2
mc 0,092

MINITOMMY-EL 2L SPIKE

2x3,5W	3M2.001.U2K
2x6W	3M2.001.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

Pcs 18
Kg 17
mc 0,092

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES


TOMMY

FLOODLIGHT



LED floodlight with single or double lights made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Square, ring or eyelid cover versions available with no visible screws. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.

Proiettore a LED a luce singola o doppia fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto, al suolo o su picchetto, sia in ambienti esterni che interni. Cover quadrata, ad anello o a palpebra senza viti a vista. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB di lunga durata ed elevata efficienza. Il proiettore è completamente regolabile e si può inclinare e orientare a piacimento. Classe di isolamento II, grado di protezione IP66.



2M1.001.D1K




CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

MADE IN ITALY



TOMMY - COMPONENTS

IP 66




COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Ring or eyelid versions available.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Disponibile nella versione ad anello o a palpebra.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

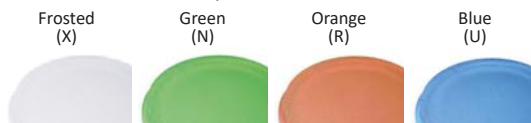

Resin **BODY** suitable for the electrical devices fixation and resin **SUPPORT FORK** to allow a fully adjustable floodlight position.

CORPO in resina predisposto per il fissaggio degli accessori elettrici e **FORCELLA** di supporto per permettere l'orientamento del proiettore.

INSTALLATION ELEMENTS:

- ROTATION DISK for surface installation.
- SPIKE for in ground installation.
- CONNECTION FITTING for double lights version.

ELEMENTI DI FISSAGGIO:

- DISCO DI ROTAZIONE per l'installazione a parete.
- PICCHETTO per l'installazione nel terreno.
- SUPPORTO per la versione a luce doppia.

TOMMY



Dimensions and weight

Height: 165 mm
Width: 152 mm
Weight: 0,8 Kg

Moulded Colours:

Black Grey White

Diffuser PC:

Frosted
Blue Green Orange

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
GX53 LED	10 W	1290 Lm	6500 K	.D1K
			4000 K	
			3000 K	

Floodlight supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3W = **40W**
410 Lm = incandescent
SAVE 93%

10W = **100W**
1290 Lm = incandescent
SAVE 90%

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TOMMY
FLOODLIGHT





TOMMY

3W	2M1.000.G1K
10W	2M1.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 15,3
mc 0,092

TOMMY SPIKE

3W	2M1.001.G1K
10W	2M1.001.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 16
mc 0,092

TOMMY 2L

2x3W	4M1.000.G2K
2x10W	4M1.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

Pcs 8
Kg 13,9
mc 0,092

TOMMY 2L SPIKE

2x3W	4M1.001.G2K
2x10W	4M1.001.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

Pcs 8
Kg 14,2
mc 0,092

TOMMY-EL
FLOODLIGHT




2M2.001.D1K



4M2.001.D2K





TOMMY-EL

3W	2M2.000.G1K
10W	2M2.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 15,3
mc 0,092

TOMMY-EL SPIKE

3W	2M2.001.G1K
10W	2M2.001.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 16
mc 0,092

TOMMY-EL 2L

2x3W	4M2.000.G2K
2x10W	4M2.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

Pcs 8
Kg 13,9
mc 0,092

TOMMY-EL 2L SPIKE

2x3W	4M2.001.G2K
2x10W	4M2.001.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K


Pcs 8
Kg 14,2
mc 0,092

TOMMY-SQ

FLOODLIGHT



MADE IN ITALY



TOMMY-SQ

3W	5M1.000.G1K
10W	5M1.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 15,3
mc 0,092

TOMMY-SQ SPIKE

3W	5M1.001.G1K
10W	5M1.001.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 16
mc 0,092

TOMMY-SQ 2L

2x3W	6M1.000.G2K
2x10W	6M1.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

Pcs 8
Kg 13,9
mc 0,092

TOMMY-SQ 2L SPIKE

2x3W	6M1.001.G2K
2x10W	6M1.001.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

Pcs 8
Kg 14,2
mc 0,092

GIOVA/GERMANA

FLOODLIGHT

Rectangular floodlight with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ground installation. Provided complete with a fully adjustable bracket to direct the light emission. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with **E27** lampholder. Motion sensor version available. Insulation class II, Protection rating IP66.



GIOVA/GERMANA
2N1.702

Proiettore rettangolare senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete e al suolo. Fornito completo di braccio che permette l'orientamento del proiettore in qualsiasi posizione. Provvisto di lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.




2N1.702.D2K

CCT SETTABLE

SDCM < 6

3000 K 4000 K 6500 K





GIOVA/GERMANA - COMPONENTS

IP66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.


COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



BRACKET made of shockproof resin material, UV-rays stabilized, to allow a fully adjustable position of the floodlight.

BRACCIO realizzato in resina antiurto, stabilizzato ai raggi UV, che permette l'orientamento in qualsiasi posizione del proiettore.

GIOVA/GERMANA



Dimensions and weight

Height: 280 mm
Width: 180 mm
Weight: 1,6 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

2x GX53 LED

E27



Floodlight supplied **fully pre-wired** complete with 2x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

Floodlight supplied **fully pre-wired** with white resin reflective ceiling designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side. *Daylight and motion sensor* available as an option. Sensor operating voltage: 220-240V (120V available on demand).

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	2x 3W 6W	820 lm	6500 K	.G2K
			4000 K	
			3000 K	
	2x 10W 20W	2580 lm	6500 K	.D2K
			4000 K	
			3000 K	


E27 (CFL -LED)	max 160 mm	.P27
E27 + Sensor (CFL -LED)	max 160 mm	.PS7

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.


2x 10W = 50W
2.580 Lm SON-HQI

SAVE 60%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE



MADE IN ITALY






GIOVA/GERMANA GX53

6W 2N1.702.G2K

20W 2N1.702.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

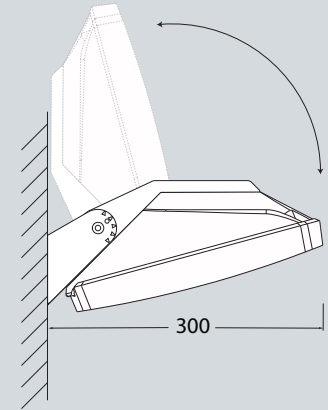




Pcs 18
Kg 29,8
mc 0,198

GIOVA/GERMANA E27

E27 lampholder 2N1.702.P27

E27 with sensor 2N1.702.PS7

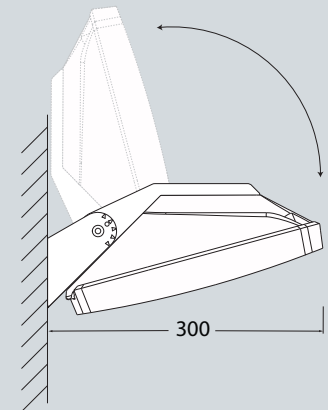

Pcs 18
Kg 21,7
mc 0,198

GERMANA

FLOODLIGHT

Rectangular floodlight with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and post installation. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with **E27 lampholder**. Motion sensor version available. Insulation class II, Protection rating IP66.



Proiettore rettangolare senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete e a palo. Provvisto di lampadine a LED GX53 con kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o fornito nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.




2N1.000.D2K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





GERMANA - COMPONENTS

IP66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV.

DIFFUSER made of UV-rays stabilized polymethyl-methacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

GERMANA



Dimensions and weight

Height: 280 mm
Width: 180 mm
Weight: 1,4 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

2x GX53 LED



Floodlight supplied **fully pre-wired** complete with 2x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	2x 3W 6W	820 lm	6500 K	.G2K
			4000 K	
			3000 K	
	2x 10W 20W	2580 lm	6500 K	.D2K
			4000 K	
			3000 K	

2x 10W = 50W
2.580 Lm SON-HQI

SAVE 60%

E27




Floodlight supplied **fully pre-wired** with white resin reflective ceiling designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


E27 (CFL -LED)	max 160 mm	.P27
E27 + Sensor (CFL -LED)	max 160 mm	.PS7

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE







GERMANA GX53

6W 2N1.000.G2K

20W 2N1.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K





Pcs 18
Kg 26,2
mc 0,198

GERMANA E27

E27 lampholder 2N1.000.P27

E27 with sensor 2N1.000.PS7



Pcs 18
Kg 18,1
mc 0,198

BOLLARD VERSION



Detailed information on page 234.

GIOVA/GIUSEPPE

FLOODLIGHT



Square floodlight with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall, ground and post installation. Provided complete with a fully adjustable bracket to direct the light emission. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with **2x E27 lampholders**. Motion sensor version available. Insulation class II, Protection rating IP66.



GIOVA/GIUSEPPE
4P1.702
4P2.702

*Proiettore quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a suolo e a palo. Provvisto completo di braccio che permette l'orientamento del proiettore in qualsiasi posizione. Fornito con **include lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione **2x E27**, anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.*

4P1.702.B1K



CCT SETTABLE

2700 K 3000 K 4000 K 6500 K

SDCM <6





GIOVA/GIUSEPPE - COMPONENTS



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.


COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV.

DIFFUSER made of UV-rays stabilized polymethyl-methacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



BRACKET made of shockproof resin material, UV-rays stabilized, to allow a fully adjustable position of the floodlight.

BRACCIO realizzato in resina antiurto, stabilizzato ai raggi UV, che permette l'orientamento in qualsiasi posizione del proiettore.

GIUSEPPE



Dimensions and weight

Height: 150 mm
Width: 300 mm
Weight: 2,8 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

LED LAMPS



LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.


4x GX53 LED



4P2.702

Floodlight supplied with white resin reflective ceiling fully pre-wired and complete with 4 x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	4x 10W 40W	5160 lm	6500 K 4000 K 3000 K	.D4K

4x 10W = 100W
5160 Lm SON-HQI




SAVE 60%

CCT SETTABLE

2700 K 3000 K 4000 K 6500 K

SDCM <6












GX53 LED



4P1.702

Floodlight supplied fully pre-wired and complete with TÜV approved, long-life, efficient and Kelvin settable GX53 LED lamp in different wattages.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	7,2 W	920 lm	6500 K 4000 K 2700 K	.A1K
 GX53 LED	11,3 W	1510 lm	6500 K 4000 K 2700 K	.B1K
 GX53 LED	17 W	2350 lm	6500 K 4000 K 2700 K	.E1K
  GX53 LED	7,2 W + SENSOR	920 lm	6500 K 4000 K 2700 K	.ASK
  GX53 LED	11,3 W + SENSOR	1510 lm	6500 K 4000 K 2700 K	.BSK
  GX53 LED	17 W + SENSOR	2350 lm	6500 K 4000 K 2700 K	.ESK

7,2W 11,3W 17W = 60W 100W 150W
incandescent



SAVE 88%



2x E27



4P2.702

Floodlight supplied fully pre-wired with white resin reflective ceiling and complete with 2x E27 lampholders.


Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 2x E27 (CFL-LED)	2x E27	max 160 mm	6500 K 4000 K 2700 K	.E28
 2x E27 + SENSOR	2x E27 + SENSOR	max 160 mm	6500 K 4000 K 2700 K	.ES8

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE






MADE IN ITALY



GIOVA/GIUSEPPE GX53

7,2W	4P1.702.A1K
11,3W	4P1.702.B1K
17W	4P1.702.E1K
40W	4P2.702.D4K




CCT SETTABLE GX53 LED LAMPS INCLUDED

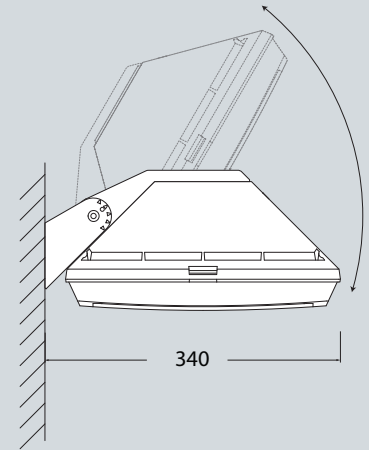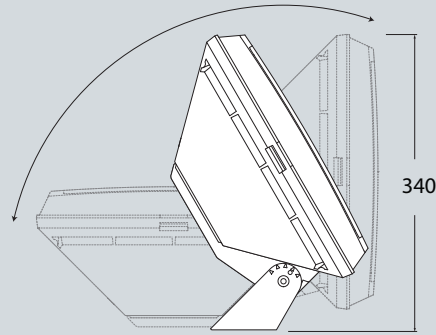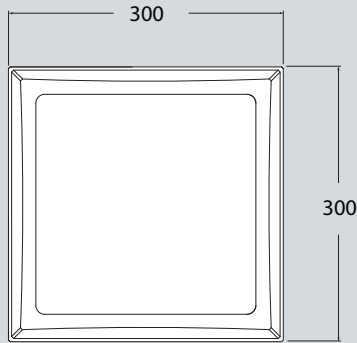

Pcs 10
Kg 31
mc 0,195

GIOVA/GIUSEPPE 2xE27

2xE27 lampholder	4P2.702.E28
2xE27 with sensor	4P2.702.ES8

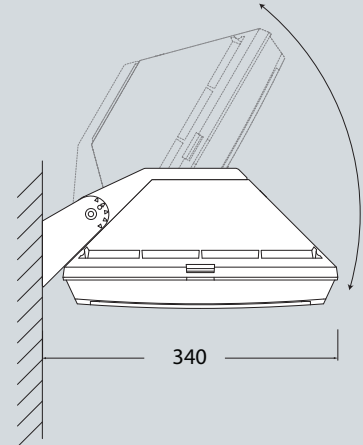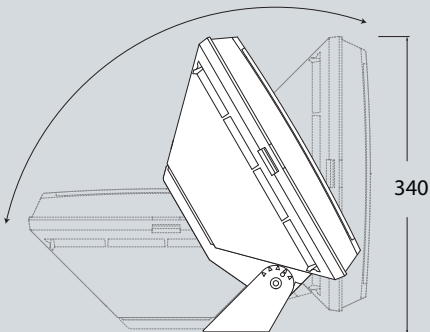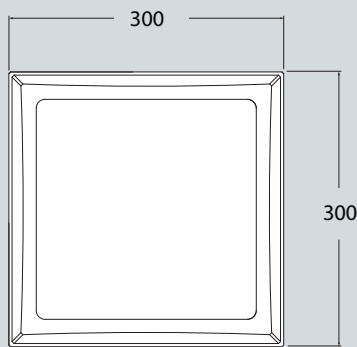

Pcs 10
Kg 21
mc 0,195

POST SYSTEM VERSION



Detailed information on page 466.

GIUSEPPE

FLOODLIGHT



Square floodlight with no visible screws made of shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for wall, ceiling and post installation. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included or provided with 2x E27 lampholders. Motion sensor version available. Insulation class II, Protection rating IP66.



Proiettore quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto e a palo. Fornito con include lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione 2x E27, anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.




4P2.000.D4K

CCT SETTABLE

2700 K 3000 K 4000 K 6500 K

SDCM <6

MADE IN ITALY



GIUSEPPE - COMPONENTS

IP 66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV.

DIFFUSER made of UV-rays stabilized polymethyl-methacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

GIUSEPPE



Dimensions and weight

Height: 150 mm
Width: 300 mm
Weight: 2,8 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

LED LAMPS



LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

4x GX53 LED

FULLY PRE-WIRED




4P2.000

Floodlight supplied with white resin reflective ceiling fully pre-wired and complete with 4 x TÜV-CB certified long-life efficient and Kelvin settable GX53 LED lamps included. Quick and easy lamp replacement for a very simple maintenance after installation.


100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	4x 10W 40W	5160 lm	6500 K 4000 K 3000 K	.D4K



4x 10W = 100W
5160 Lm SON-HQI

SAVE 60%



GX53 LED

FULLY PRE-WIRED



4P1.000

Floodlight supplied fully pre-wired and complete with TÜV approved, long-life, efficient and Kelvin settable GX53 LED lamp in different wattages.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
	17 W	2350 lm	6500 K	.E1K
			4000 K	
			2700 K	
	7,2 W + SENSOR	920 lm	6500 K	.ASK
			4000 K	
			2700 K	
	11,3 W + SENSOR	1510 lm	6500 K	.BSK
			4000 K	
			2700 K	
	17 W + SENSOR	2350 lm	6500 K	.ESK
			4000 K	
			2700 K	



7,2W = 60W
11,3W = 100W
17W = 150W
incandescent

SAVE 88%

2x E27

FULLY PRE-WIRED



4P2.000

Floodlight supplied fully pre-wired with white resin reflective ceiling and complete with 2x E27 lampholders.

Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	2x E27 (CFL-LED)	max 160 mm	6500 K 4000 K 2700 K	.E28
	2x E27 + SENSOR	max 160 mm	6500 K 4000 K 2700 K	.ES8


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GIUSEPPE

FLOODLIGHT






MADE IN ITALY



GIUSEPPE GX53

7,2W	4P1.000.A1K
11,3W	4P1.000.B1K
17W	4P1.000.E1K
40W	4P2.000.D4K




CCT SETTABLE GX53 LED LAMPS INCLUDED

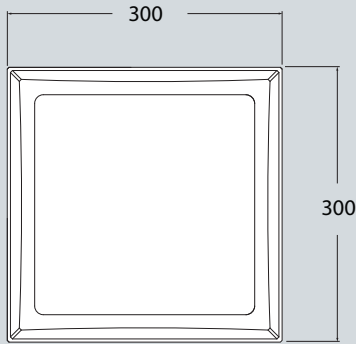

Pcs 10
Kg 29
mc 0,195

GIUSEPPE 2xE27

2xE27 lampholder	4P2.000.E28
2xE27 with sensor	4P2.000.ES8

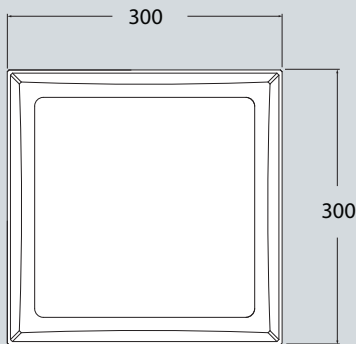

Pcs 10
Kg 19
mc 0,195

BOLLARD VERSION



Detailed information on page 234.

REFERENCES	LAMPS	POST	URBAN MODERN	URBAN CLASSIC	GARDEN	BULKHEAD	BOILLARD	FLOODLIGHT	BRICKLIGHT	IN-GROUND	DOWNLIGHT	UP&DOWN	SOLAR	COMPANY
------------	-------	------	--------------	---------------	--------	----------	----------	------------	------------	-----------	-----------	---------	-------	---------



BOLLARD

STEVEN

BOLLARD



LED bollard with modern design and directed light emission, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Dual use: suitable both for spike and ground installation. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP67.

Bollard a led in stile moderno con emissione della luce direzionata, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Doppia modalità di installazione al suolo, con picchetto o tasselli. Fornito con inclusa lampadina a LED G9, certificata TUV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



ST1.531.Z1R



STEVEN - COMPONENTS

IP67




HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

CASSA realizzata in resina antiurto. Provvista di portalamпада G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma silconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

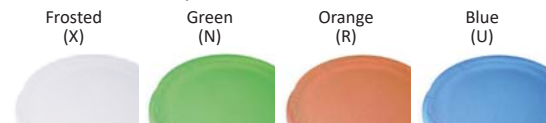

COVER with no visible screws made in shockproof resin material.

COVER senza viti a vista realizzata in resina antiurto.

POLE in one piece only complete with spike. Made in shockproof resin material, UV rays stabilized, rust and corrosion free. Dual use: you can fix the spike outside the pole for in-ground installation, or inside the pole for surface installation with screws.

PALO in un unico pezzo completo di picchetto. Fabbricato in resina antiurto stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Duplice utilizzo: il picchetto può essere montato all'esterno del palo per installazione diretta nel terreno o al suo interno per installazione al suolo mediante tasselli di fissaggio.

GROUND
INSTALLATION

SPIKE
INSTALLATION



STEVEN



Dimensions and weight

Diameter: 50 mm
Height: 450 mm
Weight: 0,65 Kg

Cover colours:



Diffuser PC:



G9 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	1,7 W	150 lm	4000 K	.Z1L
			3000 K	.Z1R

Bollard supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **100-240V:** wide voltage range to protect the driver from power surges.

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

STEVEN
BOLLARD





STEVEN		
ST1.531.Z1L	1,7W	ST1.531.Z1R
4000K	G9 LED LAMP INCLUDED	3000K
<p>Pcs 10 Kg 8,5 mc 0,092</p>		

Architectural LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square bollards in different sizes, spike and wall mounted versions available. Supplied with stepped shape reflector and with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Insulation class II, Protection rating IP55.

*Collezione di lampade architettoniche a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard quadro in diverse altezze, con picchetto o a parete. Provvista di riflettore a scaletta piramidale e fornita con **incluse lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.***



DS1.564.D1K


CCT SETTABLE



3000 K 4000 K 6500 K

SDCM < 6





ESTER COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER in clear colour made of UV-rays stabilized polymethylmethacrilate (PMMA).

DIFFUSORE trasparente realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV.

REFLECTOR with stepped shape spreading the lighting output to emphasize the shape of the product. Made of shockproof resin material.

RIFLETTORE a scaletta piramidale che consente al fascio di luce di enfatizzare la sagoma del prodotto. Realizzato in resina antiurto.



INSTALLATION ELEMENTS:

- POLES for bollard versions
- BASE for wall and surface installation
- SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:

- STELI per versione bollard
- BASE per installazione a parete e al suolo
- PICCHETTO per istallazione nel terreno



ESTER

Dimensions

Height: 165/500/800 mm
Width: 126 mm
Depth: 126 mm

Moulded colours:

- Black
- White
- Grey

Diffuser PMMA:

- Clear

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V




LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	

Bollard supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available.



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** easy to upgrade.
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



ESTER 800 clear GX53 10W.

Bollard height 0,8 mt
Area: 6x6 mt - average 15 lux


The photometric data for all the versions are available upon request or on our website.

3W 410 Lm = 40W incandescent
SAVE 93%

10W 1290 Lm = 100W incandescent
SAVE 90%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE





ESTER 800

3W	DS1.564.G1K
10W	DS1.564.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 6
Kg 16
mc 0,145

ESTER 500

3W	DS1.563.G1K
10W	DS1.563.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 12
Kg 24
mc 0,145

ESTER WALL

3W	DS1.560.G1K
10W	DS1.560.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 22
mc 0,092

ESTER SPIKE

3W	DS1.561.G1K
10W	DS1.561.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 23
mc 0,092

ELISA

SQUARE BOLLARD



Architectural LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square bollards in different sizes, spike and wall mounted versions available. Supplied with white square reflector and with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Insulation class II, Protection rating IP55.

Collezione di lampade architettoniche a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard in diverse altezze, con picchetto o a parete. Provvista di riflettore quadro in colore bianco e fornita con include lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




DS2.564.D1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





ELISA COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER in clear colour made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE trasparente realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV.

REFLECTOR with square shape spreading the lighting output to create a four beams luminous effect. Made of shockproof white reflective resin material.

RIFLETTORE quadro che diffonde la luce dividendola in quattro fasci. Realizzato in resina antiurto di colore bianco.



INSTALLATION ELEMENTS:

- POLES for bollard versions
- BASE for wall and surface installation
- SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:

- STELI per versione bollard
- BASE per installazione a parete e al suolo
- PICCHETTO per installazione nel terreno

ELISA



Dimensions

Height: 165/500/800 mm
Width: 126 mm
Depth: 126 mm

Moulded colours:

- Black
- White
- Grey

Diffuser PMMA:

- Clear

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V




LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** easy to upgrade.
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.


Bollard supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

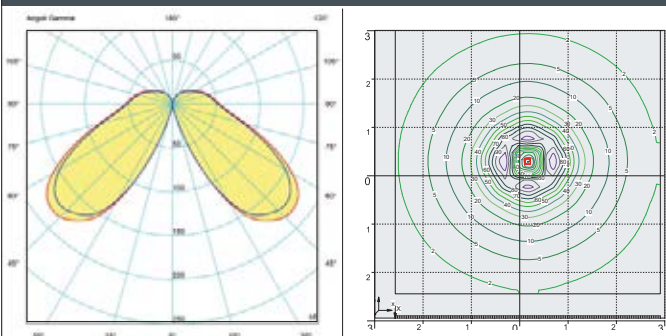

ELISA 800 clear GX53 10W.

Bollard height 0,8 mt
Area: 6x6 mt - average 13 lux

The photometric data for all the versions are available upon request or on our website.

3W 410 Lm = 40W incandescent
SAVE 93%


10W 1290 Lm = 100W incandescent
SAVE 90%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ELISA

SQUARE BOLLARD





ELISA 800	
3W	DS2.564.G1K
10W	DS2.564.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 6 Kg 16 mc 0,145	

ELISA 500	
3W	DS2.563.G1K
10W	DS2.563.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 12 Kg 24 mc 0,145	

ELISA WALL	
3W	DS2.560.G1K
10W	DS2.560.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 18 Kg 22 mc 0,092	

ELISA SPIKE	
3W	DS2.561.G1K
10W	DS2.561.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 18 Kg 23 mc 0,092	

CARLO - CARLO DECO

ROUND BOLLARD



LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round bollards in different sizes, spike and wall mounted versions available. Provided with double PMMA diffusers and ornamental screen on deco version. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Insulation class II, protection rating IP55.

Collezione di lampade a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard in diverse altezze, con picchetto o a parete. Lampada provvista di un doppio diffusore in metacrilato e di schermo ornamentale nella versione deco. Fornita con inclusa lampadina a LED GU10 con Kelvin impostabile, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

CARLO DECO VERSION on page 210




DR1.575.L1K

CCT SETTABLE

2700 K 4000 K

SDCM <3





CARLO COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

OUTER DIFFUSER in clear colour made of UV-rays stabilized polymethylmethacrilate (PMMA) provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE ESTERNO in colore trasparente realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV. Fornito completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

ORNAMENTAL SCREEN (DECO version only) made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

SCHERMO ORNAMENTALE (solo sulla versione DECO) realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

CONNECTION RING made of shockproof resin material, provided with GU10 lampholder.

GHIERA di raccordo realizzata in resina antiurto fornita completa di portalamпада GU10.

INSTALLATION ELEMENTS:
-POLES for bollard versions
-BRACKETS for wall mounted versions
-SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:
-STELI per versione bollard
-SUPPORTI per installazione a parete
-PICCHETTO per istallazione nel terreno

CARLO

— Ø100 —



Dimensions

Diameter: Ø100mm
Height: 250/400/800 mm

Moulded colours:

Black White
 Grey

Outer Diffuser PMMA:

Clear

Inner Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GU10 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3,5W	366 lm	4000 K	.U1K
GU10 LED			2700 K	
	6W	615 lm	4000 K	.L1K
GU10 LED			2700 K	

Bollard supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GU10 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.


3.5W = 35W HALOGEN
366 Lm

SAVE 90%

6W = 50W HALOGEN
615 Lm

SAVE 88%


CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE





CARLO 800

3,5W DR1.575.U1K
6W DR1.575.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 6
Kg 15
mc 0,147

CARLO 400

3,5W DR1.574.U1K
6W DR1.574.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 12
Kg 22,5
mc 0,147

CARLO 250

3,5W DR1.573.U1K
6W DR1.573.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

CARLO-FS

3,5W DR1.571.U1K
6W DR1.571.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

CARLO WALL

3,5W DR1.570.U1K
6W DR1.570.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

CARLO SPIKE

3,5W DR1.572.U1K
6W DR1.572.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

CARLO DECO

ROUND BOLLARD



DR3.570.L1K



DR3.571.L1K



DR3.573.U1K




DR3.575.L1K



DR3.574.L1K

MADE IN ITALY



CARLO 800 DECO

3,5W DR3.575.U1K

6W DR3.575.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 6
Kg 15
mc 0,147

CARLO 400 DECO

3,5W DR3.574.U1K

6W DR3.574.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 12
Kg 22,5
mc 0,147

CARLO 250 DECO

3,5W DR3.573.U1K

6W DR3.573.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

CARLO-FS DECO

3,5W DR3.571.U1K

6W DR3.571.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

CARLO WALL DECO

3,5W DR3.570.U1K

6W DR3.570.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

CARLO SPIKE DECO

3,5W DR3.572.U1K

6W DR3.572.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

AMELIA

ROUND BOLLARD



LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round bollards in different sizes, spike and wall mounted versions available. Provided with opal PMMA diffuser to get a uniform light distribution. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable E27 LED lamp included**. Insulation class II, protection rating IP55.

Collezione di lampade a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard in diverse altezze, con picchetto o a parete. Lampada provvista di diffusore in metacrilato opale che garantisce un'uniforme distribuzione della luce. Fornita con inclusa lampadina LED E27 con Kelvin impostabile, certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




DR2.575.T1K

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6





AMELIA COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER in opal colour to get a uniform light distribution. Made of UV-rays stabilized polymethylmethacrilate (PMMA) and provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE in colore opale per garantire un'uniforme distribuzione della luce. Realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

CONNECTION RING made of shockproof resin material, provided with E27 lampholder.

GHIERA di raccordo realizzata in resina antiurto fornita completa di portalamпада E27.

INSTALLATION ELEMENTS:

- POLES for bollard versions
- BRACKETS for wall mounted
- SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:

- STELI per versione bollard
- SUPPORTI per installazione a parete
- PICCHETTO per istallazione nel terreno

AMELIA

— Ø100 —



Dimensions

Diameter: Ø100mm
Height: 250/400/800 mm

Moulded colours:

- Black
- White
- Grey

Diffuser PMMA:

- Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

E27 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	8,5 W	920 lm	6500 K	.V1K
			4000 K	
			2700 K	
	11W	1200 lm	6500 K	.T1K
			4000 K	
			2700 K	


Bollard supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable E27 LED lamp included. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long life and efficient LED light sources.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **100-240V:** to protect the driver from power surges.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to the latest technology developments.
- **HIGH EFFICIENCY:** > 85% energy saving.

8,5W 11W = 60W 75W
incandescent

SAVE 85%

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

AMELIA

ROUND BOLLARD





AMELIA 800

8,5W DR2.575.V1K
11W DR2.575.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 6
Kg 15
mc 0,147

AMELIA 400

8,5W DR2.574.V1K
11W DR2.574.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 12
Kg 22,5
mc 0,147

AMELIA 250

8,5W DR2.573.V1K
11W DR2.573.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 20
Kg 21
mc 0,121

AMELIA-FS

8,5W DR2.571.V1K
11W DR2.571.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 20
Kg 21
mc 0,121

AMELIA WALL

8,5W DR2.570.V1K
11W DR2.570.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 20
Kg 21
mc 0,121

AMELIA SPIKE

8,5W DR2.572.V1K
11W DR2.572.T1K

CCT SETTABLE E27 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 20
Kg 21
mc 0,121

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SAURO LED

ROUND BOLLARD - CLASSIC



Bollard range in classic style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Uniform light distribution for a safer and more enjoyable night atmosphere. Insulation class II, protection rating IP55.

Gamma di bollard in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Uniforme distribuzione della luce per un'atmosfera notturna sicura e gradevole. Classe di isolamento II, grado di protezione IP55.



D15.555.D1KCRB

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6



SAURO LED COMPONENTS

IP55



CAP made of shockproof resin material, locked to the diffuser and equipped with GX53 led lamp. To be removed for relamping by the supplied hexagonal key for locking screws.

CALOTTA fissata al diffusore, realizzata in resina antiurto e completa di lampadina led GX53. Rimovibile tramite vite di sicurezza per permettere il cambio della lampadina.

DISK made of UV-rays stabilized PMMA to spread the light and to get a lower dazzle.

DISCO in polimetilmetacrilato (PMMA) per diffondere la luce e ridurre l'abbagliamento.

DIFFUSER of UV stabilized polymethylmethacrylate (PMMA) available in clear or opal colour.

DIFFUSORE in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, disponibile in colore trasparente o opale.

White **REFLECTOR** with conical shape made of shockproof resin material.

RIFLETTORE bianco a forma conica, realizzato in resina antiurto.

CONNECTION RING made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.


GHIERA di raccordo realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SAURO LED



Dimensions
Diameter: Ø150 mm
Height: 500/800/1100 mm

Moulded colours:



Painted colours:



Diffuser PMMA:



LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V




LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	10 W	1290 lm	6500 K 4000 K 3000 K	.D1K

Bollard supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Quick and easy lamp replacement for a very simple maintenance after installation.



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



SAURO 1100 GX53 LED-clear 10W.

Sauro height 1,1 mt
Area: 6x6 mt - average 11 lux

The photometric data for all the versions are available upon request or on our website.

10W = 100W
1290 Lm incandescent

SAVE 90%

SAURO LED

ROUND BOLLARD - CLASSIC



D15.554.D1KCRB




D15.553.D1KCRB



D15.505.D1KCRB

MADE IN ITALY



SAURO 1100 LED D15.555.D1KCRB
10W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 1
Kg 4,2
mc 0,068

SAURO 800 LED D15.554.D1KCRB
10W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 1
Kg 3,4
mc 0,05

MIRELLA LED D15.505.D1KCRB
10W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 1
Kg 2,7
mc 0,032

SAURO 500 LED D15.553.D1KCRB
10W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 1
Kg 2
mc 0,032

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SAURO E27

ROUND BOLLARD - CLASSIC




Bollard range in classic style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Gamma di bollard in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornito con portalampana E27 e predisposto per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.

D15.554.FC1







SAURO E27 COMPONENTS



CAP locked to the diffuser and made of shockproof resin material. To be removed for relamping by the supplied hexagonal key for locking screws.

CALOTTA fissata al diffusore e realizzata in resina antiurto. Rimovibile tramite vite di sicurezza per permettere il cambio della lampadina.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), available in clear or opal colour.

DIFFUSORE in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, disponibile in colore trasparente o opale.

LOUVRE (Optional) with a laminar symmetrical optic system, to direct the lighting output and to get a lower dazzle. Available in white resin material or in chrome aluminium. Recommended use with clear diffuser bollard.

FRANGILUCE (Optional) con sistema ottico lamellare a ripartizione simmetrica, per orientare il fascio di luce e ridurre l'abbagliamento, disponibile nella versione in resina bianca o in alluminio cromato (utilizzo raccomandato con diffusore trasparente).

CLOSED RING
White Resin
(H.FRA.D15)

CLOSED RING
Aluminium Chrome
(H.FC1)



CONNECTION RING provided with E27 lampholder seat in its upper side.

GHIERA di raccordo nella cui parte superiore si trova l'alloggiamento del portalampada E27.



Dimensions
Diameter: Ø150 mm
Height: 500/800/1100 mm

Moulded colours:

- Black
- White
- Grey (except Nardo)

Painted colours:

- Antique green
- Antique bronze

Diffuser PMMA:

- Clear
- Opal

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX





suitable lamps: CFL-LED max 190 mm ↔ max 23W		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5 W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500K	.V1K
			4000 K	
CCT SET LED E27	11 W	1200 lm	6500 K	.T1K
			4000 K	
			2700 K	

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

PHOTOMETRIC DATA SAMPLE



SAURO1100 E27 CCT SET-opal 11W.

Sauro height 1,1mt
Area: 6x6 mt - average 8,5 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SAURO E27

ROUND BOLLARD - CLASSIC



D15.555.FC1




D15.505.FRA



D15.554.FC1

MADE IN ITALY

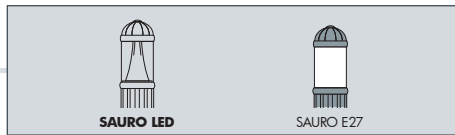

SAURO 1100
D15.555

Pcs 1
Kg 4
mc 0,068

SAURO 800
D15.554

Pcs 1
Kg 3,2
mc 0,05

MIRELLA
D15.505

Pcs 1
Kg 2,5
mc 0,037

SAURO 500
D15.553

Pcs 1
Kg 1,8
mc 0,032

Bollard range in modern style, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Poles stabilized, rust and corrosion-free. Poles available in two different sizes. Modular system for single or double luminaries installation. To be combined with LUCIA and MADDI bulkhead range (pag. 278 - 282). Insulation class II, protection rating IP66.

Gamma di bollard in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Palo disponibile in due diverse misure. Sistema modulare per permettere l'installazione singola o doppia dei corpi illuminanti. Da combinarsi con la gamma di plafoniere LUCIA e MADDI (pag. 278 - 282). Classe di isolamento II, grado di protezione IP66.

1R3.613.X10



CCT SETTABLE




2700 K

4000 K

6500 K

SDCM <6





POLES



POST made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Moulded colours in paste, no maintenance or painting required. Post and base are made of one piece only without joints to withstand the most strong stress. Provided with screws for ground fixation.

PALO realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Palo e basamento sono fabbricati in un unico pezzo senza giunzioni per resistere alle più forti sollecitazioni. Provvisto di viti per il fissaggio a terra.

GABRI POST



Dimensions
Height: 800 mm
Width: 240 mm
Depth: 240 mm

MINIGABRI POST



Dimensions
Height: 500 mm
Width: 240 mm
Depth: 240 mm

LUMINARIES INSTALLATION



IP 66

MODULAR SYSTEM for single or double luminaries installation. LUCIA and MADDI bulkheads can be fixed straight on the post or angled at 35° by adding the REMI bracket.

SISTEMA MODULARE per permettere l'installazione singola o doppia dei corpi illuminanti. Le plafoniere LUCIA e MADDI possono essere fissate direttamente a palo o angolate a 35° aggiungendo il braccio REMI.

Moulded colours:

Black White

Grey

Diffuser PMMA:

Opal

LED LAMPS



LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

SUITABLE BULKHEADS FOR POST INSTALLATION

BULKHEAD				See page 278 for full details about LUCIA bulkhead. Informazioni complete sulla plafoniera LUCIA a pag.278.
	LUCIA 1R3.000	LUCIA-EL 2R3.000	LUCIA-GD 3R3.000	

BULKHEAD				See page 282 for full details about MADDI range. Informazioni complete sulla plafoniera MADDI a pag.282.
	MADDI 1V3.000	MADDI-VE 2V3.000	MADDI-HL 3V3.000	

AVAILABLE LAMPS

GX53 LED			
POWER	LUM. FLUX (Φ TOTAL)	COLOUR TEMP.	*ADD. SUFFIX
7,2 W	920 Lm	6500 K	.A1K
		4000 K	
		2700 K	
11,3 W	1510 Lm	6500 K	.B1K
		4000 K	
		2700 K	
17 W	2350 Lm	6500 K	.E1K
		4000 K	
		2700 K	


E27		*ADD. SUFFIX
E27 (CFL - LED)	max 160 mm	.E27

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GABRI/LUCIA RANGE

BULKHEAD BOLLARD





GABRI/LUCIA 1L
1R3.613.010

Pcs 1
Kg 4
mc 0,097

Ø 240

GABRI/LUCIA 2L
1R3.613.020

Pcs 1
Kg 5
mc 0,097

Ø 240

GABRI REMI/LUCIA 1L
1R3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/LUCIA 2L
1R3.613.X20

Pcs 1
Kg 6
mc 0,097

Ø 240

GABRI/LUCIA-EL 1L
2R3.613.010

Pcs 1
Kg 4
mc 0,097

Ø 240

GABRI/LUCIA-EL 2L
2R3.613.020

Pcs 1
Kg 5
mc 0,097

Ø 240

GABRI REMI/LUCIA-EL 1L
2R3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/LUCIA-EL 2L
2R3.613.X20

Pcs 1
Kg 6
mc 0,097

Ø 240

GABRI/LUCIA-GD 1L
3R3.613.010

Pcs 1
Kg 4
mc 0,097

Ø 240

GABRI/LUCIA-GD 2L
3R3.613.020

Pcs 1
Kg 5
mc 0,097

Ø 240

GABRI REMI/LUCIA-GD 1L
3R3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/LUCIA-GD 2L
3R3.613.X20

Pcs 1
Kg 6
mc 0,097

Ø 240

MINIGABRI/LUCIA RANGE

BULKHEAD BOLLARD



1R3.612.010




2R3.612.X10



3R3.612.010





MINIGABRI/LUCIA 1L
1R3.612.010

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI/LUCIA 2L
1R3.612.020

Pcs 1
Kg 4,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA 1L
1R3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA 2L
1R3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

MINIGABRI/LUCIA-EL 1L
2R3.612.010

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI/LUCIA-EL 2L
2R3.612.020

Pcs 1
Kg 4,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA-EL 1L
2R3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA-EL 2L
2R3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

MINIGABRI/LUCIA-GD 1L
3R3.612.010

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI/LUCIA-GD 2L
3R3.612.020

Pcs 1
Kg 4,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA-GD 1L
3R3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA-GD 2L
3R3.612.X20


Pcs 1
Kg 5
mc 0,065

Ø 240

GABRI/MADDI RANGE

BULKHEAD BOLLARD





GABRI/MADDI 1L
1V3.613.010

Pcs 1
Kg 4
mc 0,097

Ø 240

GABRI/MADDI 2L
1V3.613.020

Pcs 1
Kg 5
mc 0,097

Ø 240

GABRI REMI/MADDI 1L
1V3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/MADDI 2L
1V3.613.X20

Pcs 1
Kg 6
mc 0,097

Ø 240

GABRI/MADDI-VE 1L
2V3.613.010

Pcs 1
Kg 4
mc 0,097

Ø 240

GABRI/MADDI-VE 2L
2V3.613.020

Pcs 1
Kg 5
mc 0,097

Ø 240

GABRI REMI/MADDI-VE 1L
2V3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/MADDI-VE 2L
2V3.613.X20

Pcs 1
Kg 6
mc 0,097

Ø 240

GABRI REMI/MADDI-HL 1L
3V3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/MADDI-HL 2L
3V3.613.X20

Pcs 1
Kg 6
mc 0,097

Ø 240

MINIGABRI/MADDI RANGE

BULKHEAD BOLLARD



1V3.612.X10




1V3.612.020



2V3.612.010





MINIGABRI/MADDI 1L
1V3.612.010

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI/MADDI 2L
1V3.612.020

Pcs 1
Kg 4,5
mc 0,065

Ø 240

MINIGABRI REMI/MADDI 1L
1V3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/MADDI 2L
1V3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

MINIGABRI/MADDI-VE 1L
2V3.612.010

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI/MADDI-VE 2L
2V3.612.020

Pcs 1
Kg 4,5
mc 0,065

Ø 240

MINIGABRI REMI/MADDI-VE 1L
2V3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/MADDI-VE 2L
2V3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

MINIGABRI REMI/MADDI-HL 1L
3V3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/MADDI-HL 2L
3V3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

PINA - PINELA/ RANGE

BULKHEAD BOLLARD





Bollard range in modern style, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Poles available in two different sizes. Modular system for single or double luminaries installation. To be combined with GERMANA and GIUSEPPE floodlight range (pag. 180 - 188). Insulation class II, protection rating IP66.


Gamma di bollard in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Palo disponibile in due diverse misure. Sistema modulare per permettere l'installazione singola o doppia dei corpi illuminanti. Da combinarsi con la gamma di apparecchi GERMANA e GIUSEPPE (pag. 180 - 188). Classe di isolamento II, grado di protezione IP66.



2N1.613.D2K

CCT SETTABLE

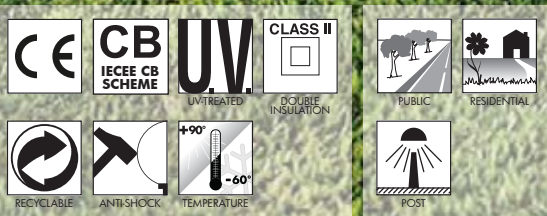



POLES



POST made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Moulded colours in paste, no maintenance or painting required. Post and base are made of one piece only without joints to withstand the most strong stress. Provided with screws for ground fixation.

PALO realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Palo e basamento sono fabbricati in un unico pezzo senza giunzioni per resistere alle più forti sollecitazioni. Provvisto di viti per il fissaggio a terra.

PINA - PINELA POST



Ø 240

Dimensions
Height: 800 mm
Width: 240 mm
Depth: 240 mm

MINIPINELA POST



Ø 240

Dimensions
Height: 500 mm
Width: 240 mm
Depth: 240 mm

Moulded colours:
 Black White
 Grey
Diffuser PMMA:
 Opal

LUMINARIES INSTALLATION



IP66

MODULAR SYSTEM for single or double luminaries installation.

SISTEMA MODULARE per permettere l'installazione singola o doppia dei corpi illuminanti.

SUITABLE LUMINARIES FOR POST INSTALLATION

FLOODLIGHT



GERMANA
2N1.000

See page 180 for full details about **GERMANA** floodlight.

Informazioni complete sull'apparecchio GERMANA a pag.180.

FLOODLIGHT



GIUSEPPE
4P1.000
4P2.000

See page 188 for full details about **GIUSEPPE** floodlight.

Informazioni complete sull'apparecchio GIUSEPPE a pag.188.

AVAILABLE LAMPS

GX53 LED			
POWER	LUM. FLUX (Φ TOTAL)	COLOUR TEMP.	*ADD. SUFFIX
2x 3W 6W	820 lm	6500 K	.G2K
		4000 K	
		3000 K	
2x 10W 14W	2580 lm	6500 K	.D2K
		4000 K	
		3000 K	
E27			
E27 (CFL -LED)	max 160 mm		.P27

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

AVAILABLE LAMPS

GX53 LED			
POWER	LUM. FLUX (Φ TOTAL)	COLOUR TEMP.	*ADD. SUFFIX
7,2 W	920 lm	6500 K	.A1K
		4000 K	
		2700 K	
11,3 W	1510 lm	6500 K	.B1K
		4000 K	
		2700 K	
17 W	2350 lm	6500 K	.E1K
		4000 K	
		2700 K	

AVAILABLE LAMPS


4X GX53 LED			
POWER	LUM. FLUX (Φ TOTAL)	COLOUR TEMP.	*ADD. SUFFIX
4x 10W 40W	5160 lm	6500 K	.D4K
		4000 K	
		3000 K	
2x E27			
2xE27 (CFL -LED)	max 160 mm		.P27


PINA - PINELA RANGE


BULKHEAD BOLLARD




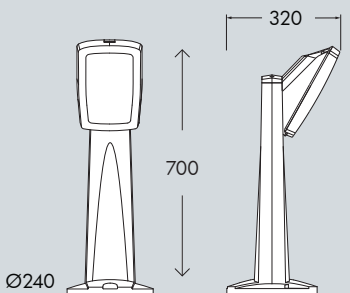



MINIPINELA 1L	
6W	2N1.612.010.G2K
20W	2N1.612.010.D2K
<p>2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K</p>  <p>Pcs 1 Kg 3,5 mc 0,06</p>	
E27 lampholder	2N1.612.010.P27
E27 with sensor	2N1.612.010.PS7

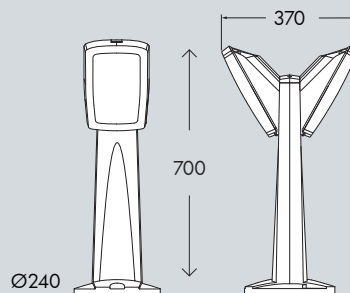MINIPINELA 2L	
2x6W	2N1.612.020.G2K
2x20W	2N1.612.020.D2K
<p>2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K</p>  <p>Pcs 1 Kg 4 mc 0,06</p>	
E27 lampholder	2N1.612.020.P27
E27 with sensor	2N1.612.020.PS7

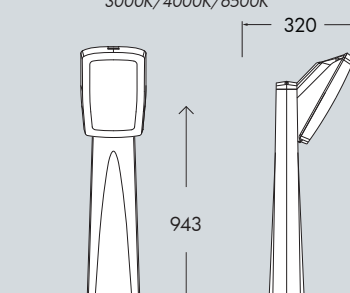PINELA 1L	
6W	2N1.613.010.G2K
20W	2N1.613.010.D2K
<p>2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K</p>  <p>Pcs 1 Kg 4 mc 0,097</p>	
E27 lampholder	2N1.613.010.P27
E27 with sensor	2N1.613.010.PS7

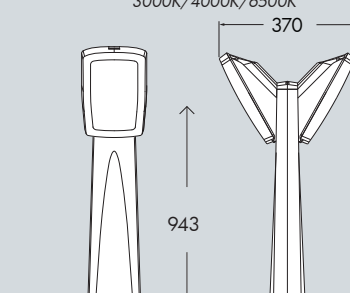PINELA 2L	
2x6W	2N1.613.020.G2K
2x20W	2N1.613.020.D2K
<p>2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K</p>  <p>Pcs 1 Kg 5 mc 0,097</p>	
E27 lampholder	2N1.613.020.P27
E27 with sensor	2N1.613.020.PS7

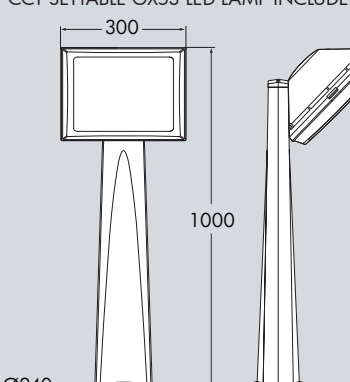PINA 1L	
7,2W	4P1.613.010.A1K
11,3W	4P1.613.010.B1K
17W	4P1.613.010.E1K
40W	4P2.613.010.D4K
<p>CCT SETTABLE GX53 LED LAMP INCLUDED</p>  <p>Pcs 1 Kg 4,5 mc 0,097</p>	
2xE27 lampholder	4P2.613.010.E28
2xE27 with sensor	4P2.613.010.ES8

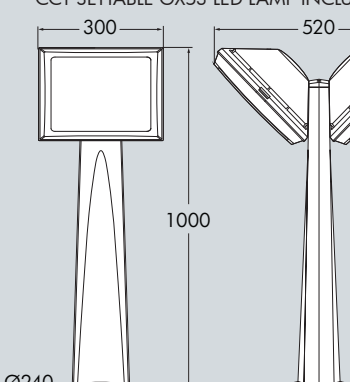PINA 2L	
2x 7,2W	4P1.613.020.A1R
2x 11,3W	4P1.613.020.B1R
2x 17W	4P1.613.020.E1R
2x 40W	4P2.613.020.D4R
<p>CCT SETTABLE GX53 LED LAMP INCLUDED</p>  <p>Pcs 1 Kg 7 mc 0,097</p>	
2xE27 lampholder	4P2.613.020.E28
2xE27 with sensor	4P2.613.020.ES8



BULKHEAD

Bulkhead lamp with no visible screws and front light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with **E27** lampholder. Version with motion sensor available. Insulation class II, Protection rating IP66.



Plafoniera senza viti a vista con emissione della luce frontale. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Completa di lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o fornita nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.



2A1.000

CCT SETTABLE



3000 K


4000 K

6500 K

SDCM <6



MADE IN ITALY



FRANCY-OP - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material UV-rays stabilized. Designed for getting front light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV. Disegnata per ottenere un'emissione frontale della luce.



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.



BASE made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided with E27 or with 2x GX53 lampholders and complete with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampada E27 o di 2 portalampada GX53. Completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

FRANCY-OP



Dimensions and weight

Width: 130 mm
Height: 300 mm
Depth: 90 mm
Weight: 0,6 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED



Bulkhead supplied **fully pre-wired** complete with 2 x TÜV-CB certified long-life, efficient and Kelvin settable **GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.


100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
(*)	2x 3W 6 W	820 lm	6500 K 4000 K 3000 K	.G2K

2x 3W = 60W
820 Lm = incandescent

SAVE 93%

CCT SETTABLE LED LAMP (*)

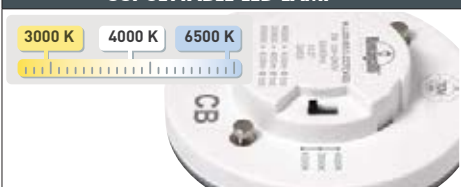

E27



Bulkhead supplied **fully pre-wired** with E27 lampholder. Provided as an option with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use.

E27 (CFL-LED)	max 160 mm	*ADD. SUFFIX
	↔	.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
(*)	6,5 W	800 lm	2700 K	.F1R
(*)	8,5 W	920 lm	6500 K 4000 K 3000 K	.V1K

E27 with sensor



Bulkhead supplied **fully pre-wired** with E27 lampholder and E27 LED lamps as an option. Complete with microwave daylight and motion **sensor**. Sensor operating voltage: 220-240V. (120V version available on demand).

E27 (CFL-LED)	max 160 mm	*ADD. SUFFIX
	↔	.ES7

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
(*)	6,5 W	800 lm	2700 K	.S1R
(*)	8,5 W	920 lm	6500 K 4000 K 3000 K	.V1K

6,5W filament = 60W incandescent

8,5W CCT = incandescent


SAVE up to 89%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

FRANCY-OP

RECTANGULAR





FRANCY-OP GX53	
2x3W	2A1.000.G2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K	
<p>Pcs 24 Kg 17,2 mc 0,12</p>	

FRANCY-OP E27	
6,5W filament	2A1.000.F1R
8,5W CCT set	2A1.000.V1K
<p>Pcs 24 Kg 15,7 mc 0,12</p>	
E27 lampholder	2A1.000.E27
E27 with sensor	2A1.000.ES7

BERTINA

SMALL ROUND



LED bulkhead lamp with round shape and **no visible screws**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamps included**. Insulation class II, Protection rating IP66.



*Plafoniera circolare a LED senza viti a vista. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Fornita con **incluse lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB, di lunga durata ed elevata efficienza, disponibili in diverse potenze. Classe di isolamento II, grado di protezione IP66.*




1B1.000.D1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





BERTINA - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista realizzata in resina antiurto stabilizzata ai raggi UV.



Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.



BASE made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided with GX53 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampe GX53 e di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BERTINA



Dimensions and weight

Diameter: \varnothing 200 mm
Depth: 70 mm
Weight: 0,6 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V



Bulkhead supplied **fully pre-wired** complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	
GX53 LED	10 W	1290 lm	6500 K	.D1K
			4000 K	
			3000 K	

3W = **40W**
410 Lm = incandescent
SAVE 93%

10W = **100W**
1290 Lm = incandescent
SAVE 90%

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

BERTINA

SMALL ROUND






BERTINA	
3W	1B1.000.G1K
10W	1B1.000.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 45 Kg 30 mc 0,194	

BERTA

MEDIUM ROUND



Round bulkhead lamp with **no visible screws**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



*Plafoniera circolare **senza viti a vista**, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione **GX53 LED con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*



1B2.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



BERTA - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista realizzata in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder. Complete with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalamпада GX53 o di piatto riflettente in resina bianca e portalamпада E27. Completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BERTA



Dimensions and weight

Diameter: \varnothing 275 mm
Depth: 80 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
17 W	2350 lm	6500 K	.E1K	
		4000 K		
		2700 K		

E27

FULLY PRE-WIRED




Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

E27 (CFL -LED)	max 160 mm ↔	*ADD. SUFFIX .P27
E27 + SENSOR (CFL -LED)		.PS7

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.




7,2W
11,3W
17W = 60W
100W
150W
incandescent
SAVE 88%

BERTA

MEDIUM ROUND





BERTA GX53	
7,2W	1B2.000.A1K
11,3W	1B2.000.B1K
17W	1B2.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
Pcs 16	
Kg 20	
mc 0,194	

BERTA E27	
E27 lampholder	1B2.000.P27
E27 with sensor	1B2.000.PS7
Pcs 16	
Kg 16,8	
mc 0,194	

UMBERTA

LARGE ROUND



Round bulkhead lamp with **no visible screws**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED or 2xE27 version** available. Provided as option with motion sensor or emergency kit. Insulation class II, Protection rating IP66.



*Plafoniera circolare **senza viti a vista**, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a **LED GX53 con Kelvin impostabile** o **2xE27**. Fornita anche con sensore o kit d'emergenza. Classe di isolamento II, grado di protezione IP66.*



1B3.000

CCT SETTABLE

2700 K 4000 K 6500 K


SDCM <6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE		WALL	CEILING	



UMBERTA - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free.


COVER in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE complete with highly heat resistant **REFLECTIVE PLATE**, suitable for the electrical devices fixation. Provided with GX53 or E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE completa di PIATTO RIFLETTENTE ad alta resistenza al calore, adatto ad alloggiare gli accessori elettrici. Fornita completa di portalampana GX53 o E27 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

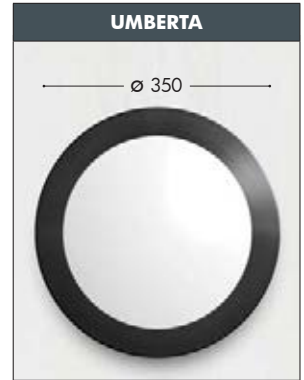

Dimensions and weight

Diameter: ø 350 mm
Depth: 94 mm
Weight: 1,3 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal



GX53 LED

Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available. Quick and easy lamp replacement for a very simple maintenance after installation. Daylight and motion sensor available as option.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
	17 W	2350 lm	6500 K	.E1K
			4000 K	
			2700 K	
	7,2 W + SENSOR	920 lm	6500 K	.ASK
			4000 K	
			2700 K	
	11,3 W + SENSOR	1510 lm	6500 K	.BSK
			4000 K	
			2700 K	
	17 W + SENSOR	2350 lm	6500 K	.ESK
			4000 K	
			2700 K	



E27

Bulkhead supplied **fully pre-wired** with single or double **E27 lampholder**.

Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

*ADD. SUFFIX

E27 (CFL -LED)	.E27
2x E27 (CFL -LED)	.E28
E27 + SENSOR (CFL -LED)	.ES7
2x E27 + SENSOR (CFL -LED)	.ES8

7,2W
11,3W
17W = 60W
100W
150W
incandescent

SAVE 88%


LED LAMPS



LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

EMERGENCY VERSION




Detailed information on page 256

1B3.000.EM1

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

UMBERTA
LARGE ROUND





UMBERTA GX53	
7,2W	1B3.000.A1K
11,3W	1B3.000.B1K
17W	1B3.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
Pcs 12 Kg 22 mc 0,198	


UMBERTA E27	
1xE27 lampholder	1B3.000.E27
2xE27 lampholder	1B3.000.E28
1xE27 with sensor	1B3.000.ES7
2xE27 with sensor	1B3.000.ES8
Pcs 12 Kg 19,6 mc 0,198	

UMBERTA EMERGENCY

LARGE ROUND




LED MAINTAINED EMERGENCY bulkhead lamp with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. In case of blackout, the bulkhead switches from Normal mode to Emergency mode and keeps on working. Minimum 3 hours battery operating time. Insulation class II, Protection rating IP66.



UMBERTA
EMERGENCY
1B3.000.EM1

Plafoniera a LED, RETE PIU' EMERGENZA, senza viti a vista. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. In caso di interruzione di corrente, la plafoniera passa dalla modalità "Normale" alla modalità "Emergenza" e rimane accesa. Autonomia minima 3 ore. Classe di isolamento II, grado di protezione IP66.

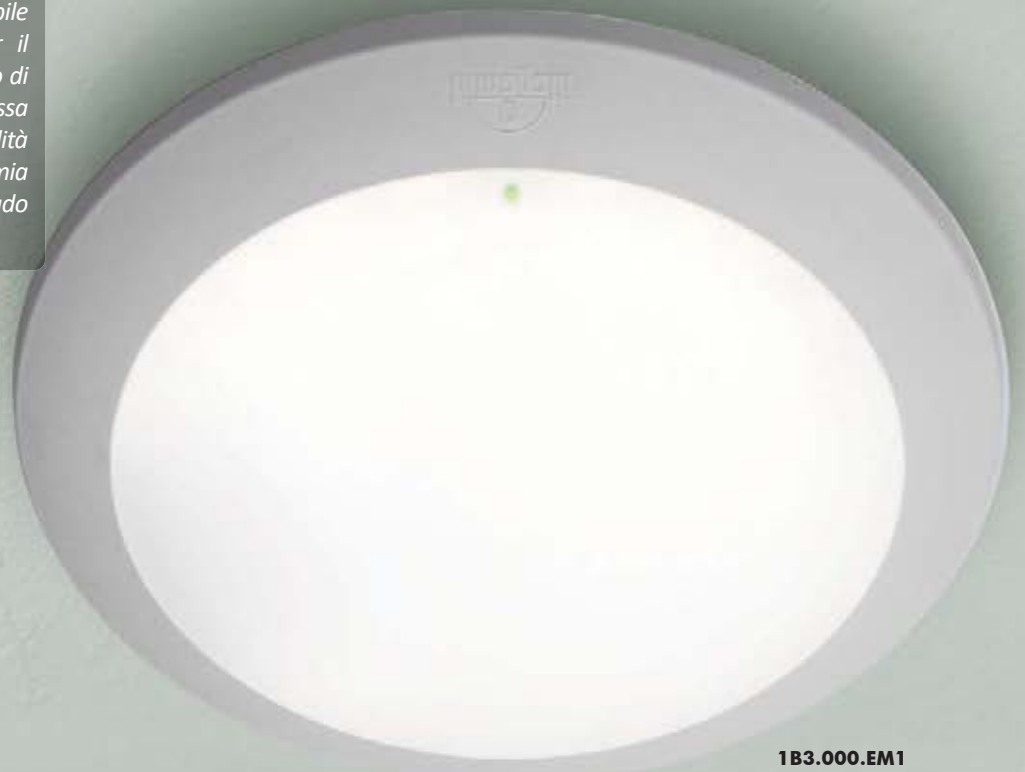


1B3.000.EM1



UMBERTA EMERGENCY - COMPONENTS

IP 66

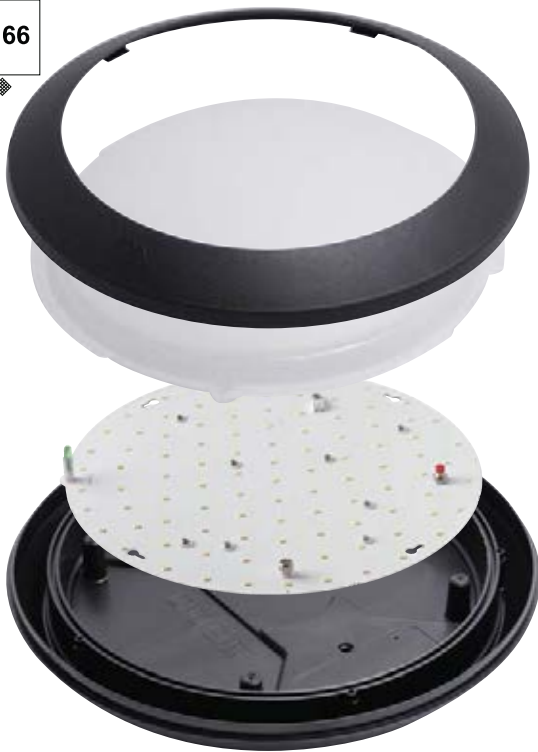

LED Printed Circuit Board provided with a fully-prewired **Emergency Kit**. In case of blackout the bulkhead automatically switches from Normal mode (15W - 2000 lm) to Emergency mode (2,4W - 250 lm) and keeps on working for the next 3 hours.

Circuito stampato a LED fornito completo di kit d'emergenza pre-cablato. In caso di interruzione di corrente, la plafoniera passa dalla modalità "Normale" (15W - 2000 lm) alla modalità "Emergenza" (2,4W - 250lm) e rimane accesa per 3 ore.



UMBERTA



Dimensions and weight

Diameter: Ø 350 mm
Depth: 94 mm
Weight: 2,3 Kg

Moulded Colours:



Black Grey White

Diffuser PMMA:

Opal

UMBERTA MAINTAINED EMERGENCY

1B3.000.EM1

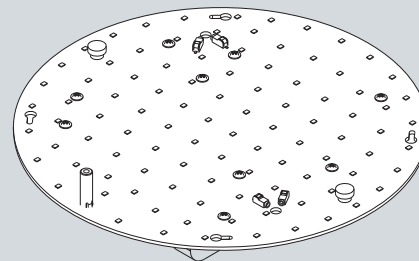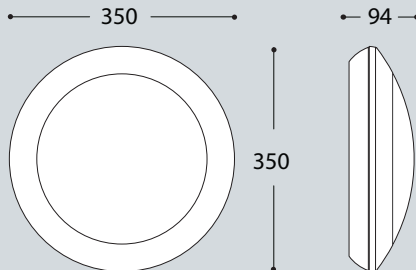


Pcs 12
Kg 25
mc 0,198



PRODUCT TYPE	Wall and Ceiling bulkhead with Emergency kit
OPERATING VOLTAGE	220~240 vAC
LUMINOUS FLUX & POWER	2000 lumen (Normal mode), 15W 250 lumen (Emergency mode), 2.4W
LED TYPE	Edison SMD 2835, 4000 K
CRI	>80Ra
PF (POWER FACTOR)	>0.95
BEAM ANGLE	120°
OPERATING TEMPERATURE	0~50°C
BATTERY	Ni-MH, BK370Ah3.6V, Panasonic (3.5Ah, 3.6V)
BATTERY OPERATING TIME	min 3 hours (250 lumen)
BATTERY CHARGING TIME	24 hours
Drivers Standards	EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62384, EN 60598-2-22 EN 55015, EN61547, EN 61000-3-2, EN 61000-3-3
Battery Standards	EN 5501-1, EN 61000, EN 55014-2



Emergency details



SAVE 90%



COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GELMI RANGE

ROUND



Round bulkhead lamp with ring, eyelid or grid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



Plafoniera circolare con cover ad anello, a palpebra o a griglia. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a LED GX53 con Kelvin impostabile o E27. Classe di isolamento II, grado di protezione IP66.



CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6

CE CB IECB SCHEME UV UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK TEMPERATURE +90° -60°

PUBLIC RESIDENTIAL INDOOR OUTDOOR WALL CEILING



GELMI - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.

***COVER** in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

***BASE** realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalampana GX53 o di piatto riflettente in resina bianca e portalampana E27.*

GELMI



Dimensions and weight

Diameter: \varnothing 313 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:


Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP

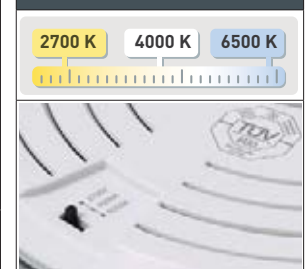

CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
	17 W	2350 lm	6500 K	.E1K
			4000 K	
			2700 K	

60W = 7,2W
 100W = 11,3W
 150W = 17W
SAVE 88%

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

Model	Max Depth	*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GELMI RANGE

ROUND





GELMI GX53	
7,2W	1G3.000.A1K
11,3W	1G3.000.B1K
17W	1G3.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
Pcs 16 Kg 20 mc 0,194	

GELMI E27	
E27 lampholder	1G3.000.E27
E27 with sensor	1G3.000.ES7
Pcs 16 Kg 16,8 mc 0,194	

GELMI-EL GX53	
7,2W	2G3.000.A1K
11,3W	2G3.000.B1K
17W	2G3.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
Pcs 16 Kg 20 mc 0,194	

GELMI-EL E27	
E27 lampholder	2G3.000.E27
E27 with sensor	2G3.000.ES7
Pcs 16 Kg 16,8 mc 0,194	

GELMI-GR GX53	
7,2W	3G3.000.A1K
11,3W	3G3.000.B1K
17W	3G3.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
Pcs 16 Kg 20 mc 0,194	

GELMI-GR E27	
E27 lampholder	3G3.000.E27
E27 with sensor	3G3.000.ES7
Pcs 16 Kg 16,8 mc 0,194	


COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

DANZI RANGE

OVAL



Oval bulkhead lamp with ring, eyelid or grid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



Plafoniera ovale con cover ad anello, a palpebra o a griglia. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a LED GX53 con Kelvin impostabile o E27. Classe di isolamento II, grado di protezione IP66.



1D3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



DANZI - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.

COVER in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalamпада GX53 o di piatto riflettente in resina bianca e portalamпада E27.

DANZI



Dimensions and weight

Width: 245 mm
Height: 338 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜ-CB certified long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
17 W	2350 lm	6500 K	.E1K	
		4000 K		
			2700 K	

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

E27

(CFL -LED)

max 160 mm

*ADD. SUFFIX

.E27

E27 + SENSOR

(CFL -LED)



.ES7

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.



7,2W
11,3W
17W

=
60W
100W
150W

incandescent

SAVE 88%



* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

DANZI RANGE

OVAL



DANZI GX53

7,2W	1D3.000.A1K
11,3W	1D3.000.B1K
17W	1D3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 18,7
mc 0,194

DANZI E27

E27 lampholder	1D3.000.E27
E27 with sensor	1D3.000.ES7

Pcs 16
Kg 15,5
mc 0,194

DANZI-VE GX53

7,2W	2D3.000.A1K
11,3W	2D3.000.B1K
17W	2D3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 18,7
mc 0,194

DANZI-VE E27

E27 lampholder	2D3.000.E27
E27 with sensor	2D3.000.ES7

Pcs 16
Kg 15,5
mc 0,194

DANZI-GR GX53

7,2W	3D3.000.A1K
11,3W	3D3.000.B1K
17W	3D3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 18,7
mc 0,194

DANZI-GR E27

E27 lampholder	3D3.000.E27
E27 with sensor	3D3.000.ES7

Pcs 16
Kg 15,5
mc 0,194

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

STUCCHI

SQUARE



Square bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Supplied as option with colored backlit base. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



STUCCHI
1U3.000

*Plafoniera quadra realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*



1U3.000.BU1

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM < 6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE		WALL	CEILING	



STUCCHI - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized.


COVER in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

BASE realizzata in resina antiurto. Fornita completa di portalampana E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.

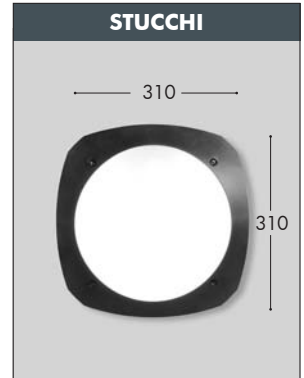

Dimensions and weight

Height: 310 mm
Width: 310 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:



Diffuser PMMA:



LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
11,3 W	1510 lm	6500 K	.B1K	
		4000 K		
		2700 K		
17 W	2350 lm	6500 K	.E1K	
		4000 K		
		2700 K		

7,2W
11,3W
17W

60W
100W
150W

incandescent

SAVE 88%

E27




Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

	max 160 mm	*ADD. SUFFIX
E27 (CFL -LED)		.E27
E27 + SENSOR (CFL -LED)		.ES7

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

STUCCHI

SQUARE



MADE IN ITALY



STUCCHI GX53	
7,2W	1U3.000.A1K
11,3W	1U3.000.B1K
17W	1U3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 20
mc 0,194

STUCCHI E27	
E27 lampholder	1U3.000.E27
E27 with sensor	1U3.000.ES7

Pcs 16
Kg 16.8
mc 0,194

CECCHI

RECTANGULAR



Rectangular bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Supplied as option with coloured backlit base. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



*Plafoniera rettangolare realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*

1H3.000.C11



CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



CECCHI COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized.

COVER in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlight colours to create a coloured effect on wall and ceilings.

BASE realizzata in resina antiurto. Fornita completa di portalampada E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.



CECCHI



Dimensions and weight

Width: 338 mm
Height: 245 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
11,3 W	1510 lm	6500 K	.B1K	
		4000 K		
		2700 K		
17 W	2350 lm	6500 K	.E1K	
		4000 K		
		2700 K		

E27




Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

7,2W
11,3W
17W

60W
100W
150W

incandescent

SAVE 88%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

CECCHI

RECTANGULAR



MADE IN ITALY



CECCHI GX53	
7,2W	1H3.000.A1K
11,3W	1H3.000.B1K
17W	1H3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 18,7
mc 0,194

CECCHI E27	
E27 lampholder	1H3.000.E27
E27 with sensor	1H3.000.ES7

Pcs 16
Kg 15,5
mc 0,194

RITA

CLASSIC ROUND



Round bulkhead lamp in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED or E27 version available.** Insulation class II, Protection rating IP66.



Plafoniera circolare in stile classico, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a LED GX53 con Kelvin impostabile o E27. Classe di isolamento II, grado di protezione IP66.



173.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



RITA COMPONENTS

IP 66



COVER with classic design made of shockproof resin material, UV-rays stabilized.

COVER in stile classico realizzata in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalamпада GX53 o di piatto riflettente in resina bianca e portalamпада E27.

RITA



Dimensions and weight

Diameter: Ø 355 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified approved, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
17 W	2350 lm	6500 K	.E1K	
		4000 K		
		2700 K		

7,2W
 11,3W
 17W
 =
 60W
 100W
 150W
 incandescent
SAVE 88%

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

	max 160 mm	*ADD. SUFFIX
E27 (CFL -LED)		.E27
E27 + SENSOR (CFL -LED)		.E57

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE



RITA



CLASSIC ROUND



1T3.000

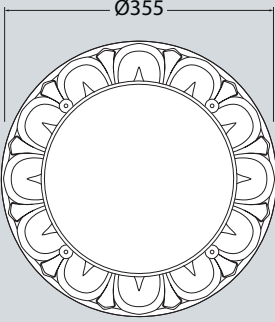

RITA GX53	
7,2W	1T3.000.A1K
11,3W	1T3.000.B1K
17W	1T3.000.E1K
<p>CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>Ø355</p>  </div> <div style="text-align: center;"> <p>90</p>  </div> </div>	
Pcs 12	
Kg 17,8	
mc 0,198	

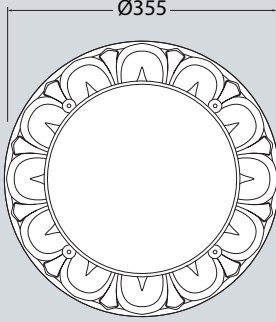RITA E27	
E27 lampholder	1T3.000.E27
E27 with sensor	1T3.000.ES7
<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>Ø355</p>  </div> <div style="text-align: center;"> <p>90</p>  </div> </div>	
Pcs 12	
Kg 15,4	
mc 0,198	

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES


LUCIA RANGE

ROUND



Round bulkhead lamp with ring, eyelid or guard cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for ceiling, wall and post installation also with bracket angled at 35°. Supplied as option with coloured backlit base. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

*Plafoniera circolare con cover ad anello, a palpebra o a manubrio. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete, a soffitto e a palo anche con braccio angolato a 35°. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*



1R3.000.OR1

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6





LUCIA COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.


COVER in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

BASE realizzata in resina antiurto. Fornita completa di portalampada E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.



Dimensions and weight

Diameter: \varnothing 300 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, and **Kelvin settable GX53 LED lamp included**. Different wattages available.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
11,3 W	1510 lm	6500 K	.B1K	
		4000 K		
		2700 K		
17 W	2350 lm	6500 K	.E1K	
		4000 K		
		2700 K		



7,2W
11,3W
17W = 60W
100W
150W
incandescent

SAVE 88%



E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

BOLLARD VERSION



Lucia bulkhead range can be mounted on a pole with or without an angled bracket. More detailed information at page 224.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LUCIA RANGE


ROUND





LUCIA E27
1R3.000.E27

Pcs 16
Kg 16,8
mc 0,194

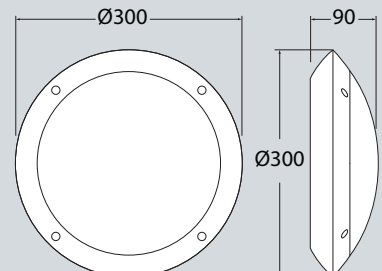

Ø300 90
Ø300


CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

LUCIA GX53

7,2W	1R3.000.A1K
11,3W	1R3.000.B1K
17W	1R3.000.E1K

REMI/LUCIA E27
1R3.602.E27

Pcs 16
Kg 20
mc 0,194

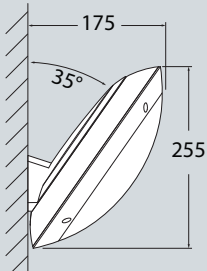

175 35° 255


CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/LUCIA GX53

7,2W	1R3.602.A1K
11,3W	1R3.602.B1K
17W	1R3.602.E1K

LUCIA-EL E27
2R3.000.E27

Pcs 16
Kg 16,8
mc 0,194

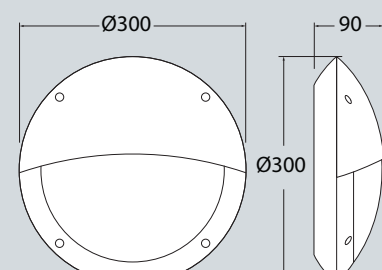

Ø300 90
Ø300


CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

LUCIA-EL GX53

7,2W	2R3.000.A1K
11,3W	2R3.000.B1K
17W	2R3.000.E1K

REMI/LUCIA-EL E27
2R3.602.E27

Pcs 16
Kg 20
mc 0,194

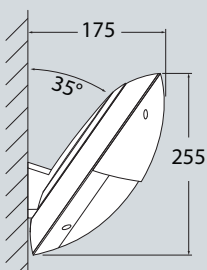

175 35° 255


CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/LUCIA-EL GX53

7,2W	2R3.602.A1K
11,3W	2R3.602.B1K
17W	2R3.602.E1K

LUCIA-GD E27
3R3.000.E27

Pcs 16
Kg 16,8
mc 0,194

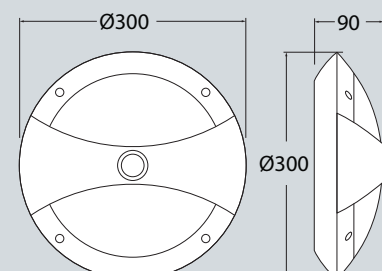

Ø300 90
Ø300


CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

LUCIA-GD GX53

7,2W	3R3.000.A1K
11,3W	3R3.000.B1K
17W	3R3.000.E1K

REMI/LUCIA-GD E27
3R3.602.E27

Pcs 16
Kg 20
mc 0,194

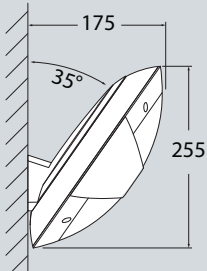

175 35° 255

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/LUCIA-GD GX53

7,2W	3R3.602.A1K
11,3W	3R3.602.B1K
17W	3R3.602.E1K

MADDI RANGE

OVAL



Oval bulkhead lamp with ring, vertical eyelid or horizontal eyelid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall, ceiling and post installation also with bracket angled at 35°. Supplied as option with coloured backlit base. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

*Plafoniera ovale con cover ad anello o a palpebra (orizzontale o verticale). Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete, a soffitto e a palo anche con braccio angolato a 35°. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*




1V3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6

MADE IN ITALY



MADDI COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.


COVER in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

BASE realizzata in resina antiurto. Fornita completa di portalamпада E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.



Dimensions and weight

Width: 230 mm
Height: 330 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

BOLLARD VERSION



Maddi bulkhead range can be mounted on a pole with or without an angled bracket. More detailed information at page 224.

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, and **kelvin settable GX53 LED lamp included**. Different wattages available.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K	.A1K
			4000 K	
			2700 K	
	11,3 W	1510 lm	6500 K	.B1K
			4000 K	
			2700 K	
17 W	2350 lm	6500 K	.E1K	
		4000 K		
		2700 K		

7,2W
11,3W
17W = 60W
100W
150W
incandescent
SAVE 88%

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

E27 (CFL-LED)	max 160 mm	.E27
E27 + SENSOR (CFL-LED)		.ES7

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

MADDI RANGE

OVAL



1V3.000.GN1



2V3.000



1V3.602




3V3.000




2V3.602





MADDI E27
1V3.000.E27

Pcs 16
Kg 15,5
mc 0,194

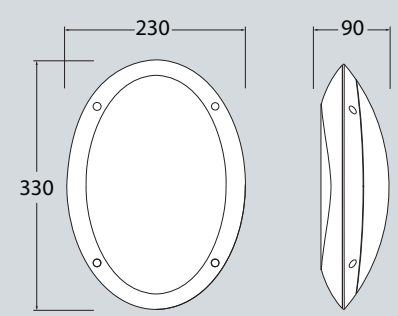


CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

MADDI GX53

7,2W	1V3.000.A1K
11,3W	1V3.000.B1K
17W	1V3.000.E1K

REMI/MADDI E27
1V3.602.E27

Pcs 16
Kg 18,7
mc 0,194

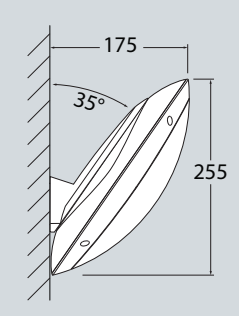


CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/MADDI GX53

7,2W	1V3.602.A1K
11,3W	1V3.602.B1K
17W	1V3.602.E1K

MADDI-VE E27
2V3.000.E27

Pcs 16
Kg 15,5
mc 0,194

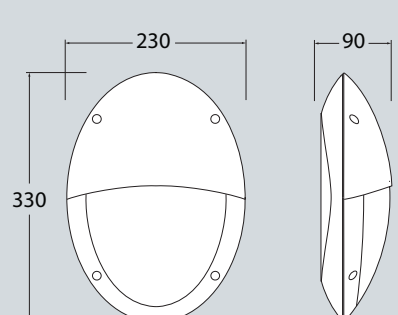


CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

MADDI-VE GX53

7,2W	2V3.000.A1K
11,3W	2V3.000.B1K
17W	2V3.000.E1K

REMI/MADDI-VE E27
2V3.602.E27

Pcs 16
Kg 18,7
mc 0,194

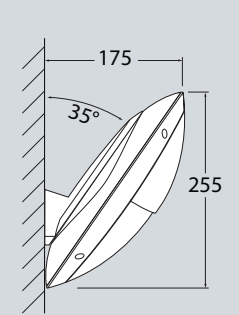


CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/MADDI-VE GX53

7,2W	2V3.602.A1K
11,3W	2V3.602.B1K
17W	2V3.602.E1K

MADDI-HL E27
3V3.000.E27

Pcs 16
Kg 15,5
mc 0,194

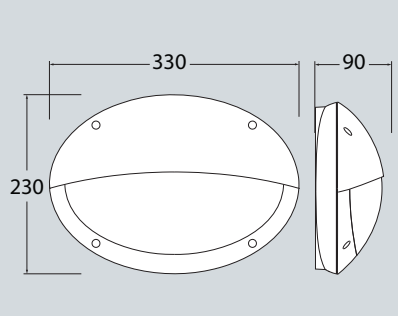


CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

MADDI-HL GX53

7,2W	3V3.000.A1K
11,3W	3V3.000.B1K
17W	3V3.000.E1K

REMI/MADDI-HL E27
3V3.602.E27

Pcs 16
Kg 18,7
mc 0,194

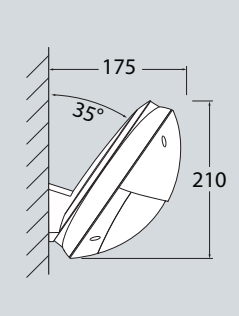

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/MADDI-HL GX53

7,2W	3V3.602.A1K
11,3W	3V3.602.B1K
17W	3V3.602.E1K



GARDEN

MARY

SMALL SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.


6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT

INDOOR & OUTDOOR USE



Q18.110.F1R





MARY - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

MARY

Q18.000 *



Dimensions and weight

Height: 290 mm
Width: 180 mm
Depth: 180 mm
Weight: 1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



E27 CCT SET(*)



100 - 240 V

*ADD SUFFIX

suitable lamps:
CFL-LED
max 150 mm

E27
lampholder only .E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K

6,5W filament = **60W incandescent**

8,5W CCT

SAVE up to 89%

- Perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.


LED LAMPS



LVD EMC ERP


Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

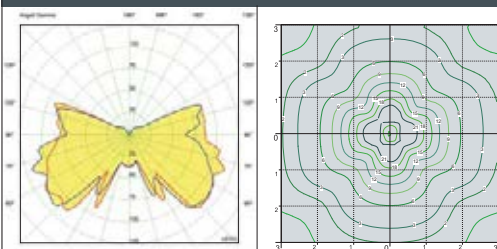

MARY lantern clear with Fumagalli Filament Led Lamp 6,5W.

POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

MARY

SMALL SIZE



Q18.151.F1R




Q18.131.F1R



Q18.120.F1R

MADE IN ITALY



BISSO/MARY

E27 lampholder	Q18.131.E27
6,5W filament	Q18.131.F1R
8,5W CCT set	Q18.131.V1K

Pcs 18
Kg 27,6
mc 0,209

SICHEM/MARY

E27 lampholder	Q18.120.E27
6,5W filament	Q18.120.F1R
8,5W CCT set	Q18.120.V1K

Pcs 18
Kg 29,1
mc 0,209

MARY

Q18.000

Pcs 1
Kg 1
mc 0,011

MIKROLOT/MARY

E27 lampholder	Q18.110.E27
6,5W filament	Q18.110.F1R
8,5W CCT set	Q18.110.V1K

Pcs 18
Kg 25,4
mc 0,209

PORPORA/MARY

E27 lampholder	Q18.141.E27
6,5W filament	Q18.141.F1R
8,5W CCT set	Q18.141.V1K

Pcs 1
Kg 3,5
mc 0,024


MIZAR/MARY resin

E27 lampholder	Q18.151.E27
6,5W filament	Q18.151.F1R
8,5W CCT set	Q18.151.V1K

Pcs 1
Kg 2,8
mc 0,044

MARY
SMALL SIZE





ARTU' BISSO/MARY 2+1

E27 lampholder	Q18.158.S21.E27
6,5W filament	Q18.158.S21.F1R
8,5W CCT set	Q18.158.S21.V1K

Pcs 1
Kg 17,5
mc 0,176

ARTU' BISSO/MARY 3+1

E27 lampholder	Q18.158.S31.E27
6,5W filament	Q18.158.S31.F1R
8,5W CCT set	Q18.158.S31.V1K

Pcs 1
Kg 17,9
mc 0,176

GIGI BISSO/MARY 2+1

E27 lampholder	Q18.156.S21.E27
6,5W filament	Q18.156.S21.F1R
8,5W CCT set	Q18.156.S21.V1K

Pcs 1
Kg 18,8
mc 0,182

GIGI BISSO/MARY 3+1

E27 lampholder	Q18.156.S31.E27
6,5W filament	Q18.156.S31.F1R
8,5W CCT set	Q18.156.S31.V1K

Pcs 1
Kg 20,3
mc 0,182

ARTU' BISSO/MARY 2L

E27 lampholder	Q18.158.S20.E27
6,5W filament	Q18.158.S20.F1R
8,5W CCT set	Q18.158.S20.V1K

Pcs 1
Kg 16,5
mc 0,176

ARTU' BISSO/MARY 3L

E27 lampholder	Q18.158.S30.E27
6,5W filament	Q18.158.S30.F1R
8,5W CCT set	Q18.158.S30.V1K

Pcs 1
Kg 17,4
mc 0,176

GIGI BISSO/MARY 2L

E27 lampholder	Q18.156.S20.E27
6,5W filament	Q18.156.S20.F1R
8,5W CCT set	Q18.156.S20.V1K

Pcs 1
Kg 18,4
mc 0,182

GIGI BISSO/MARY 3L

E27 lampholder	Q18.156.S30.E27
6,5W filament	Q18.156.S30.F1R
8,5W CCT set	Q18.156.S30.V1K

Pcs 1
Kg 19,5
mc 0,182

ANNA

SMALL SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		

E22.110.V1K



MADE IN ITALY

ANNA - LANTERN COMPONENTS

IP55
⚡ ⚠ ⚠







Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

***TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

***DIFFUSORE** in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

ANNA
E22.000 *



220
310
Ø 60

Dimensions and weight
Height: 310 mm
Width: 220 mm
Depth: 192 mm
Weight: 1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT	E27 CCT SET(*)	100 - 240 V	*ADD. SUFFIX															
		<p>suitable lamps: CFL-LED max 160 mm</p> <p>E27 lampholder only .E27</p> <table border="1"> <thead> <tr> <th>LAMP</th> <th>POWER</th> <th>LUMINOUS FLUX UP TO</th> <th>COLOUR TEMP.</th> <th></th> </tr> </thead> <tbody> <tr> <td></td> <td>6,5W</td> <td>800 lm</td> <td>2700 K</td> <td>.F1R</td> </tr> <tr> <td></td> <td>8,5 W</td> <td>920 lm</td> <td>6500 K 4000 K 2700 K</td> <td>.V1K</td> </tr> </tbody> </table>	LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.			6,5W	800 lm	2700 K	.F1R		8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K	
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.															
	6,5W	800 lm	2700 K	.F1R														
	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K														
<ul style="list-style-type: none"> Perfect MATCHING WITH CLASSIC LANTERNS. SUITABLE FOR OUTDOOR USE: 100-240V driver. 360°OMNIDIRECTIONAL LIGHT. HIGH EFFICIENCY: 90% ENERGY SAVING. 	<ul style="list-style-type: none"> A60 CCT SETTABLE: 2700K/4000K/6500K. SUITABLE FOR OUTDOOR USE: 100-240V driver. EYE COMFORT opal glass. HIGH EFFICIENCY: >85% ENERGY SAVING. 	<p>6,5W filament = 60W incandescent</p> <p>8,5W CCT</p> <p>SAVE up to 89%</p>																


LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.



CCT SETTABLE LED LAMP(*)

2700 K 4000 K 6500 K



6500K - 920lm
4000K - 920lm
2700K - 840lm

PHOTOMETRIC DATA SAMPLE

ANNA lantern clear with Fumagalli Filament Led Lamp 6,5W.

POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ANNA
SMALL SIZE



E22.131.F1R



E22.120.F1R



E22.151.V1K

MADE IN ITALY



BISSO/ANNA

E27 lampholder	E22.131.E27
6,5W filament	E22.131.F1R
8,5W CCT set	E22.131.V1K

Pcs 18
Kg 21,2
mc 0,209

SICHEM/ANNA

E27 lampholder	E22.120.E27
6,5W filament	E22.120.F1R
8,5W CCT set	E22.120.V1K

Pcs 18
Kg 21,2
mc 0,209

ANNA
E22.000

Pcs 1
Kg 1
mc 0,011

MIKROLOT/ANNA

E27 lampholder	E22.110.E27
6,5W filament	E22.110.F1R
8,5W CCT set	E22.110.V1K

Pcs 18
Kg 21,2
mc 0,209

PORPORA/ANNA

E27 lampholder	E22.141.E27
6,5W filament	E22.141.F1R
8,5W CCT set	E22.141.V1K

Pcs 1
Kg 3,5
mc 0,024

MIZAR/ANNA resin

E27 lampholder	E22.151.E27
6,5W filament	E22.151.F1R
8,5W CCT set	E22.151.V1K

Pcs 1
Kg 2,4
mc 0,044

ALOE'.R/ANNA resin

E27 lampholder	E22.163.E27
6,5W filament	E22.163.F1R
8,5W CCT set	E22.163.V1K

Pcs 2
Kg 8
mc 0,121

ARTU'/ANNA

E27 lampholder	E22.158.E27
6,5W filament	E22.158.F1R
8,5W CCT set	E22.158.V1K

Pcs 1
Kg 9
mc 0,148

ANNA
SMALL SIZE



E22.156.S30.F1R



E22.156.S30.F1R



E22.156.S20.V1K





ARTU' BISSO/ANNA 2+1

E27 lampholder	E22.158.S21.E27
6,5W filament	E22.158.S21.F1R
8,5W CCT set	E22.158.S21.V1K

Pcs 1
Kg 12,1
mc 0,176

ARTU' BISSO/ANNA 3+1

E27 lampholder	E22.158.S31.E27
6,5W filament	E22.158.S31.F1R
8,5W CCT set	E22.158.S31.V1K

Pcs 1
Kg 13,1
mc 0,176

GIGI BISSO/ANNA 2+1

E27 lampholder	E22.156.S21.E27
6,5W filament	E22.156.S21.F1R
8,5W CCT set	E22.156.S21.V1K

Pcs 1
Kg 14,1
mc 0,182

GIGI BISSO/ANNA 3+1

E27 lampholder	E22.156.S31.E27
6,5W filament	E22.156.S31.F1R
8,5W CCT set	E22.156.S31.V1K

Pcs 1
Kg 15,1
mc 0,182

ARTU' BISSO/ANNA 2L

E27 lampholder	E22.158.S20.E27
6,5W filament	E22.158.S20.F1R
8,5W CCT set	E22.158.S20.V1K

Pcs 1
Kg 11,1
mc 0,176

ARTU' BISSO/ANNA 3L

E27 lampholder	E22.158.S30.E27
6,5W filament	E22.158.S30.F1R
8,5W CCT set	E22.158.S30.V1K

Pcs 1
Kg 12,1
mc 0,176

GIGI BISSO/ANNA 2L

E27 lampholder	E22.156.S20.E27
6,5W filament	E22.156.S20.F1R
8,5W CCT set	E22.156.S20.V1K

Pcs 1
Kg 13,1
mc 0,182

GIGI BISSO/ANNA 3L

E27 lampholder	E22.156.S30.E27
6,5W filament	E22.156.S30.F1R
8,5W CCT set	E22.156.S30.V1K

Pcs 1
Kg 14,1
mc 0,182

SABA

SMALL SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



K22.131.V1K

6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°C	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		

MADE IN ITALY

SABA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SABA

K22.000 *



220



320

Ø 60

Dimensions and weight

Height: 320 mm
Width: 220 mm
Depth: 192 mm
Weight: 1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



- Perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

E27 CCT SET(*)



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K	.V1K
			4000 K	
			2700 K	

6,5W filament = **60W** incandescent
 8,5W CCT


SAVE up to 89%

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



SABA lantern clear with Fumagalli Filament Led Lamp 6,5W.

POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SABA

SMALL SIZE



K22.131.F1R

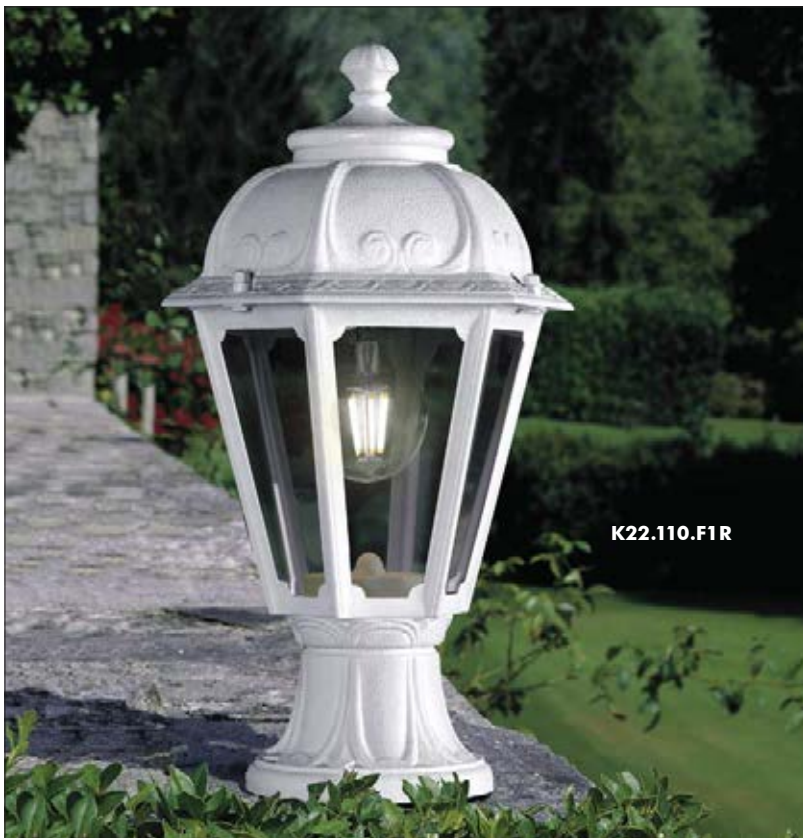

K22.110.F1R



K22.120.V1K

MADE IN ITALY



BISSO/SABA	
E27 lampholder	K22.131.E27
6,5W filament	K22.131.F1R
8,5W CCT set	K22.131.V1K
Pcs 18 Kg 21,2 mc 0,209	

SICHEM/SABA	
E27 lampholder	K22.120.E27
6,5W filament	K22.120.F1R
8,5W CCT set	K22.120.V1K
Pcs 18 Kg 21,2 mc 0,209	

SABA	
K22.000	
Pcs 1 Kg 1 mc 0,011	

MIKROLOT/SABA	
E27 lampholder	K22.110.E27
6,5W filament	K22.110.F1R
8,5W CCT set	K22.110.V1K
Pcs 18 Kg 21,2 mc 0,209	

PORPORA/SABA	
E27 lampholder	K22.141.E27
6,5W filament	K22.141.F1R
8,5W CCT set	K22.141.V1K
Pcs 1 Kg 3,5 mc 0,024	

MIZAR/SABA resin	
E27 lampholder	K22.151.E27
6,5W filament	K22.151.F1R
8,5W CCT set	K22.151.V1K
Pcs 1 Kg 2,4 mc 0,044	

ALOE'.R/SABA resin	
E27 lampholder	K22.163.E27
6,5W filament	K22.163.F1R
8,5W CCT set	K22.163.V1K
Pcs 2 Kg 8 mc 0,121	

ARTU'/SABA	
E27 lampholder	K22.158.E27
6,5W filament	K22.158.F1R
8,5W CCT set	K22.158.V1K
Pcs 1 Kg 9 mc 0,148	

SABA

SMALL SIZE



K22.156.S20.V1K



K22.156.S30.F1R



K22.156.S20.F1R





ARTU' BISSO/SABA 2+1

E27 lampholder	K22.158.S21.E27
6,5W filament	K22.158.S21.F1R
8,5W CCT set	K22.158.S21.V1K

Pcs 1
Kg 12,1
mc 0,176

ARTU' BISSO/SABA 3+1

E27 lampholder	K22.158.S31.E27
6,5W filament	K22.158.S31.F1R
8,5W CCT set	K22.158.S31.V1K

Pcs 1
Kg 13,1
mc 0,176

GIGI BISSO/SABA 2+1

E27 lampholder	K22.156.S21.E27
6,5W filament	K22.156.S21.F1R
8,5W CCT set	K22.156.S21.V1K

Pcs 1
Kg 14,1
mc 0,182

GIGI BISSO/SABA 3+1

E27 lampholder	K22.156.S31.E27
6,5W filament	K22.156.S31.F1R
8,5W CCT set	K22.156.S31.V1K

Pcs 1
Kg 15,1
mc 0,182

ARTU' BISSO/SABA 2L

E27 lampholder	K22.158.S20.E27
6,5W filament	K22.158.S20.F1R
8,5W CCT set	K22.158.S20.V1K

Pcs 1
Kg 11,1
mc 0,176

ARTU' BISSO/SABA 3L

E27 lampholder	K22.158.S30.E27
6,5W filament	K22.158.S30.F1R
8,5W CCT set	K22.158.S30.V1K

Pcs 1
Kg 12,1
mc 0,176

GIGI BISSO/SABA 2L

E27 lampholder	K22.156.S20.E27
6,5W filament	K22.156.S20.F1R
8,5W CCT set	K22.156.S20.V1K

Pcs 1
Kg 13,1
mc 0,182

GIGI BISSO/SABA 3L

E27 lampholder	K22.156.S30.E27
6,5W filament	K22.156.S30.F1R
8,5W CCT set	K22.156.S30.V1K

Pcs 1
Kg 14,1
mc 0,182

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

RUT

MEDIUM SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



E26.110.T1K

	NEW	NEW
6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°C	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		





RUT - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).



Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

RUT

E26.000 *



Dimensions and weight

Height: 410 mm
Width: 260 mm
Depth: 227 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



E27 CCT SET(*)



100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K


- perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

6,5W filament = 60W incandescent
8,5W CCT = 60W incandescent
11W CCT = 75W incandescent

SAVE up to 89%

PHOTOMETRIC DATA SAMPLE

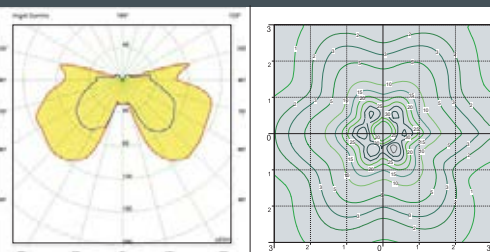

RUT lantern clear with Fumagalli Led Lamp CCT set 8,5W.

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.


LED LAMPS



LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)




CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

RUT

MEDIUM SIZE

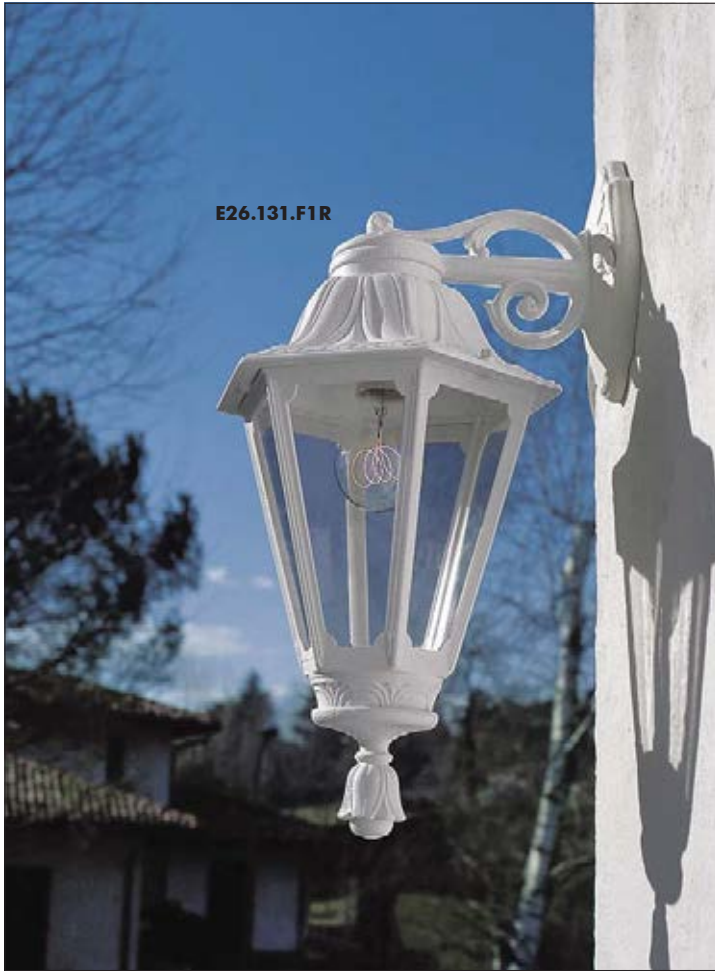

E26.131.F1R



E26.158.T1K



E26.120.F1R



MADE IN ITALY



BISSO/RUT

E27 lampholder	E26.131.E27
6,5W filament	E26.131.F1R
8,5W CCT set	E26.131.V1K
11W CCT set	E26.131.T1K

Pcs 12
Kg 19
mc 0,225

SICHEM/RUT

E27 lampholder	E26.120.E27
6,5W filament	E26.120.F1R
8,5W CCT set	E26.120.V1K
11W CCT set	E26.120.T1K

Pcs 12
Kg 19
mc 0,225

RUT
E26.000

Pcs 1
Kg 1,3
mc 0,018

MINILOT/RUT

E27 lampholder	E26.111.E27
6,5W filament	E26.111.F1R
8,5W CCT set	E26.111.V1K
11W CCT set	E26.111.T1K

Pcs 12
Kg 19
mc 0,225

PORPORA/RUT

E27 lampholder	E26.141.E27
6,5W filament	E26.141.F1R
8,5W CCT set	E26.141.V1K
11W CCT set	E26.141.T1K

Pcs 1
Kg 4
mc 0,034

IAFET/RUT resin

E27 lampholder	E26.162.E27
6,5W filament	E26.162.F1R
8,5W CCT set	E26.162.V1K
11W CCT set	E26.162.T1K

Pcs 2
Kg 79
mc 0,086

MIZAR/RUT resin

E27 lampholder	E26.151.E27
6,5W filament	E26.151.F1R
8,5W CCT set	E26.151.V1K
11W CCT set	E26.151.T1K

Pcs 1
Kg 3
mc 0,07

ALOE'.R/RUT resin

E27 lampholder	E26.163.E27
6,5W filament	E26.163.F1R
8,5W CCT set	E26.163.V1K
11W CCT set	E26.163.T1K

Pcs 2
Kg 8,6
mc 0,121

ARTU'/RUT

E27 lampholder	E26.158.E27
6,5W filament	E26.158.F1R
8,5W CCT set	E26.158.V1K
11W CCT set	E26.158.T1K

Pcs 1
Kg 9,6
mc 0,148

RUT

MEDIUM SIZE



E26.157.S30.F1R



E26.157.S20.T1K



E26.156.F1R





RICU BISSO/RUT 2+1

E27 lampholder	E26.157.S21.E27
6,5W filament	E26.157.S21.F1R
8,5W CCT set	E26.157.S21.V1K
11W CCT set	E26.157.S21.T1K

Pcs 1
Kg 15,2
mc 0,214

RICU BISSO/RUT 3+1

E27 lampholder	E26.157.S31.E27
6,5W filament	E26.157.S31.F1R
8,5W CCT set	E26.157.S31.V1K
11W CCT set	E26.157.S31.T1K

Pcs 1
Kg 16,5
mc 0,214

GIGI/RUT

E27 lampholder	E26.156.E27
6,5W filament	E26.156.F1R
8,5W CCT set	E26.156.V1K
11W CCT set	E26.156.T1K

Pcs 1
Kg 10,9
mc 0,172

RICU/RUT

E27 lampholder	E26.157.E27
6,5W filament	E26.157.F1R
8,5W CCT set	E26.157.V1K
11W CCT set	E26.157.T1K

Pcs 1
Kg 11,7
mc 0,18

RICU BISSO/RUT 2L

E27 lampholder	E26.157.S20.E27
6,5W filament	E26.157.S20.F1R
8,5W CCT set	E26.157.S20.V1K
11W CCT set	E26.157.S20.T1K

Pcs 1
Kg 14,2
mc 0,214

RICU BISSO/RUT 3L

E27 lampholder	E26.157.S30.E27
6,5W filament	E26.157.S30.F1R
8,5W CCT set	E26.157.S30.V1K
11W CCT set	E26.157.S30.T1K

Pcs 1
Kg 15,2
mc 0,214

SALEM

MEDIUM SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°C	90% HUMIDITY	VOLTAGE SURGE RESISTANT

INDOOR & OUTDOOR USE



K26.111.F1R





COMPANY
SOLAR
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

SALEM - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SALEM

K26.000 *



Dimensions and weight

Height: 410 mm
Width: 260 mm
Depth: 227 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

E27 CCT SET(*)



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
	6,5W	800 lm	2700 K	.F1R
	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K
	6,5W filament	=	60W incandescent	
	8,5W CCT	=	75W incandescent	
	11W CCT	=	75W incandescent	

SAVE up to 89%

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



SALEM lantern clear with Fumagalli Led Lamp CCT set 8,5W.

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SALEM

MEDIUM SIZE



MADE IN ITALY



BISSO/SALEM	
E27 lampholder	K26.131.E27
6,5W filament	K26.131.F1R
8,5W CCT set	K26.131.V1K
11W CCT set	K26.131.T1K
Pcs 12 Kg 19 mc 0,225	

SICHEM/SALEM	
E27 lampholder	K26.120.E27
6,5W filament	K26.120.F1R
8,5W CCT set	K26.120.V1K
11W CCT set	K26.120.T1K
Pcs 12 Kg 19 mc 0,225	

SALEM	
K26.000	
Pcs 1 Kg 1,3 mc 0,018	

MINILOT/SALEM	
E27 lampholder	K26.111.E27
6,5W filament	K26.111.F1R
8,5W CCT set	K26.111.V1K
11W CCT set	K26.111.T1K
Pcs 12 Kg 19 mc 0,225	

PORPORA/SALEM	
E27 lampholder	K26.141.E27
6,5W filament	K26.141.F1R
8,5W CCT set	K26.141.V1K
11W CCT set	K26.141.T1K
Pcs 1 Kg 4 mc 0,034	

IAFET/SALEM resin	
E27 lampholder	K26.162.E27
6,5W filament	K26.162.F1R
8,5W CCT set	K26.162.V1K
11W CCT set	K26.162.T1K
Pcs 2 Kg 79 mc 0,086	

MIZAR/SALEM resin	
E27 lampholder	K26.151.E27
6,5W filament	K26.151.F1R
8,5W CCT set	K26.151.V1K
11W CCT set	K26.151.T1K
Pcs 1 Kg 3 mc 0,07	

ALOE'R/SALEM resin	
E27 lampholder	K26.163.E27
6,5W filament	K26.163.F1R
8,5W CCT set	K26.163.V1K
11W CCT set	K26.163.T1K
Pcs 2 Kg 8,6 mc 0,121	

ARTU'/SALEM	
E27 lampholder	K26.158.E27
6,5W filament	K26.158.F1R
8,5W CCT set	K26.158.V1K
11W CCT set	K26.158.T1K
Pcs 1 Kg 9,6 mc 0,148	

SALEM

MEDIUM SIZE



K26.157.S30.F1R



K26.157.S20.T1K



K26.156.F1R





RICU BISSO/SALEM 2+1

E27 lampholder	K26.157.S21.E27
6,5W filament	K26.157.S21.F1R
8,5W CCT set	K26.157.S21.V1K
11W CCT set	K26.157.S21.T1K

Pcs 1
Kg 13
mc 0,214

RICU BISSO/SALEM 3+1

E27 lampholder	K26.157.S31.E27
6,5W filament	K26.157.S31.F1R
8,5W CCT set	K26.157.S31.V1K
11W CCT set	K26.157.S31.T1K

Pcs 1
Kg 14,3
mc 0,214

GIGI/SALEM

E27 lampholder	K26.156.E27
6,5W filament	K26.156.F1R
8,5W CCT set	K26.156.V1K
11W CCT set	K26.156.T1K

Pcs 1
Kg 10,9
mc 0,172

Ø 245

RICU/SALEM

E27 lampholder	K26.157.E27
6,5W filament	K26.157.F1R
8,5W CCT set	K26.157.V1K
11W CCT set	K26.157.T1K

Pcs 1
Kg 11,7
mc 0,18

Ø 245

RICU BISSO/SALEM 2L

E27 lampholder	K26.157.S20.E27
6,5W filament	K26.157.S20.F1R
8,5W CCT set	K26.157.S20.V1K
11W CCT set	K26.157.S20.T1K

Pcs 1
Kg 14,2
mc 0,214

Ø 245

RICU BISSO/SALEM 3L

E27 lampholder	K26.157.S30.E27
6,5W filament	K26.157.S30.F1R
8,5W CCT set	K26.157.S30.V1K
11W CCT set	K26.157.S30.T1K

Pcs 1
Kg 15,2
mc 0,214

Ø 245

GOLIA

MEDIUM SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.


Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		

Q23.131.F1R

MADE IN ITALY



GOLIA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).



Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



Dimensions and weight
Height: 360 mm
Width: 230 mm
Depth: 230 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY: 90% ENERGY SAVING.**

E27 CCT SET(*)



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
	6,5W	800 lm	2700 K	.F1R
	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K

6,5W filament = **60W incandescent**

8,5W CCT

SAVE up to 89%


LED LAMPS




LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



PHOTOMETRIC DATA SAMPLE

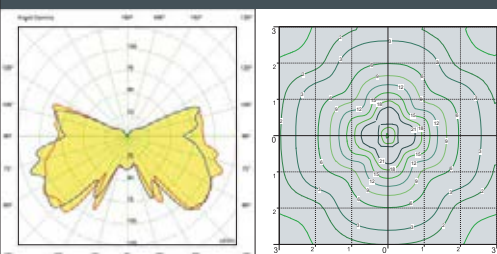

GOLIA lantern clear with Fumagalli Led Lamp CCT set 8,5W.

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GOLIA

MEDIUM SIZE



Q23.111.V1K




Q23.151.V1K



Q23.120.F1R





BISSO/GOLIA

E27 lampholder	Q23.131.E27
6,5W filament	Q23.131.F1R
8,5W CCT set	Q23.131.V1K

Pcs 12
Kg 19
mc 0,225

PORPORA/GOLIA

E27 lampholder	Q23.141.E27
6,5W filament	Q23.141.F1R
8,5W CCT set	Q23.141.V1K

Pcs 1
Kg 4
mc 0,034

MINILOT/GOLIA

E27 lampholder	Q23.111.E27
6,5W filament	Q23.111.F1R
8,5W CCT set	Q23.111.V1K

Pcs 12
Kg 19
mc 0,225

GOLIA

Q23.000

Pcs 1
Kg 1,3
mc 0,018

SICHEM/GOLIA

E27 lampholder	Q23.120.E27
6,5W filament	Q23.120.F1R
8,5W CCT set	Q23.120.V1K

Pcs 12
Kg 19
mc 0,225

MIZAR/GOLIA resin

E27 lampholder	Q23.151.E27
6,5W filament	Q23.151.F1R
8,5W CCT set	Q23.151.V1K

Pcs 1
Kg 3
mc 0,07

IAFET/GOLIA resin

E27 lampholder	Q23.162.E27
6,5W filament	Q23.162.F1R
8,5W CCT set	Q23.162.V1K

Pcs 2
Kg 7,9
mc 0,086

ALOE'R/GOLIA resin

E27 lampholder	Q23.163.E27
6,5W filament	Q23.163.F1R
8,5W CCT set	Q23.163.V1K

Pcs 2
Kg 8,6
mc 0,121

ARTU'/GOLIA

E27 lampholder	Q23.158.E27
6,5W filament	Q23.158.F1R
8,5W CCT set	Q23.158.V1K

Pcs 1
Kg 9,6
mc 0,148

GIGI/GOLIA

E27 lampholder	Q23.156.E27
6,5W filament	Q23.156.F1R
8,5W CCT set	Q23.156.V1K

Pcs 1
Kg 10,9
mc 0,172


RICU/GOLIA

E27 lampholder	Q23.157.E27
6,5W filament	Q23.157.F1R
8,5W CCT set	Q23.157.V1K

Pcs 1
Kg 11,7
mc 0,18

GOLIA
MEDIUM SIZE





GIGI BISSO/GOLIA 2L

E27 lampholder	Q23.156.S20.E27
6,5W filament	Q23.156.S20.F1R
8,5W CCT set	Q23.156.S20.V1K

Pcs 1
Kg 13,5
mc 0,182

Ø 245

GIGI BISSO/GOLIA 3L

E27 lampholder	Q23.156.S30.E27
6,5W filament	Q23.156.S30.F1R
8,5W CCT set	Q23.156.S30.V1K

Pcs 1
Kg 14,7
mc 0,182

Ø 245

GIGI BISSO/GOLIA 2+1

E27 lampholder	Q23.156.S21.E27
6,5W filament	Q23.156.S21.F1R
8,5W CCT set	Q23.156.S21.V1K

Pcs 1
Kg 14,7
mc 0,182

Ø 245

GIGI BISSO/GOLIA 3+1

E27 lampholder	Q23.156.S31.E27
6,5W filament	Q23.156.S31.F1R
8,5W CCT set	Q23.156.S31.V1K

Pcs 1
Kg 16
mc 0,182

Ø 245

RICU BISSO/GOLIA 2L

E27 lampholder	Q23.157.S20.E27
6,5W filament	Q23.157.S20.F1R
8,5W CCT set	Q23.157.S20.V1K

Pcs 1
Kg 14,2
mc 0,214

Ø 245

RICU BISSO/GOLIA 3L

E27 lampholder	Q23.157.S30.E27
6,5W filament	Q23.157.S30.F1R
8,5W CCT set	Q23.157.S30.V1K

Pcs 1
Kg 15,2
mc 0,214

Ø 245

RICU BISSO/GOLIA 2+1

E27 lampholder	Q23.157.S21.E27
6,5W filament	Q23.157.S21.F1R
8,5W CCT set	Q23.157.S21.V1K

Pcs 1
Kg 15,2
mc 0,214

Ø 245

RICU BISSO/GOLIA 3+1

E27 lampholder	Q23.157.S31.E27
6,5W filament	Q23.157.S31.F1R
8,5W CCT set	Q23.157.S31.V1K

Pcs 1
Kg 16,5
mc 0,214

Ø 245

CEFA

MEDIUM SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

NEW	NEW	
6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		



U23.111.F1R

- CE (Conformity)
- CB IEC60730 SCHEME (Safety)
- UV (UV-TREATED)
- CLASS II (DOUBLE INSULATION)
- RESIDENTIAL (House icon)
- 360° (Light distribution)
- FILAMENT LED (Lamp icon)
- RECYCLABLE (Recycling symbol)
- ANTI-SHOCK (Shock symbol)
- TEMPERATURE (+90°/-60°)
- WALL (Wall mounting icon)
- HANGING (Hanging mounting icon)
- POST (Post mounting icon)





CEFA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



CEFA

U23.000 *



Dimensions and weight

Height: 380 mm
Width: 230 mm
Depth: 230 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



E27 CCT SET(*)



100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED max 160 mm		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K

- perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

6,5W filament = **60W incandescent**
 8,5W CCT

SAVE up to 89%


LED LAMPS



LVD EMC ERP


Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



GOLIA lantern clear with Fumagalli Led Lamp CCT set 8,5W.

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

CEFA

MEDIUM SIZE



U23.131.F1R



U23.163.F1R



U23.151.F1R



U23.120.V1K





BISSO/CEFA

E27 lampholder	U23.131.E27
6,5W filament	U23.131.F1R
8,5W CCT set	U23.131.V1K

Pcs 12
Kg 19
mc 0,225

PORPORA/CEFA

E27 lampholder	U23.141.E27
6,5W filament	U23.141.F1R
8,5W CCT set	U23.141.V1K

Pcs 1
Kg 4
mc 0,034

MINILOT/CEFA

E27 lampholder	U23.111.E27
6,5W filament	U23.111.F1R
8,5W CCT set	U23.111.V1K

Pcs 12
Kg 19
mc 0,225

CEFA

U23.000

Pcs 1
Kg 1,3
mc 0,018

SICHEM/CEFA

E27 lampholder	U23.120.E27
6,5W filament	U23.120.F1R
8,5W CCT set	U23.120.V1K

Pcs 12
Kg 19
mc 0,225

MIZAR/CEFA resin

E27 lampholder	U23.151.E27
6,5W filament	U23.151.F1R
8,5W CCT set	U23.151.V1K

Pcs 1
Kg 3
mc 0,07

IAFET/CEFA resin

E27 lampholder	U23.162.E27
6,5W filament	U23.162.F1R
8,5W CCT set	U23.162.V1K

Pcs 2
Kg 7,9
mc 0,086

ALOE'.R/CEFA resin

E27 lampholder	U23.163.E27
6,5W filament	U23.163.F1R
8,5W CCT set	U23.163.V1K

Pcs 2
Kg 8,6
mc 0,121

ARTU'/CEFA

E27 lampholder	U23.158.E27
6,5W filament	U23.158.F1R
8,5W CCT set	U23.158.V1K

Pcs 1
Kg 9,6
mc 0,148

GIGI/CEFA

E27 lampholder	U23.156.E27
6,5W filament	U23.156.F1R
8,5W CCT set	U23.156.V1K

Pcs 1
Kg 10,9
mc 0,172

RICU/CEFA

E27 lampholder	U23.157.E27
6,5W filament	U23.157.F1R
8,5W CCT set	U23.157.V1K

Pcs 1
Kg 11,7
mc 0,18

CEFA

MEDIUM SIZE



MADE IN ITALY



GIGI BISSO/CEFA 2L

E27 lampholder	U23.156.S20.E27
6,5W filament	U23.156.S20.F1R
8,5W CCT set	U23.156.S20.V1K

Pcs 1
Kg 13,5
mc 0,182

Ø 245

GIGI BISSO/CEFA 3L

E27 lampholder	U23.156.S30.E27
6,5W filament	U23.156.S30.F1R
8,5W CCT set	U23.156.S30.V1K

Pcs 1
Kg 14,7
mc 0,182

Ø 245

GIGI BISSO/CEFA 2+1

E27 lampholder	U23.156.S21.E27
6,5W filament	U23.156.S21.F1R
8,5W CCT set	U23.156.S21.V1K

Pcs 1
Kg 14,7
mc 0,182

Ø 245

GIGI BISSO/CEFA 3+1

E27 lampholder	U23.156.S31.E27
6,5W filament	U23.156.S31.F1R
8,5W CCT set	U23.156.S31.V1K

Pcs 1
Kg 16
mc 0,182

Ø 245

RICU BISSO/CEFA 2L

E27 lampholder	U23.157.S20.E27
6,5W filament	U23.157.S20.F1R
8,5W CCT set	U23.157.S20.V1K

Pcs 1
Kg 14,2
mc 0,214

Ø 245

RICU BISSO/CEFA 3L

E27 lampholder	U23.157.S30.E27
6,5W filament	U23.157.S30.F1R
8,5W CCT set	U23.157.S30.V1K

Pcs 1
Kg 15,2
mc 0,214

Ø 245

RICU BISSO/CEFA 2+1

E27 lampholder	U23.157.S21.E27
6,5W filament	U23.157.S21.F1R
8,5W CCT set	U23.157.S21.V1K

Pcs 1
Kg 15,2
mc 0,214

Ø 245

RICU BISSO/CEFA 3+1

E27 lampholder	U23.157.S31.E27
6,5W filament	U23.157.S31.F1R
8,5W CCT set	U23.157.S31.V1K

Pcs 1
Kg 16,5
mc 0,214

Ø 245

IESSE
SMALL SIZE



Half lantern in classic style with E27 lampholder, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as optional with TÜV-CB certified, long-life and efficient LED lamps suitable for outdoor use. Insulation class II, protection rating IP 55.


Mezza lanterna in stile classico con portalamпада E27, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		

M22.000.F1R





IESSE - LANTERN COMPONENTS

IP55



CAGE made of shockproof resin material, UV rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and made of one piece only.

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e realizzato in un pezzo unico.

WALL PLATE made of shockproof white resin reflective material, UV rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

BASE A MURO realizzata in resina antiurto in colore bianco riflettente, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita completa di portalamпада E27.


IESSE

E27 M22.000.E27


6,5W filament M22.000.F1R

8,5W CCT set M22.000.V1K

Pcs 16
Kg 14
mc 0,224



130



IESSE

M22.000



Dimensions and weight

Height: 350 mm
Width: 220 mm
Depth: 130 mm
Weight: 0,82 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



E27 CCT SET(*)



100 - 240 V

*ADD SUFFIX

suitable lamps:
CFL-LED
max 160 mm

E27
lampholder only

.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
	6,5W	800 lm	2700 K	.F1R
	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K

6,5W filament = **60W** incandescent

8,5W CCT

SAVE up to 89%

- Perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

LED LAMPS




Comply with:EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

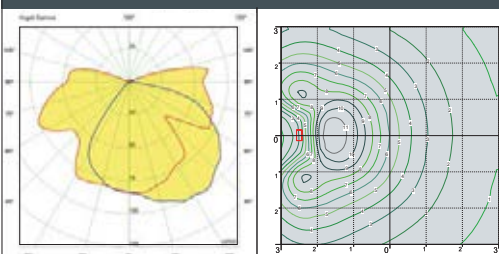

IESSE lantern clear with Fumagalli Filament Led Lamp 6,5W.

height wall mounting: 2mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

DARIA

LARGE SIZE



Half lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. E27 version with support for ballast fixation or supplied with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.


Mezza lanterna in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Versione E27 idonea all'utilizzo di reattori o fornita completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

NEW	NEW	
6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		



M28.000.F1R





DARIA - LANTERN COMPONENTS

IP55



CAGE made of shockproof resin material, UV rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and made of one piece only.

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e realizzato in un pezzo unico.



WALL PLATE made of shockproof white resin reflective material, UV rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

BASE A MURO realizzata in resina antiurto in colore bianco riflettente, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita completa di portalamпада E27.




DARIA

E27 M28.000.E27

6,5W filament M28.000.F1R

11W CCT set M28.000.T1K

Pcs 1
Kg 2,3
mc 0,03



DARIA

M28.000



Dimensions and weight

Height: 515 mm
Width: 286 mm
Depth: 143 mm
Weight: 2,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 FILAMENT



E27 CCT SET(*)



100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K

- Perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

6,5W filament = 60W incandescent

11W CCT = 75W incandescent


SAVE up to 89%

(*) LED LAMPS




Comply with:EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

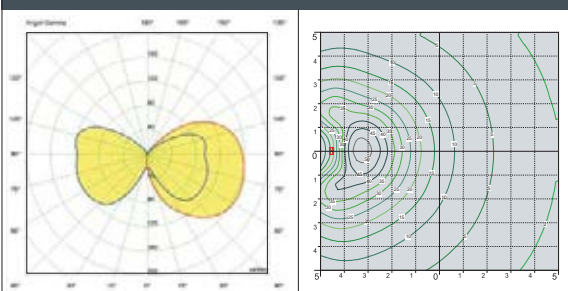

DARIA lantern clear with Fumagalli Led Lamp CCT set 11W.

height wall mounting: 2,5mt
10x10mt area: average 8 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GLOBE 250 CLASSIC

SMALL SIZE



Ø 250 mm PMMA globe, complete with classic globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

*Globo Ø 250 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito anche completo di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



G25.131

6,5W	8,5W	11W	
800 lm	920 lm	1200 lm	
2700 K	2700 K	4000 K	6500 K
+80°C -30°C	90% HUMIDITY	VOLTAGE SURGE RESISTANT	
INDOOR & OUTDOOR USE			

RECYCLABLE	ANTISHOCK	TEMPERATURE	WALL HANGING POST



GLOBE 250 CLASSIC - COMPONENTS

IP55



Ø 250 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 250 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

Clear (X) Opal (Y) Smoked (Z)



GLOBE BASE with classic design, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA con disegno classico realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampada E27.

GLOBE 250 CLASSIC

G25.B25 *



Dimensions and weight

Height: 260 mm
Diameter: 250 mm
Weight: 0,8 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal Smoked

E27 FILAMENT



E27 CCT SET(*)



100 - 240 V

*ADD. SUFFIX

suitable lamps: CFL-LED		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K

6,5W filament = 60W incandescent
8,5W CCT = 75W incandescent
11W CCT = 75W incandescent

SAVE up to 89%

- Perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT. HIGH EFFICIENCY: 90% ENERGY SAVING.**


- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

LED LAMPS





Comply with:EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE



GLOBE 250 CLASSIC clear with Fumagalli Filament Led Lamp 6,5W.

POST height 1mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 250 CLASSIC

SMALL SIZE



G25.158.S20



G25.156.F1R



G25.162.V1K



G25.131.F1R




G25.110.F1R



G25.141.F1R

MADE IN ITALY



MIKROLOT/G250

E27	G25.110.E27
6,5W filament	G25.110.F1R
8,5W CCT set	G25.110.V1K
11W CCT set	G25.110.T1K

Pcs 36
Kg 42
mc 0,829

BISSO/G250

E27	G25.131.E27
6,5W filament	G25.131.F1R
8,5W CCT set	G25.131.V1K
11W CCT set	G25.131.T1K

Pcs 36
Kg 42
mc 0,829

PORPORA/G250

E27	G25.141.E27
6,5W filament	G25.141.F1R
8,5W CCT set	G25.141.V1K
11W CCT set	G25.141.T1K

Pcs 1
Kg 4
mc 0,028

GLOBE 250 CLASSIC

G25.B25

Pcs 2
Kg 1,6
mc 0,025

MIZAR/G250 resin

E27	G25.151.E27
6,5W filament	G25.151.F1R
8,5W CCT set	G25.151.V1K
11W CCT set	G25.151.T1K

Pcs 2
Kg 4
mc 0,078

IAFET.R/G250 resin

E27	G25.162.E27
6,5W filament	G25.162.F1R
8,5W CCT set	G25.162.V1K
11W CCT set	G25.162.T1K

Pcs 2
Kg 6,9
mc 0,092

SICHEM/G250

E27	G25.120.E27
6,5W filament	G25.120.F1R
8,5W CCT set	G25.120.V1K
11W CCT set	G25.120.T1K

Pcs 36
Kg 42
mc 0,829

GIGI BISSO/G250 3L

E27	G25.156.S30.E27
6,5W filament	G25.156.S30.F1R
8,5W CCT set	G25.156.S30.V1K
11W CCT set	G25.156.S30.T1K

Pcs 2
Kg 25,4
mc 0,31

RICU BISSO/G250 3L

E27	G25.157.S30.E27
6,5W filament	G25.157.S30.F1R
8,5W CCT set	G25.157.S30.V1K
11W CCT set	G25.157.S30.T1K

Pcs 2
Kg 27,5
mc 0,339

ALOE'R/G250 resin

E27	G25.163.E27
6,5W filament	G25.163.F1R
8,5W CCT set	G25.163.V1K
11W CCT set	G25.163.T1K

Pcs 2
Kg 7
mc 0,122

ARTU'/G250

E27	G25.158.E27
6,5W filament	G25.158.F1R
8,5W CCT set	G25.158.V1K
11W CCT set	G25.158.T1K

Pcs 2
Kg 17,1
mc 0,186

GIGI/G250

E27	G25.156.E27
6,5W filament	G25.156.F1R
8,5W CCT set	G25.156.V1K
12W CCT set	G25.156.T1K

Pcs 2
Kg 20,1
mc 0,217

GIGI BISSO/G250 2L

E27	G25.156.S20.E27
6,5W filament	G25.156.S20.F1R
8,5W CCT set	G25.156.S20.V1K
11W CCT set	G25.156.S20.T1K

Pcs 2
Kg 23,7
mc 0,27

RICU BISSO/G250 2L

E27	G25.157.S20.E27
6,5W filament	G25.157.S20.F1R
8,5W CCT set	G25.157.S20.V1K
11W CCT set	G25.157.S20.T1K

Pcs 2
Kg 24,8
mc 0,304

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 300 CLASSIC

MEDIUM SIZE



Ø 300 mm PMMA globe, complete with classic globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

Globo Ø 300 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito anche completo di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



G30.162



G30.111

6,5W	8,5W	11W	
800 lm	920 lm	1200 lm	
2700 K	2700 K	4000 K	6500 K
+80°C -30°C	90% HUMIDITY	VOLTAGE SURGE RESISTANT	
INDOOR & OUTDOOR USE			




GLOBE 300 CLASSIC - COMPONENTS

IP55



Ø 300 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 300 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

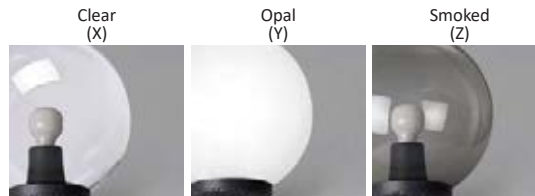

GLOBE BASE with classic design, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA con disegno classico realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampada E27.

GLOBE 300 CLASSIC

G30.B30 *



Dimensions and weight

Height: 310 mm
Diameter: 300 mm
Weight: 1,1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal Smoked

E27 FILAMENT



- Perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT. HIGH EFFICIENCY: 90% ENERGY SAVING.**




E27 CCT SET(*)






- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY: >85% ENERGY SAVING.**

100 - 240 V

*ADD. SUFFIX

suitable lamps:		E27		.E27
CFL-LED		lampholder only		
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
	6,5W	800 lm	2700 K	.F1R
	8,5 W	920 lm	6500 K	.V1K
			4000 K	
			2700 K	
	11 W	1200 lm	6500 K	.T1K
			4000 K	
			2700 K	

 **6,5W filament**
 **8,5W CCT** = **60W incandescent**
 **11W CCT** = **75W incandescent**


SAVE up to 89%

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE



GLOBE 300 CLASSIC clear with Fumagalli Led Lamp CCT set 8,5W.

POST height 2mt
6x6mt area: average 3,5 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 300 CLASSIC

MEDIUM SIZE



G30.157.S20.F1R



G30.131.F1R



G30.111.F1R



G30.120.F1R

MADE IN ITALY

RICU BISSO/G300 2L
E27 G30.157.S20.E27
6,5W filament G30.157.S20.F1R
8,5W CCT set G30.157.S20.V1K
11W CCT set G30.157.S20.T1K
 Pcs 2
 Kg 29,4
 mc 0,366

RICU BISSO/G300 3L
E27 G30.157.S30.E27
6,5W filament G30.157.S30.F1R
8,5W CCT set G30.157.S30.V1K
11W CCT set G30.157.S30.T1K
 Pcs 2
 Kg 31,8
 mc 0,401

BISSO/G300
E27 G30.131.E27
6,5W filament G30.131.F1R
8,5W CCT set G30.131.V1K
11W CCT set G30.131.T1K
 Pcs 24
 Kg 44,2
 mc 0,638

SICHEM/G300
E27 G30.120.E27
6,5W filament G30.120.F1R
8,5W CCT set G30.120.V1K
11W CCT set G30.120.T1K
 Pcs 24
 Kg 44,2
 mc 0,638

GLOBE 300 CLASSIC
 G30.B30
 Pcs 2
 Kg 2,2
 mc 0,059

RICU/G300
E27 G30.157.E27
6,5W filament G30.157.F1R
8,5W CCT set G30.157.V1K
11W CCT set G30.157.T1K
 Pcs 2
 Kg 22,2
 mc 0,274

GIGI/G300
E27 G30.156.E27
6,5W filament G30.156.F1R
8,5W CCT set G30.156.V1K
11W CCT set G30.156.T1K
 Pcs 2
 Kg 20,7
 mc 0,242

ARTU'/G300
E27 G30.158.E27
6,5W filament G30.158.F1R
8,5W CCT set G30.158.V1K
11W CCT set G30.158.T1K
 Pcs 2
 Kg 17,7
 mc 0,211

ALO'E.R./G300
E27 G30.163.E27
6,5W filament G30.163.F1R
8,5W CCT set G30.163.V1K
11W CCT set G30.163.T1K
 Pcs 2
 Kg 8,2
 mc 0,146

MINILOT/G300
E27 G30.111.E27
6,5W filament G30.111.F1R
8,5W CCT set G30.111.V1K
11W CCT set G30.111.T1K
 Pcs 24
 Kg 44,2
 mc 0,638

IAFET.R./G300 resin
E27 G30.162.E27
6,5W filament G30.162.F1R
8,5W CCT set G30.162.V1K
11W CCT set G30.162.T1K
 Pcs 2
 Kg 7,5
 mc 0,117

GLOBE 300 CLASSIC

MEDIUM SIZE



G30.201.R20



G30.132.V1K




G30.201.R30.F1R





G30.201.T1K





MADE IN ITALY

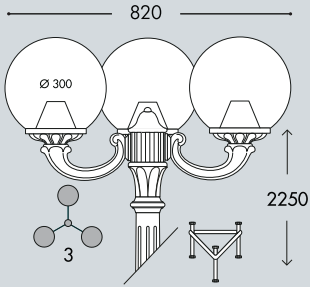
RICU OFIR/G300 3L	
E27	G30.157.R30.E27
6,5W filament	G30.157.R30.F1R
8,5W CCT set	G30.157.R30.V1K
11W CCT set	G30.157.R30.T1K
Pcs 2 Kg 29,9 mc 0,439	
	

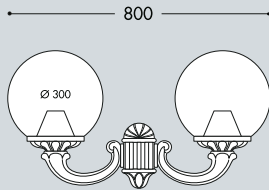
MIRRA/G300	
E27	G30.142.E27
6,5W filament	G30.142.F1R
8,5W CCT set	G30.142.V1K
11W CCT set	G30.142.T1K
Pcs 1 Kg 5,1 mc 0,077	
	

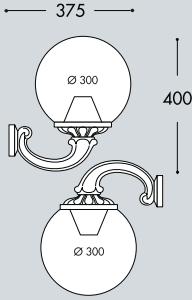OFIR/G300	
E27	G30.132.E27
6,5W filament	G30.132.F1R
8,5W CCT set	G30.132.V1K
11W CCT set	G30.132.T1K
Pcs 2 Kg 4,6 mc 0,077	
	

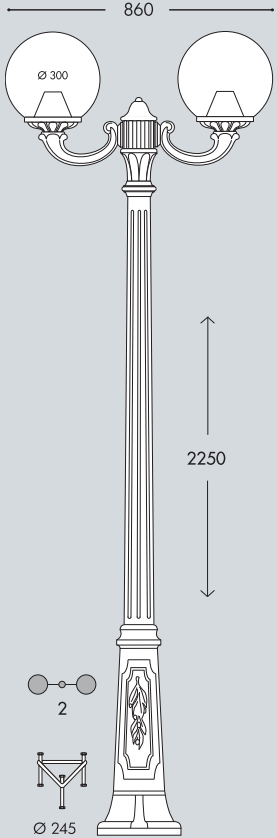RICU OFIR/G300 2L	
E27	G30.157.R20.E27
6,5W filament	G30.157.R20.F1R
8,5W CCT set	G30.157.R20.V1K
11W CCT set	G30.157.R20.T1K
Pcs 2 Kg 26,3 mc 0,379	
	

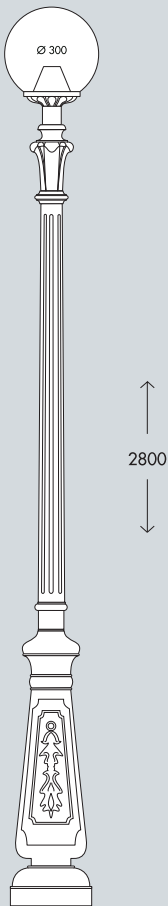NEBO/G300	
E27	G30.201.E27
6,5W filament	G30.201.F1R
8,5W CCT set	G30.201.V1K
11W CCT set	G30.201.T1K
Pcs 1 Kg 22,2 mc 0,163	
	

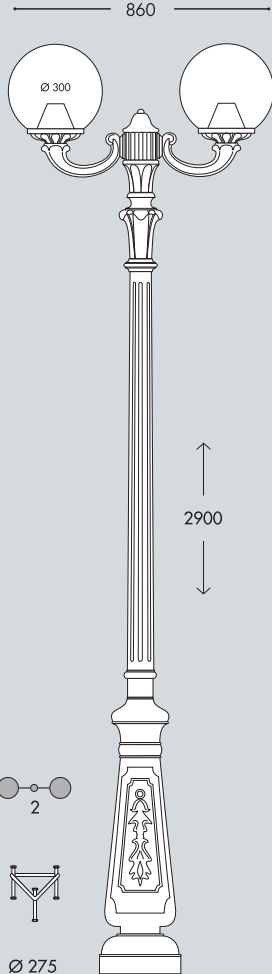NEBO OFIR/G300 2L	
E27	G30.201.R20.E27
6,5W filament	G30.201.R20.F1R
8,5W CCT set	G30.201.R20.V1K
11W CCT set	G30.201.R20.T1K
Pcs 1 Kg 25,7 mc 0,208	
	

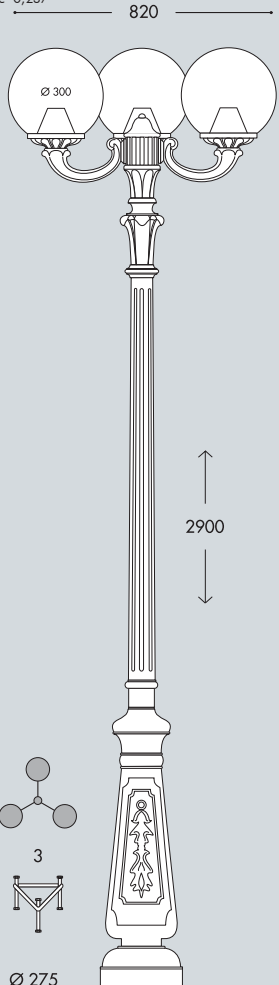NEBO OFIR/G300 3L	
E27	G30.201.R30.E27
6,5W filament	G30.201.R30.F1R
8,5W CCT set	G30.201.R30.V1K
11W CCT set	G30.201.R30.T1K
Pcs 1 Kg 30,8 mc 0,237	
	

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 250 MODERN

SMALL SIZE



Ø 250 mm PMMA globe, complete with modern globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

Globo Ø 250 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito anche completo di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.


6,5W	8,5W	11W
800 lm	920 lm	1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT

INDOOR & OUTDOOR USE



G26.114






GLOBE 250 MODERN - COMPONENTS

IP55



Ø 250 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 250 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

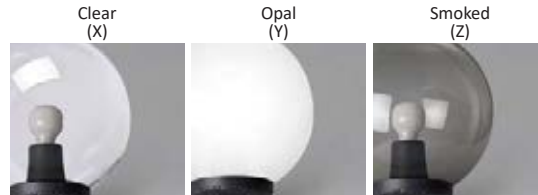

GLOBE BASE with modern design, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA con disegno moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalamпада E27.

GLOBE 250 MODERN

G26.B26 *



Dimensions and weight

Height: 260 mm
Diameter: 250 mm
Weight: 0,8 Kg

Moulded colours:

Black White

Diffuser PMMA:

Clear Opal Smoked

E27 FILAMENT



- Perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

E27 CCT SET(*)



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps:		E27		.E27
CFL-LED		lampholder only		
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K	.V1K
			4000 K	
			2700 K	
CCT SET LED E27	11 W	1200 lm	6500 K	.T1K
			4000 K	
			2700 K	

6,5W filament = 60W incandescent
8,5W CCT = 75W incandescent
11W CCT = 75W incandescent

SAVE up to 89%

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE



GLOBE 250 MODERN clear with Fumagalli Filament Led Lamp 6,5W.

POST height 1mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GLOBE 250 MODERN

SMALL SIZE




MADE IN ITALY



NARDO /G250

E27 lampholder	G26.240.E27
6,5W filament	G26.240.F1R
8,5W CCT set	G26.240.V1K
11W CCT set	G26.240.T1K


Pcs 36
Kg 32,9
mc 0,829

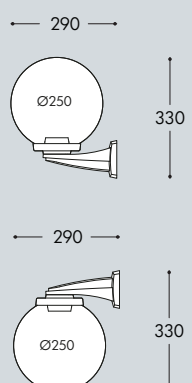

DISMA /G250

E27 lampholder	G26.114.E27
6,5W filament	G26.114.F1R
8,5W CCT set	G26.114.V1K
11W CCT set	G26.114.T1K


Pcs 36
Kg 36,5
mc 0,829



GIAFFA /G250

E27 lampholder	G26.242.E27 resin
6,5W filament	G26.242.F1R resin
8,5W CCT set	G26.242.V1K resin
11W CCT set	G26.242.T1K resin


Pcs 2
Kg 4
mc 0,078

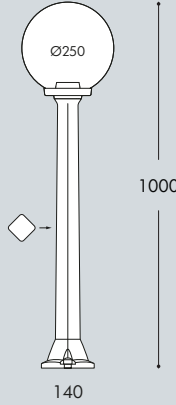

GLOBE 250 MODERN

G26.B26.E27


Pcs 2
Kg 1,6
mc 0,025



ARGO 300/G250 *

E27 lampholder	G26.255.E27 resin
6,5W filament	G26.255.F1R resin
8,5W CCT set	G26.255.V1K resin
11W CCT set	G26.255.T1K resin

Pcs 2
Kg 4,3
mc 0,061




*available colour: black

ARGO 500/G250 *

E27 lampholder	G26.256.E27 resin
6,5W filament	G26.256.F1R resin
8,5W CCT set	G26.256.V1K resin
11W CCT set	G26.256.T1K resin

Pcs 2
Kg 5
mc 0,070

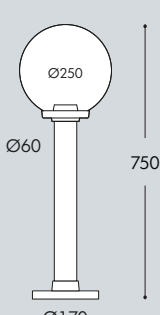


*available colour: black

ARGO 800/G250 *

E27 lampholder	G26.257.E27 resin
6,5W filament	G26.257.F1R resin
8,5W CCT set	G26.257.V1K resin
11W CCT set	G26.257.T1K resin

Pcs 2
Kg 6,1
mc 0,093

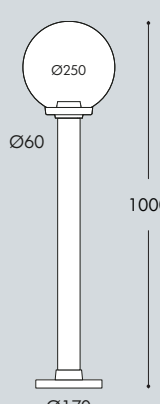


*available colour: black

FEBO 1500/G250 *

E27 lampholder	G26.263.E27
6,5W filament	G26.263.F1R
8,5W CCT set	G26.263.V1K
11W CCT set	G26.263.T1K

Pcs 2
Kg 11,4
mc 0,173

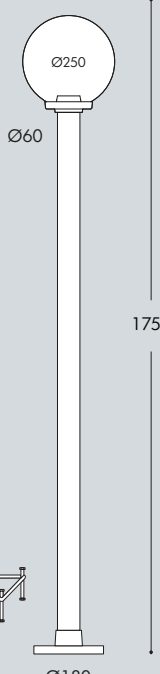

*available colour: black

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 300 MODERN

MEDIUM SIZE



Ø 300 mm PMMA globe, complete with modern globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.


Globo Ø 300 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito anche completo di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		



G31.240

MADE IN ITALY




GLOBE 300 MODERN - COMPONENTS

IP55



Ø 300 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 300 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

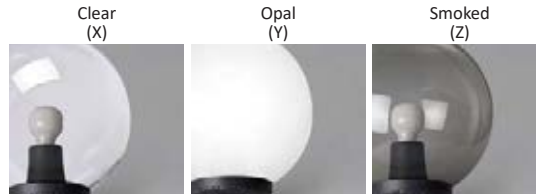


GLOBE BASE with modern design, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA con disegno moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampana E27.

GLOBE 300 MODERN

G31.B31 *



Dimensions and weight

Height: 310 mm
Diameter: 300 mm
Weight: 1,1 Kg

Moulded colours:

Black White

Diffuser PMMA:

Clear Opal Smoked

E27 FILAMENT



- Perfect **MATCHING WITH CLASSIC LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

E27 CCT SET(*)



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX

suitable lamps:		E27		.E27	
CFL-LED		lampholder only			
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.		
	6,5W	800 lm	2700 K	.F1R	
	8,5 W	920 lm	4000 K	.V1K	
	11 W	1200 lm	6500 K	.T1K	
	6,5W filament			= 60W incandescent	
	8,5W CCT			= 75W incandescent	
	11W CCT			= 75W incandescent	


SAVE up to 89%

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE



GLOBE 300 MODERN clear with Fumagalli Led Lamp CCT set 8,5W.


POST height 2mt
6x6mt area: average 3,5 lux

The photometric data for all the versions are available upon request or on our website.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GLOBE 300 MODERN

MEDIUM SIZE

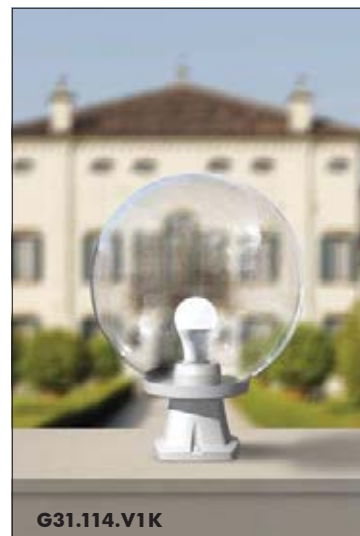

MADE IN ITALY



NARDO /G300

E27 lampholder	G31.240.E27
6,5W filament	G31.240.F1R
8,5W CCT set	G31.240.V1K
11W CCT set	G31.240.T1K

Pcs 24
Kg 39,4
mc 0,638

DISMA /G300

E27 lampholder	G31.114.E27
6,5W filament	G31.114.F1R
8,5W CCT set	G31.114.V1K
11W CCT set	G31.114.T1K

Pcs 24
Kg 40,6
mc 0,638

GIAFFA /G300

E27 lampholder	G31.242.E27
6,5W filament	G31.242.F1R
8,5W CCT set	G31.242.V1K
11W CCT set	G31.242.T1K

Pcs 2
Kg 4,6
mc 0,117

GLOBE 300 MODERN

G31.B31.E27

Pcs 2
Kg 2,2
mc 0,059

ARGO 300/G300 *

E27 lampholder	G31.255.E27 resin
6,5W filament	G31.255.F1R resin
8,5W CCT set	G31.255.V1K resin
11W CCT set	G31.255.T1K resin

Pcs 2
Kg 4,9
mc 0,08

*available colour: black

ARGO 800/G300 *

E27 lampholder	G31.257.E27 resin
6,5W filament	G31.257.F1R resin
8,5W CCT set	G31.257.V1K resin
11W CCT set	G31.257.T1K resin

Pcs 2
Kg 6,7
mc 0,117

*available colour: black

FEBO 1500/G300 *

E27 lampholder	G31.263.E27
6,5W filament	G31.263.F1R
8,5W CCT set	G31.263.V1K
11W CCT set	G31.263.T1K

Pcs 2
Kg 12
mc 0,207

*available colour: black

ENEА 2000/G300 *

E27 lampholder	G31.264.E27
6,5W filament	G31.264.F1R
8,5W CCT set	G31.264.V1K
11W CCT set	G31.264.T1K

ENEА 2400/G300 *

E27 lampholder	G31.265.E27
6,5W filament	G31.265.F1R
8,5W CCT set	G31.265.V1K
11W CCT set	G31.265.T1K

Pcs 2
Kg 18,2
mc 0,281

Pcs 2
Kg 22,2
mc 0,323

*available colour: black

ARGO 500/G300 *

E27 lampholder	G31.256.E27 resin
6,5W filament	G31.256.F1R resin
8,5W CCT set	G31.256.V1K resin
11W CCT set	G31.256.T1K resin

Pcs 2
Kg 5,6
mc 0,094

*available colour: black

ARGO 800/G300 *

E27 lampholder	G31.257.E27 resin
6,5W filament	G31.257.F1R resin
8,5W CCT set	G31.257.V1K resin
11W CCT set	G31.257.T1K resin

Pcs 2
Kg 6,7
mc 0,117

*available colour: black

FEBO 1500/G300 *

E27 lampholder	G31.263.E27
6,5W filament	G31.263.F1R
8,5W CCT set	G31.263.V1K
11W CCT set	G31.263.T1K

Pcs 2
Kg 12
mc 0,207

*available colour: black



URBAN CLASSIC

NOEMI HIGH POWER LED

LARGE SIZE



Hexagonal lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna esagonale realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.***

E35.121.Q1K

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500

CCT SETTABLE

3000 K 4000 K

SDCM < 6

CE	CB IECEE CB SCHEME	UV UVTREATED	CLASS II DOUBLE INSULATION	PUBLIC	RESIDENTIAL
RECYCLABLE	ANTI-SHOCK	TEMPERATURE +90° -60°	WALL	POST	HANGING



NOEMI HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

***TETTO** realizzato in resina antiurto. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

***SOFFITTO** riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

***DIFFUSORE** in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

NOEMI HIGH POWER LED

E35.000 *



Dimensions and weight

Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,9 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,110

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27	15 W	1690 lm	4000 K 3000 K	.R1K
	30 W	3620 lm	4000 K 3000 K	.Q1K
LED E27	50W	6550 lm	4000 K	.H1L
			3000 K	.H1R

PHOTOMETRIC DATA SAMPLE



NOEMI E27 LED HIGH POWER 30W

POST height 3mt
10x10mt area: average 15 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (15 and 30W only)

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

NOEMI E27

LARGE SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.

6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°C	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		



E35.000.F1R





NOEMI E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e idoneo per il fissaggio dei reattori.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



Dimensions and weight
Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure: CxS = m² 0,110

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 VERSION

100 - 240 V

*ADD. SUFFIX



E27 lantern supplied as an option with TÜV-CB certified, long-life, efficient LED lamps suitable for outdoor use.

Suitable lamps: CFL-LED-SON-HQI MAX 70W		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
	6,5W	800 lm	2700 K	.F1R
	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
	11 W	1200 lm	4000 K 2700 K	.T1K

LED LAMPS

LVD EMC ERP

Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.


CCT SETTABLE LED LAMP(*)

6500K - 920lm
4000K - 920lm
2700K - 840lm

CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

PHOTOMETRIC DATA SAMPLE

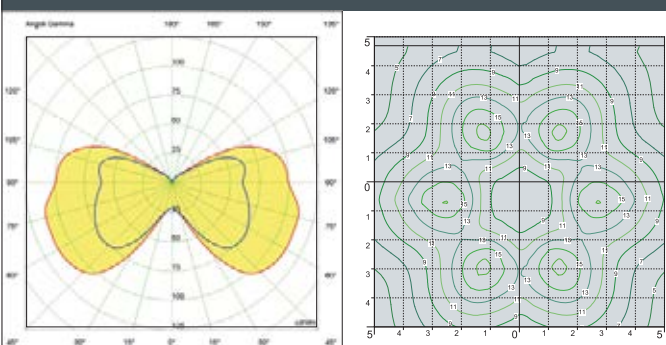

NOEMI E27 clear SON 70W.

POST height 3mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

NOEMI

LARGE SIZE



E35.157.Q1K



E35.132.Q1K



E35.121.Q1K



E35.132.Q1K



E35.113.R1K



E35.162.R1K





OFIR/NOEMI
E35.132

Pcs 1
Kg 4,6
mc 0,048

EVA/NOEMI
E35.181

Pcs 1
Kg 10,9
mc 0,168

NOEMI
E35.000

Pcs 1
Kg 3,9
mc 0,043

LOT/NOEMI
E35.113

Pcs 1
Kg 4,8
mc 0,061

MIRRA/NOEMI
E35.142

Pcs 1
Kg 9,5
mc 0,083

SICHEM/NOEMI
E35.121

Pcs 1
Kg 4,4
mc 0,048

RICU/NOEMI
E35.157

Pcs 2
Kg 27,8
mc 0,310

GIGI/NOEMI
E35.156

Pcs 2
Kg 26,3
mc 0,278

ARTU'/NOEMI
E35.158

Pcs 2
Kg 23,3
mc 0,247

ALOE'.R/NOEMI
E35.163 resin

Pcs 2
Kg 12,8
mc 0,182

IAFET.R/NOEMI
E35.162 resin

Pcs 2
Kg 13,1
mc 0,153

NEBO/NOEMI

LARGE SIZE





NEBO OFIR/NOEMI 2L
E35.201.R20

Pcs 1
Kg 31,9
mc 0,268

NEBO OFIR/NOEMI 3L
E35.201.R30

Pcs 1
Kg 35,8
mc 0,342

NEBO/NOEMI
E35.201

Pcs 1
Kg 24,9
mc 0,196

NEBO OFIR/NOEMI 2L
E35.201.R20

Pcs 1
Kg 31,9
mc 0,268

NEBO OFIR/NOEMI 3L
E35.201.R30

Pcs 1
Kg 35,8
mc 0,342

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

TABOR/NOEMI

LARGE SIZE



E35.204.R20.Q1K



E35.204.R30.Q1K



E35.204.Q1K



MADE IN ITALY



TABOR OFIR/NOEMI 2L
E35.204.R20

Pcs 1
Kg 36,4
mc 0,295

TABOR OFIR/NOEMI 3L
E35.204.R30

Pcs 1
Kg 39,5
mc 0,369

TABOR/NOEMI
E35.204

Pcs 1
Kg 29,4
mc 0,223

Ø 275

TABOR OFIR/NOEMI 2L
E35.204.R20

Pcs 1
Kg 36,4
mc 0,295

Ø 275


TABOR OFIR/NOEMI 3L
E35.204.R30

Pcs 1
Kg 39,5
mc 0,369

Ø 275

HOREB/NOEMI

LARGE SIZE

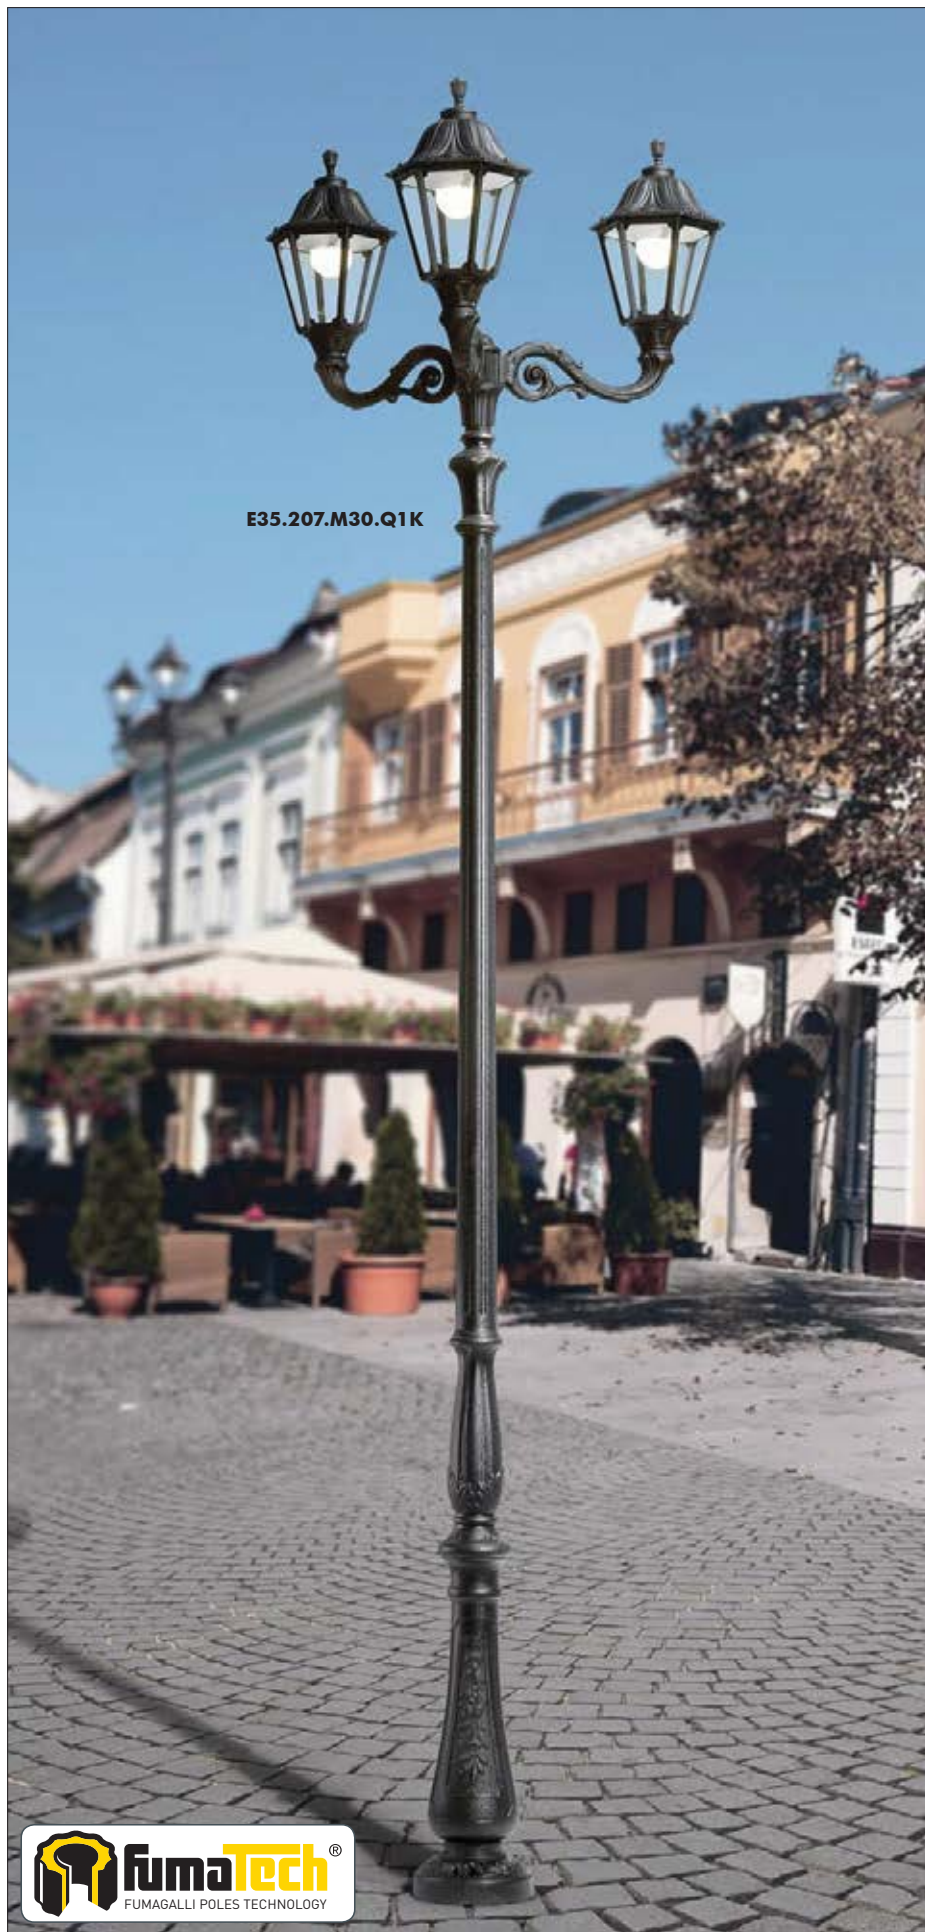

E35.207.M30.Q1K



E35.171.Q1K



E35.207.M21.Q1K



MADE IN ITALY



HOREB ADAM/NOEMI 1L
E35.207.M10

Pcs 1
Kg 33,8
mc 0,280

ADAM/NOEMI
E35.171

Pcs 1
Kg 5,3
mc 0,083

HOREB ADAM/NOEMI 3+1
E35.207.M31

Pcs 1
Kg 48
mc 0,476

HOREB/NOEMI
E35.207

Pcs 1
Kg 31,9
mc 0,249

HOREB ADAM/NOEMI 2+1
E35.207.M21

Pcs 1
Kg 43
mc 0,404

HOREB ADAM/NOEMI 3L
E35.207.M30


Pcs 1
Kg 44,1
mc 0,414

HOREB ADAM/NOEMI 2L
E35.207.M20

Pcs 1
Kg 38,8
mc 0,342

KARMELO 3000/NOEMI

LARGE SIZE

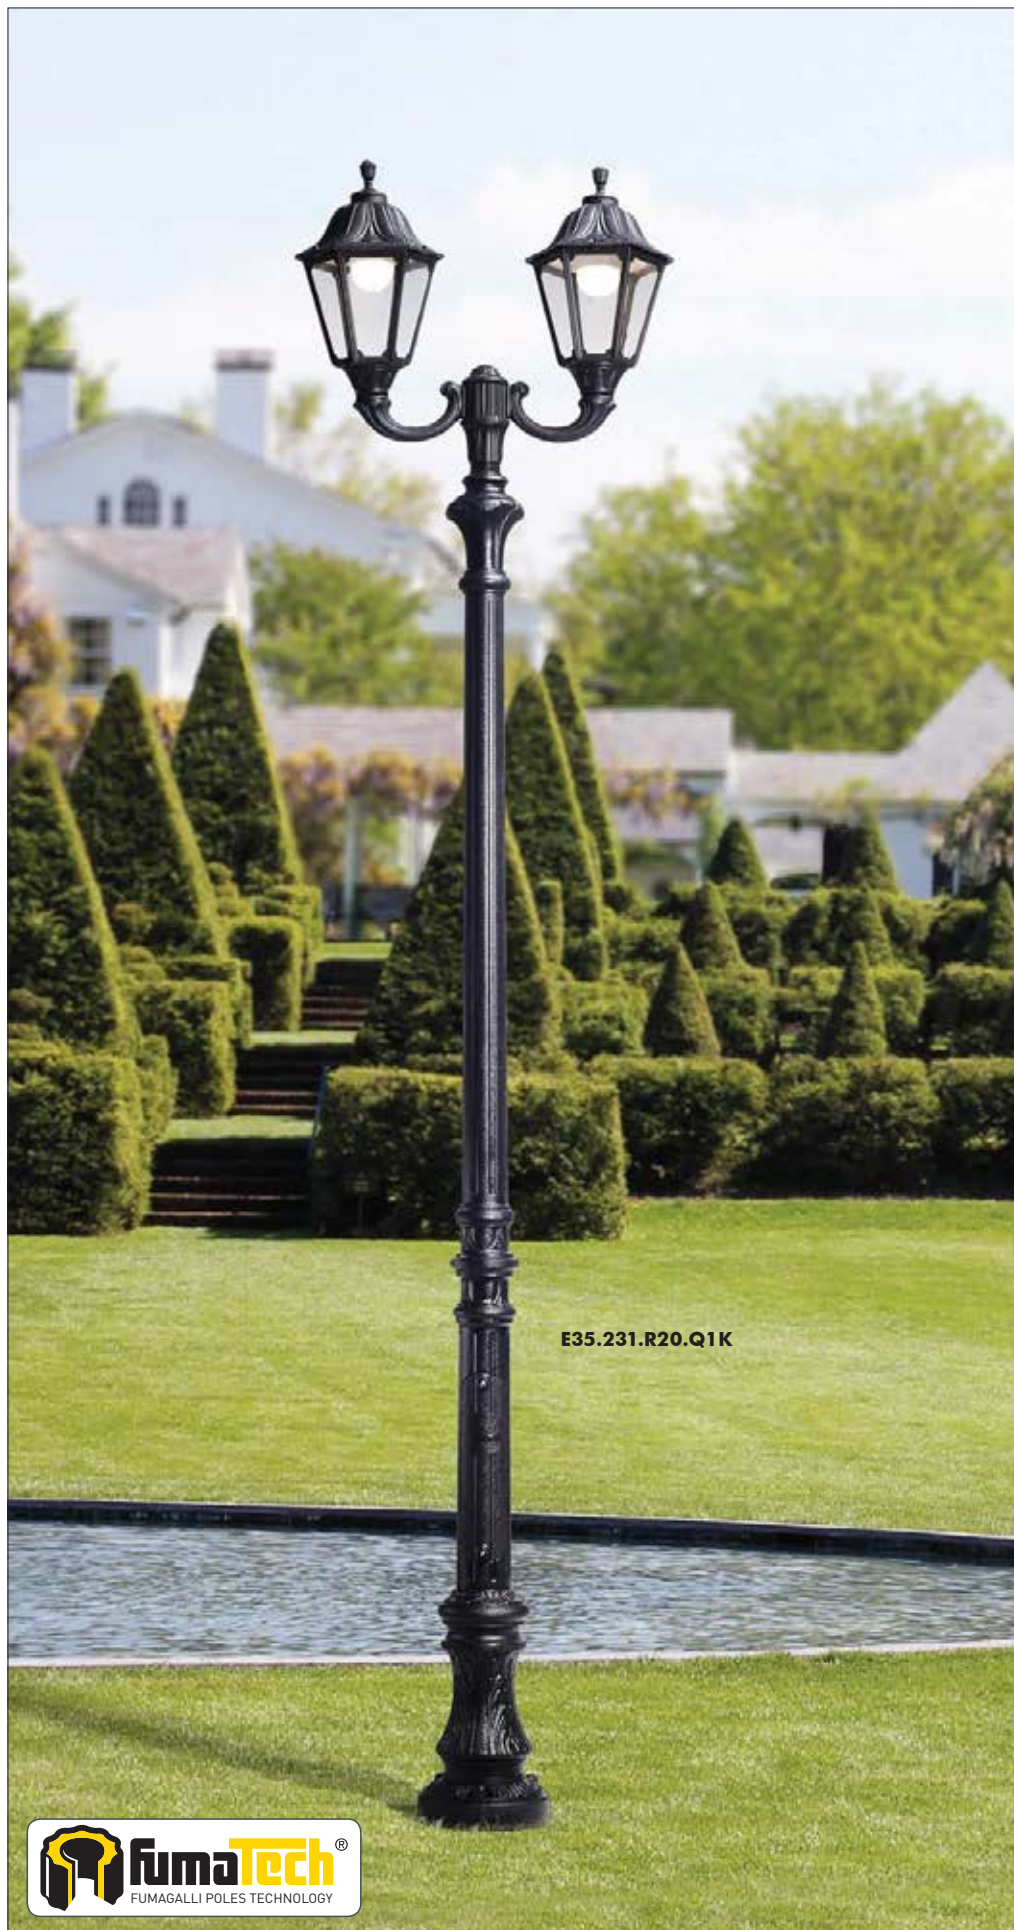



KARMEL 3000 OFIR/NOEMI 2L
E35.231.R20

Pcs 1
Kg 36,4
mc 0,295

KARMEL 3000 OFIR/NOEMI 3L
E35.231.R30

Pcs 1
Kg 39,5
mc 0,369

KARMEL 3000/NOEMI
E35.231

Pcs 1
Kg 29,4
mc 0,223

KARMEL 3000 OFIR/NOEMI 2L
E35.231.R20

Pcs 1
Kg 36,4
mc 0,295

KARMEL 3000 OFIR/NOEMI 3L
E35.231.R30

Pcs 1
Kg 39,5
mc 0,369

KARMEL 3500-4000/NOEMI

LARGE SIZE



E35.234.M21.Q1K



E35.171.Q1K



E35.234.Q1K



MADE IN ITALY



KARMEL 3500 ADAM/NOEMI 1L	KARMEL 4000 ADAM/NOEMI 1L
E35.234.M10	E35.237.M10
Pcs 1 Kg 33,8 mc 0,280	Pcs 1 Kg 36,3 mc 0,287

KARMEL 3500 ADAM/NOEMI 2+1	KARMEL 4000 ADAM/NOEMI 2+1
E35.234.M21	E35.237.M21
Pcs 1 Kg 43 mc 0,404	Pcs 1 Kg 45,5 mc 0,431

KARMEL 3500 ADAM/NOEMI 3L	KARMEL 4000 ADAM/NOEMI 3L
E35.234.M30	E35.237.M30
Pcs 1 Kg 44,1 mc 0,414	Pcs 1 Kg 46,6 mc 0,441

KARMEL 3500/NOEMI
E35.234
Pcs 1 Kg 31,9 mc 0,249

KARMEL 3500 ADAM/NOEMI 3+1	KARMEL 4000 ADAM/NOEMI 3+1
E35.234.M31	E35.237.M31
Pcs 1 Kg 48 mc 0,476	Pcs 1 Kg 50,5 mc 0,503

KARMEL 3500 ADAM/NOEMI 2L	KARMEL 4000 ADAM/NOEMI 2L
E35.234.M20	E35.237.M20
Pcs 1 Kg 38,8 mc 0,342	Pcs 1 Kg 41,3 mc 0,369

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SILOE HIGH POWER LED

LARGE SIZE



E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90%
HUMIDITY

VOLTAGE SURGE RESISTANT



DRIVER SILICONE PROTECTION



Hexagonal lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient E27 high power LED lamp included. Insulation class II, Protection rating IP55.

Lantern a esagonale realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita completa di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

K35.132.Q1K



CCT SETTABLE

3000 K 4000 K

SDCM < 6



SILOE HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SILOE HIGH POWER LED

K35.000 *



Dimensions and weight

Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,9 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,113

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal




HIGH POWER LED





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
(*) 	15 W	1690 lm	4000 K	.R1K
			3000 K	
	30 W	3620 lm	4000 K	.Q1K
			3000 K	
	50W	6550 lm	4000 K	.H1L
			3000 K	

PHOTOMETRIC DATA SAMPLE



SILOE E27 LED HIGH POWER 30W

POST height 3mt
10x10mt area: average 15 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (15 and 30W only)

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SILOE E27

LARGE SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.

6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		



K35.000.F1R





SILOE E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SILOE E27

K35.000 *



Dimensions and weight

Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,113

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 VERSION

100 - 240 V

*ADD. SUFFIX



Suitable lamps: CFL-LED-SON-HQI MAX 70W		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27 (*)	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
CCT SET LED E27 (*)	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K


E27 lantern supplied as an option with TÜV-CB certified, long-life, efficient LED lamps suitable for outdoor use.

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE

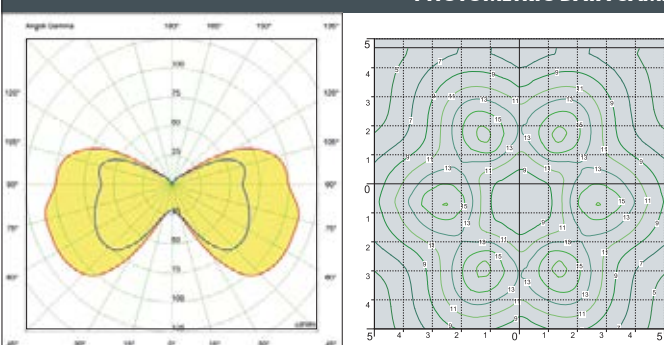

SILOE E27 clear SON 70W.

POST height 3mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SILOE

LARGE SIZE



K35.157.Q1K



K35.113.Q1K



K35.121.Q1K



K35.132.Q1K



K35.162.Q1K

MADE IN ITALY



OFIR/SILOE
K35.132

Pcs 1
Kg 4,6
mc 0,048

EVA/SILOE
K35.181

Pcs 1
Kg 10,9
mc 0,168

SILOE
K35.000

Pcs 1
Kg 3,9
mc 0,043

LOT/SILOE
K35.113

Pcs 1
Kg 4,8
mc 0,061

MIRRA/SILOE
K35.142

Pcs 1
Kg 9,5
mc 0,083

SICHEM/SILOE
K35.121

Pcs 1
Kg 4,4
mc 0,048

RICU/SILOE
K35.157

Pcs 2
Kg 27,8
mc 0,310

GIGI/SILOE
K35.156

Pcs 2
Kg 26,3
mc 0,278

ARTU'/SILOE
K35.158

Pcs 2
Kg 23,3
mc 0,247

ALOE'.R/SILOE
K35.163 resin

Pcs 2
Kg 12,8
mc 0,182

IAFET.R/SILOE
K35.162 resin

Pcs 2
Kg 13,1
mc 0,153

NEBO/SILOE

LARGE SIZE



K35.201.R20.Q1K



K35.201.Q1K



NEBO OFIR/SILOE 2L
K35.201.R20

Pcs 1
Kg 31,9
mc 0,268

860

2630

2

NEBO OFIR/SILOE 3L
K35.201.R30

Pcs 1
Kg 35,8
mc 0,342

910

2630

3

NEBO/SILOE
K35.201

Pcs 1
Kg 24,9
mc 0,196

350

2970

Ø 275

NEBO OFIR/SILOE 2L
K35.201.R20

Pcs 1
Kg 31,9
mc 0,268

860

3070

2

Ø 275

NEBO OFIR/SILOE 3L
K35.201.R30

Pcs 1
Kg 35,8
mc 0,342

910

3070

3

Ø 275

TABOR/SILOE

LARGE SIZE



K35.204.R20.Q1K



K35.204.R20.Q1K



K35.204.Q1K

MADE IN ITALY



TABOR OFIR/SILOE 2L
K35.204.R20

Pcs 1
Kg 36,4
mc 0,295

TABOR OFIR/SILOE 3L
K35.204.R30

Pcs 1
Kg 39,5
mc 0,369

TABOR/SILOE
K35.204

Pcs 1
Kg 29,4
mc 0,223

TABOR OFIR/SILOE 2L
K35.204.R20


Pcs 1
Kg 36,4
mc 0,295

TABOR OFIR/SILOE 3L
K35.204.R30

Pcs 1
Kg 39,5
mc 0,369

HOREB/SILOE

LARGE SIZE

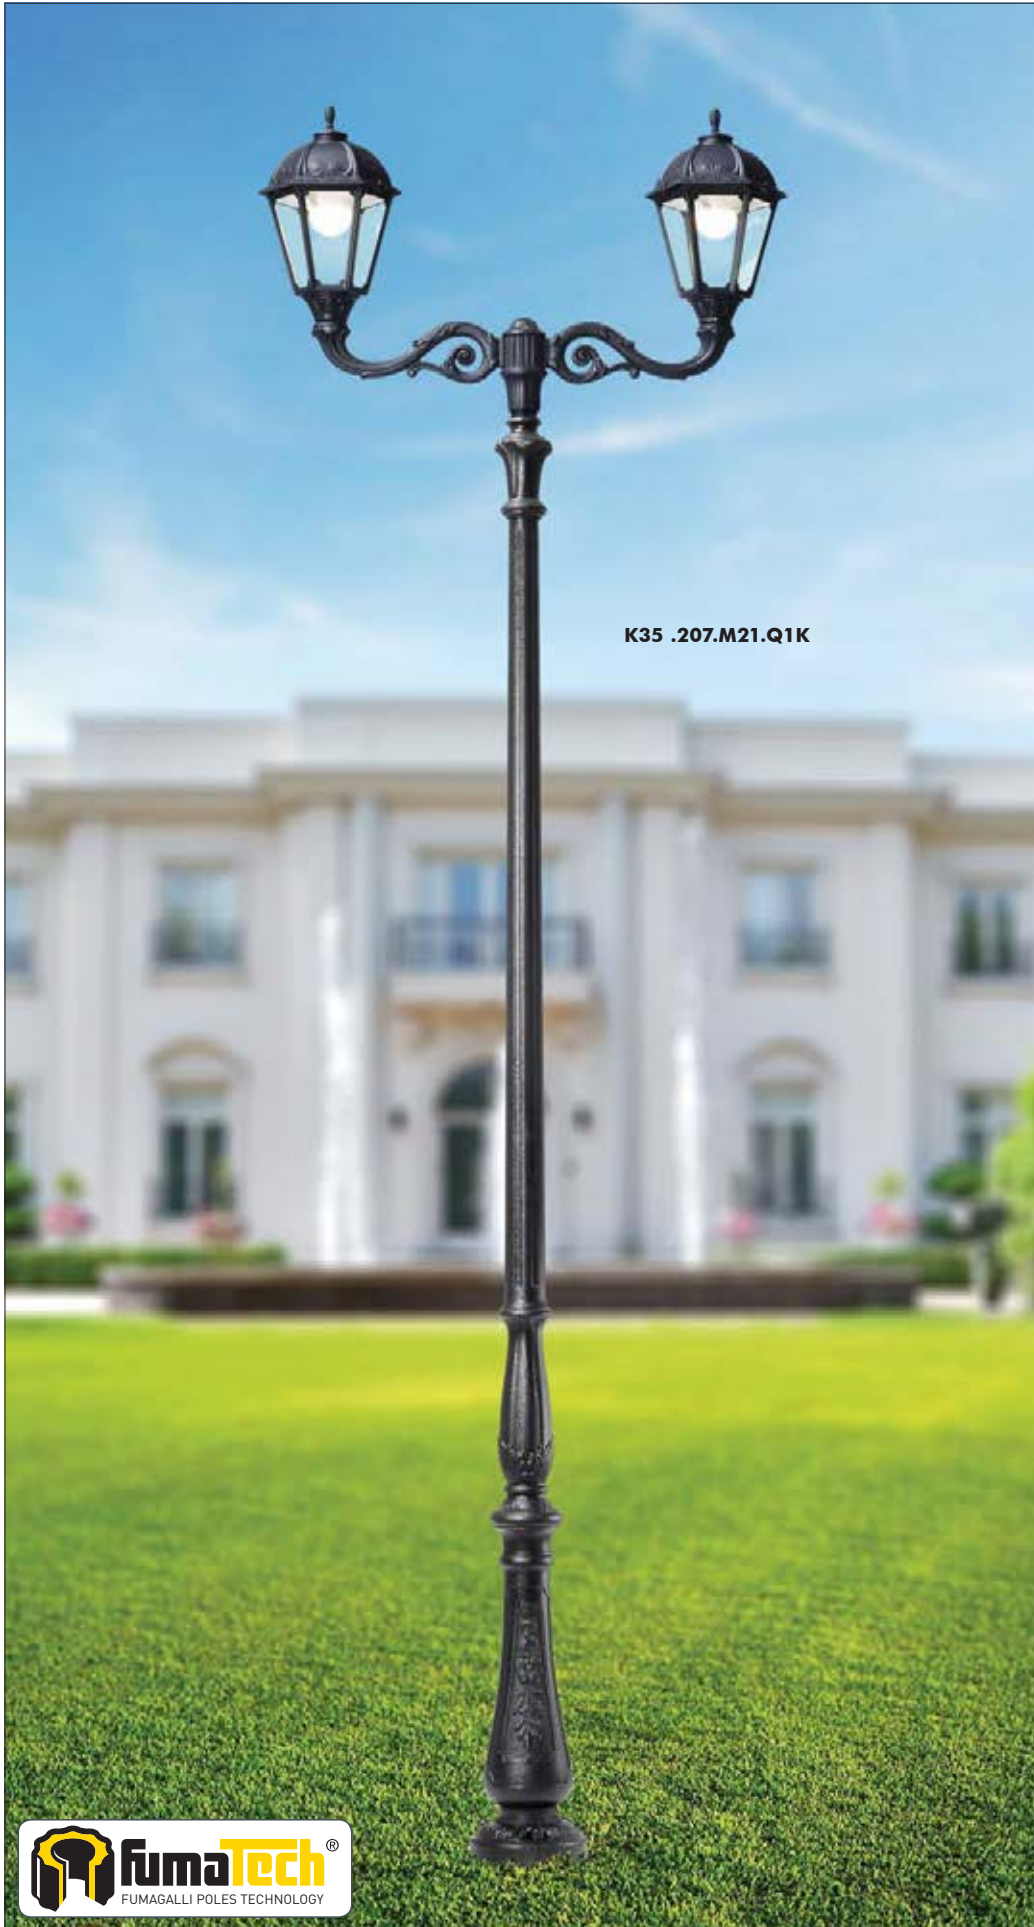

K35 .207.M21.Q1K



K35.171.Q1K



K35 .207.Q1K



HOREB ADAM/SILOE 1L
K35.207.M10

Pcs 1
Kg 33,8
mc 0,280

720

3630

ADAM/SILOE
K35.171

Pcs 1
Kg 5,3
mc 0,083

610

700

610

HOREB ADAM/SILOE 3+1
K35.207.M31

Pcs 1
Kg 48
mc 0,476

1230

4180

3+1

HOREB/SILOE
K35.207

Pcs 1
Kg 31,9
mc 0,249

350

3970

Ø 275

HOREB ADAM/SILOE 3L
K35.207.M30

Pcs 1
Kg 43
mc 0,414

1230

4120

Ø 275

3

HOREB ADAM/SILOE 2+1
K35.207.M21

Pcs 1
Kg 44,1
mc 0,404

1240

4180

2+1

HOREB ADAM/SILOE 2L
K35.207.M20

Pcs 1
Kg 38,8
mc 0,342


1240

4120

2

KARMEL 3000/SILOE


LARGE SIZE

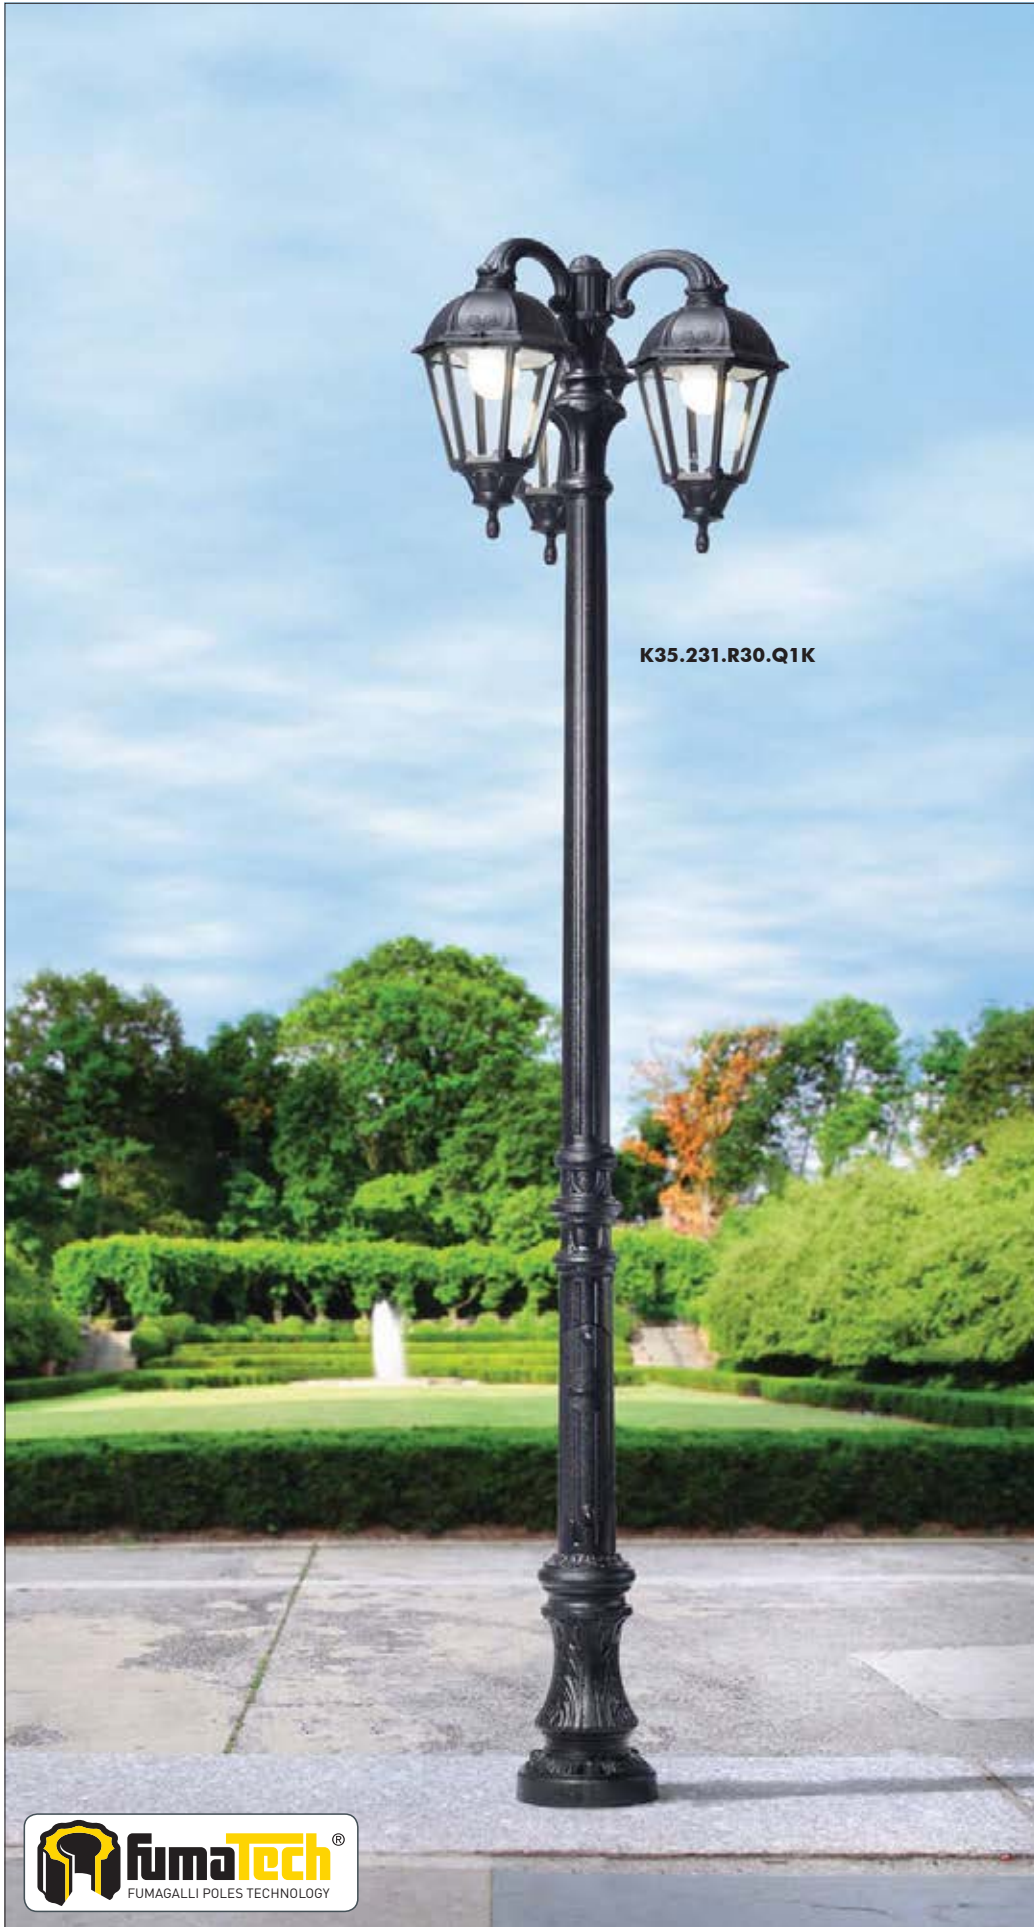

K35.231.R30.Q1K



K35.231.R20.Q1K

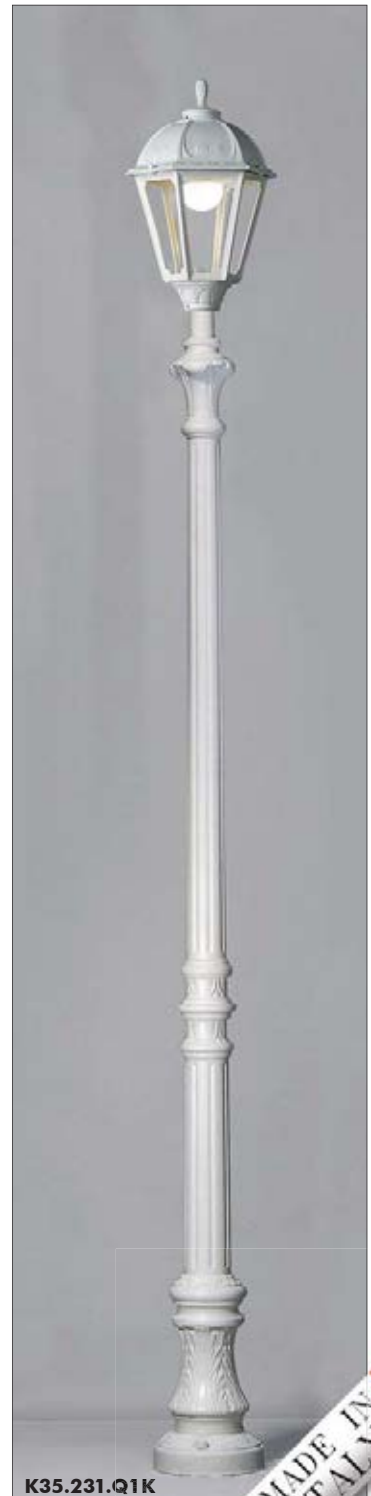

K35.231.Q1K

MADE IN ITALY



KARMEL 3000 OFIR/SILOE 2L
K35.231.R20

Pcs 1
Kg 36,4
mc 0,295

KARMEL 3000 OFIR/SILOE 3L
K35.231.R30

Pcs 1
Kg 39,5
mc 0,369

KARMEL 3000/SILOE
K35.231

Pcs 1
Kg 29,4
mc 0,223

KARMEL 3000 OFIR/SILOE 2L
K35.231.R20

Pcs 1
Kg 36,4
mc 0,295

KARMEL 3000 OFIR/SILOE 3L
K35.231.R30

Pcs 1
Kg 39,5
mc 0,369

KARMEL 3500-4000/SILOE

LARGE SIZE



K35.234.M30.Q1K



K35.171.Q1K



K35 .234.Q1K

MADE IN ITALY



KARMEL 3500 ADAM/SILOE 1L	KARMEL 4000 ADAM/SILOE 1L
K35.234.M10	K35.237.M10
Pcs 1 Kg 33,8 mc 0,280	Pcs 1 Kg 36,3 mc 0,287
720	
1	

KARMEL 3500/SILOE	
K35.234	
Pcs 1 Kg 31,9 mc 0,249	
350	
3970	
Ø 275	

KARMEL 3500 ADAM/SILOE 2+1	KARMEL 4000 ADAM/SILOE 2+1
K35.234.M21	K35.237.M21
Pcs 1 Kg 43 mc 0,404	Pcs 1 Kg 45,5 mc 0,431
1240	
4180 4680	
2+1	
Ø 275	

KARMEL 3500 ADAM/SILOE 3L	KARMEL 4000 ADAM/SILOE 3L
K35.234.M30	K35.237.M30
Pcs 1 Kg 44,1 mc 0,414	Pcs 1 Kg 46,6 mc 0,441
1230	
4120 4620	
3	

KARMEL 3500 ADAM/SILOE 3+1	KARMEL 4000 ADAM/SILOE 3+1
K35.234.M31	K35.237.M31
Pcs 1 Kg 48 mc 0,476	Pcs 1 Kg 50,5 mc 0,503
1230	
4180 4680	
3+1	

KARMEL 3500 ADAM/SILOE 2L	KARMEL 4000 ADAM/SILOE 2L
K35.234.M20	K35.237.M20
Pcs 1 Kg 38,8 mc 0,342	Pcs 1 Kg 41,3 mc 0,369
1240	
4120 4620	
2	

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

TOBIA HIGH POWER LED

LARGE SIZE



Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION




Q33.000.Q1K

CCT SETTABLE

3000 K 4000 K

SDCM < 6





TOBIA HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a **LED ad ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

TOBIA HIGH POWER LED

Q33.000 *



Dimensions and weight

Height: 520 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,089

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
(*) 	15 W	1690 lm	4000 K	.R1K
			3000 K	
CCT SET LED E27 	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27 	50W	6550 lm	4000 K	.H1L
			3000 K	

PHOTOMETRIC DATA SAMPLE



TOBIA E27 LED HIGH POWER 30W

POST height 3,5mt
10x10mt area: average 15 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (15 and 30W only)

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TOBIA E27

LARGE SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lantern quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.


6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT

INDOOR & OUTDOOR USE



Q33.000.F1R





COMPANY
SOLAR
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

TOBIA E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

***TETTO** realizzato in resina antiurto. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

***SOFFITTO** riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

***DIFFUSORE** in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

TOBIA E27

Q33.000 *



Dimensions and weight

Height: 520 mm
Width: 330 mm
Depth: 330 mm
Weight: 3,8 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure: CxS = m² 0,089

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

E27 VERSION

100 - 240 V



*ADD. SUFFIX



Suitable lamps: CFL-LED-SON-HQ1 MAX 70W		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
	6,5W	800 lm	2700 K	.F1R
	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
	11 W	1200 lm	6500 K 4000 K 2700 K	.T1K

E27 lantern supplied as an option with TÜV-CB certified, long-life, efficient LED lamps suitable for outdoor use.

PHOTOMETRIC DATA SAMPLE




TOBIA E27 clear SON 70W.

POST height 3.5mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

CCT SETTABLE LED LAMP(*)



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

TOBIA GX53 LED - FLAT DIFFUSER

LARGE SIZE



Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified long-life, powerful, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 55.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*



Q35.000.D4K


CCT SETTABLE

3000 K
 4000 K
 6500 K

SDCM <6

	UV TREATED	CLASS II			
		+90° -60°			

MADE IN ITALY



TOBIA GX53 LED - LANTERN COMPONENTS



IP55

Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

LANTERN ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER with flat shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

TOBIA GX53 LED

Q35.000 *



Dimensions and weight

Height: 520 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,089

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:


Clear Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

GX53 LED




- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin CEILING provided with 4x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V				
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	4x 10 W 40 W	5160 lm	6500 K 4000 K 3000 K	.D4K

PHOTOMETRIC DATA SAMPLE

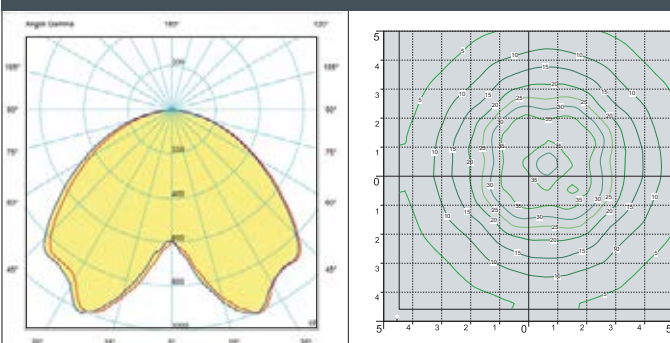

TOBIA GX53 LED
4X10W

POST height 4mt
10x10mt area: average 22 lux

The photometric data for all the versions are available upon request or on our website.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TOBIA

LARGE SIZE



MADE IN ITALY



OFIR/TOBIA
Q33.132
GX53 Q35.132
Pcs 1
Kg 5,6
mc 0,061

EVA/TOBIA
Q33.181
GX53 Q35.181
Pcs 1
Kg 12,3
mc 0,168

TOBIA
Q33.000
GX53 Q35.000
Pcs 1
Kg 4,6
mc 0,043

LOT/TOBIA
Q33.113
GX53 Q35.113
Pcs 1
Kg 5,8
mc 0,061

MIRRA/TOBIA
Q33.142
GX53 Q35.142
Pcs 1
Kg 10,9
mc 0,083

SICHEM/TOBIA
Q33.121
GX53 Q35.121
Pcs 1
Kg 5,4
mc 0,061

RICU/TOBIA
Q33.157
GX53 Q35.157
Pcs 2
Kg 29,2
mc 0,334

GIGI/TOBIA
Q33.156
GX53 Q35.156
Pcs 2
Kg 27,7
mc 0,304

ARTU'/TOBIA
Q33.158
GX53 Q35.158
Pcs 2
Kg 24,7
mc 0,273

ALOE'/TOBIA
Q33.163 resin
GX53 Q35.163 resin
Pcs 2
Kg 15,2
mc 0,208

IAFET.R/TOBIA
Q33.162 resin
GX53 Q35.162 resin
Pcs 2
Kg 14,5
mc 0,179

NEBO/TOBIA

LARGE SIZE



Q33.201.Q1K



Q33.142.Q1K




Q33.201.R20.Q1K



Q33.201.R30.Q1K



MADE IN ITALY



NEBO OFIR/TOBIA 2L
Q33.201.R20
GX53 Q35.201.R20
Pcs 1
Kg 31,8
mc 0,268

NEBO OFIR/TOBIA 3L
Q33.201.R30
GX53 Q35.201.R30
Pcs 1
Kg 36,5
mc 0,342

NEBO/TOBIA
Q33.201
GX53 Q35.201
Pcs 1
Kg 25,6
mc 0,196

NEBO OFIR/TOBIA 2L
Q33.201.R20
GX53 Q35.201.R20
Pcs 1
Kg 31,9
mc 0,268

NEBO OFIR/TOBIA 3L
Q33.201.R30
GX53 Q35.201.R30
Pcs 1
Kg 36,5
mc 0,342

TABOR/TOBIA

LARGE SIZE



Q33.204.R20.Q1K




Q33.204.R30.Q1K



Q35.204.D4K



MADE IN ITALY



TABOR OFIR/TOBIA 2L
Q33.204.R20
GX53 Q35.204.R20

Pcs 1
Kg 36,5
mc 0,295

850

3130

2

TABOR OFIR/TOBIA 3L
Q33.204.R30
GX53 Q35.204.R30

Pcs 1
Kg 41,1
mc 0,369

890

3130

3

TABOR/TOBIA
Q33.204
GX53 Q35.204

Pcs 1
Kg 30,1
mc 0,223

330

3460

2

Ø 275

TABOR OFIR/TOBIA 2L
Q33.204.R20
GX53 Q35.204.R20

Pcs 1
Kg 36,5
mc 0,295

850

3560

2

Ø 275

TABOR OFIR/TOBIA 3L
Q33.204.R30
GX53 Q35.204.R30

Pcs 1
Kg 41,1
mc 0,369

890

3560

3

Ø 275

HOREB/TOBIA

LARGE SIZE



Q33.207.M20.Q1K




Q33.171.Q1K



Q35.207.D4K





HOREB ADAM/TOBIA 1L
Q33.207.M10
GX53 Q35.207.M10

Pcs 1
Kg 34,5
mc 0,280

ADAM/TOBIA
Q33.171
GX53 Q35.171

Pcs 1
Kg 6,1
mc 0,083

600
690
600

HOREB ADAM/TOBIA 2+1
Q33.207.M21
GX53 Q35.207.M21

Pcs 1
Kg 46,4
mc 0,404

1220
4170
2+1

HOREB/TOBIA
Q33.207
GX53 Q35.207

Pcs 1
Kg 32,6
mc 0,249

330
3960
Ø 275

HOREB ADAM/TOBIA 3+1
Q33.207.M31
GX53 Q35.207.M31

Pcs 1
Kg 52,4
mc 0,476

1210
4170
3+1
Ø 275

HOREB ADAM/TOBIA 3L
Q33.207.M30
GX53 Q35.207.M30

Pcs 1
Kg 47,8
mc 0,414

1210
4110
3

HOREB ADAM/TOBIA 2L
Q33.207.M20
GX53 Q35.207.M20


Pcs 1
Kg 41,8
mc 0,342

1220
4110
2

KARMEL 3000/TOBIA

LARGE SIZE





KARMEL 3000 OFIR/TOBIA 2L
Q33.231.R20
GX53 Q35.231.R20

Pcs 1
Kg 36,5
mc 0,295

850

3130

2

KARMEL 3000 OFIR/TOBIA 3L
Q33.231.R30
GX53 Q35.231.R30

Pcs 1
Kg 41,1
mc 0,369

890

3130

3

KARMEL 3000/TOBIA
Q33.231
GX53 Q35.231

Pcs 1
Kg 30,1
mc 0,223

330

3460

2

Ø 275

KARMEL 3000 OFIR/TOBIA 2L
Q33.231.R20
GX53 Q35.231.R20

Pcs 1
Kg 36,5
mc 0,295

850

3560

2

Ø 275

KARMEL 3000 OFIR/TOBIA 3L
Q33.231.R30
GX53 Q35.231.R30

Pcs 1
Kg 41,1
mc 0,369

890

3560

3

Ø 275

KARMEL 3500-4000/TOBIA

LARGE SIZE



Q33.234.M21.Q1K




Q33.171.Q1K



Q33.234.M20.Q1K





KARMEL 3500 ADAM/TOBIA 1L	KARMEL 4000 ADAM/TOBIA 1L
Q33.234.M10	Q33.237.M10
GX53 Q35.234.M10	Q35.237.M10
Pcs 1 Kg 34,5 mc 0,280	Pcs 1 Kg 38 mc 0,287

KARMEL 3500/TOBIA	
Q33.234	
GX53 Q35.234	
Pcs 1 Kg 32,6 mc 0,249	

KARMEL 3500 ADAM/TOBIA 2+1	KARMEL 4000 ADAM/TOBIA 2+1
Q33.234.M21	Q33.237.M21
GX53 Q35.234.M21	Q35.237.M21
Pcs 1 Kg 46,4 mc 0,404	Pcs 1 Kg 48,9 mc 0,431

KARMEL 3500 ADAM/TOBIA 3L	KARMEL 4000 ADAM/TOBIA 3L
Q33.234.M30	Q33.237.M30
GX53 Q35.234.M30	Q35.237.M30
Pcs 1 Kg 47,8 mc 0,414	Pcs 1 Kg 50,3 mc 0,441

KARMEL 3500 ADAM/TOBIA 3+1	KARMEL 4000 ADAM/TOBIA 3+1
Q33.234.M31	Q33.237.M31
GX53 Q35.234.M31	Q35.237.M31
Pcs 1 Kg 52,4 mc 0,476	Pcs 1 Kg 54,9 mc 0,503

KARMEL 3500 ADAM/TOBIA 2L	KARMEL 4000 ADAM/TOBIA 2L
Q33.234.M20	Q33.237.M20
GX53 Q35.234.M20	Q35.237.M20
Pcs 1 Kg 41,8 mc 0,342	Pcs 1 Kg 44,3 mc 0,369

SIMON HIGH POWER LED

LARGE SIZE



Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



U33.132.Q1K

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV SUD

CCT SETTABLE

3000 K 4000 K

SDCM <6



SIMON HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampana E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SIMON HIGH POWER LED

U33.000 *



Dimensions and weight

Height: 560 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,102

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
(*)	15 W	1690 lm	4000 K 3000 K	.R1K
	30 W	3620 lm	4000 K 3000 K	.Q1K
	50W	6550 lm	4000 K 3000 K	.H1L .H1R

PHOTOMETRIC DATA SAMPLE



SIMON E27 LED HIGH POWER 30W

POST height 3,5mt
10x10mt area: average 15 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (15 and 30W only)

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SIMON E27

LARGE SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.

6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K
+80°C -30°	90% HUMIDITY	VOLTAGE SURGE RESISTANT
INDOOR & OUTDOOR USE		



U33.000.T1K





SIMON E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*



Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

***TETTO** realizzato in resina antiurto. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*



High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

***SOFFITTO** riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e idoneo per il fissaggio dei reattori.*



DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agent.

***DIFFUSORE** in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in un unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



Dimensions and weight
Height: 560 mm
Width: 330 mm
Depth: 330 mm
Weight: 3,8 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure: CxS = m² 0,102

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal


LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

E27 VERSION		100 - 240 V		*ADD. SUFFIX
	Suitable lamps: CFL-LED-SON-HQI MAX 70W		E27 lampholder only	.E27
	LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.
		6,5W	800 lm	2700 K .F1R
	(*)	8,5 W	920 lm	6500 K 4000 K .V1K 2700 K
E27 lantern supplied as an option with TÜV-CB certified, long-life, efficient LED lamps suitable for outdoor use.	(*)	11 W	1200 lm	6500 K 4000 K .T1K 2700 K


PHOTOMETRIC DATA SAMPLE

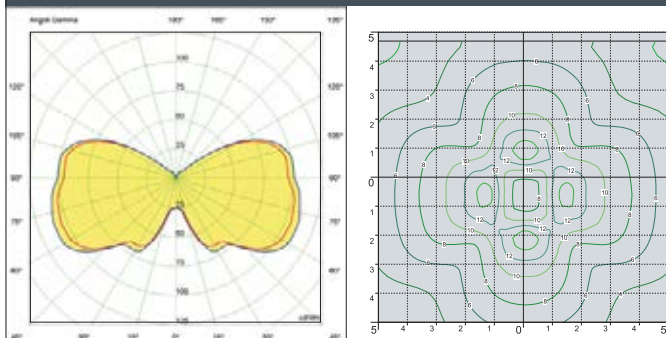

SIMON E27 clear SON 70W.

POST height 3.5mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

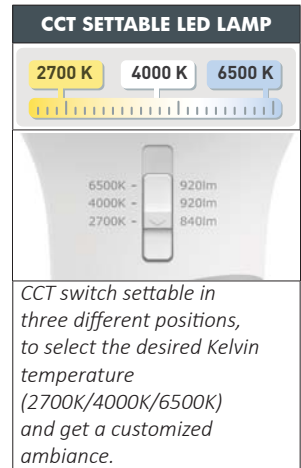

CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SIMON GX53 LED - FLAT DIFFUSER

LARGE SIZE



Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified, long-life, powerful, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 55.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con Kelvin impostabile**, certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*



U35.132.D4K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL	POST	HANGING





SIMON GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

LANTERN ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER with flat shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SIMON GX53 LED

U35.000 *



Dimensions and weight

Height: 560 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,102

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:


Clear Opal

GX53 LED





- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin CEILING provided with 4x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V				
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	4x 10 W 40 W	5160 lm	6500 K 4000 K 3000 K	.D4K

PHOTOMETRIC DATA SAMPLE



SIMON GX53 LED
4X10W

POST height 4mt
10x10mt area: average 22 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SIMON

LARGE SIZE



U33.157.Q1K



U33.121.Q1K



U33.132.Q1K



U33.113.Q1K



U33.162.Q1K



OFIR/SIMON
U33.132
GX53 U35.132
Pcs 1
Kg 5,6
mc 0,061

EVA/SIMON
U33.181
GX53 U35.181
Pcs 1
Kg 12,3
mc 0,168

SIMON
U33.000
GX53 U35.000
Pcs 1
Kg 4,6
mc 0,043

LOT/SIMON
U33.113
GX53 U35.113
Pcs 1
Kg 5,8
mc 0,061

MIRRA/SIMON
U33.142
GX53 U35.142
Pcs 1
Kg 10,9
mc 0,083

SICHEM/SIMON
U33.121
GX53 U35.121
Pcs 1
Kg 5,4
mc 0,061

RICU/SIMON
U33.157
GX53 U35.157
Pcs 2
Kg 29,2
mc 0,334

GIGI/SIMON
U33.156
GX53 U35.156
Pcs 2
Kg 27,7
mc 0,304

ARTU'/SIMON
U33.158
GX53 U35.158
Pcs 2
Kg 24,7
mc 0,273

ALOE'/SIMON
U33.163 resin
GX53 U35.163 resin
Pcs 2
Kg 15,2
mc 0,208

IAFET.R/SIMON
U33.162 resin
GX53 U35.162 resin
Pcs 2
Kg 14,5
mc 0,179

NEBO/SIMON

LARGE SIZE



U33.201.R20.Q1K



U33.201.R30.Q1K



U35.201.D4K





NEBO OFIR/SIMON 2L
U33.201.R20
U35.201.R20

GX53
Pcs 1
Kg 31,9
mc 0,268

NEBO OFIR/SIMON 3L
U33.201.R30
U35.201.R30

GX53
Pcs 1
Kg 36,5
mc 0,342

NEBO/SIMON
U33.201
U35.201

GX53
Pcs 1
Kg 25,6
mc 0,196

Ø 275

NEBO OFIR/SIMON 2L
U33.201.R20
U35.201.R20

GX53
Pcs 1
Kg 31,9
mc 0,268

Ø 275

NEBO OFIR/SIMON 3L
U33.201.R30
U35.201.R30

GX53
Pcs 1
Kg 36,5
mc 0,342

Ø 275

TABOR/SIMON

LARGE SIZE



MADE IN ITALY



TABOR OFIR/SIMON 2L
U33.204.R20
GX53 U35.204.R20
Pcs 1
Kg 36,5
mc 0,268

TABOR OFIR/SIMON 3L
U33.204.R30
GX53 U35.204.R30
Pcs 1
Kg 41,1
mc 0,342

TABOR/SIMON
U33.204
GX53 U35.204
Pcs 1
Kg 30,1
mc 0,196

TABOR OFIR/SIMON 2L
U33.204.R20
GX53 U35.204.R20
Pcs 1
Kg 36,5
mc 0,268

TABOR OFIR/SIMON 3L
U33.204.R30
GX53 U35.204.R30
Pcs 1
Kg 41,1
mc 0,342

HOREB/SIMON

LARGE SIZE



HOREB ADAM/SIMON 1L
U33.207.M10
GX53 U35.207.M10

Pcs 1
Kg 34,5
mc 0,280

ADAM/SIMON
U33.171
GX53 U35.171

Pcs 1
Kg 6,1
mc 0,083

HOREB ADAM/SIMON 2+1
U33.207.M21
GX53 U35.207.M21

Pcs 1
Kg 46,4
mc 0,404

HOREB/SIMON
U33.207
GX53 U35.207

Pcs 1
Kg 32,6
mc 0,249

Ø 275

HOREB ADAM/SIMON 3+1
U33.207.M31
GX53 U35.207.M31

Pcs 1
Kg 52,4
mc 0,476

Ø 275

HOREB ADAM/SIMON 3L
U33.207.M30
GX53 U35.207.M30

Pcs 1
Kg 47,8
mc 0,414

HOREB ADAM/SIMON 2L
U33.207.M20
GX53 U35.207.M20

Pcs 1
Kg 41,8
mc 0,342

KARMEL 3000/SIMON

LARGE SIZE



U33.231.R30.Q1K



U33.231.R20.Q1K



U33.231.Q1K



MADE IN ITALY



KARMEI 3000 OFIR/SIMON 2L
U33.231.R20
U35.231.R20

GX53
Pcs 1
Kg 36,5
mc 0,295

KARMEI 3000 OFIR/SIMON 3L
U33.231.R30
U35.231.R30

GX53
Pcs 1
Kg 41,1
mc 0,369

KARMEI 3000/SIMON
U33.231
U35.231

GX53
Pcs 1
Kg 30,1
mc 0,223

KARMEI 3000 OFIR/SIMON 2L
U33.231.R20
U35.231.R20

GX53
Pcs 1
Kg 36,5
mc 0,295

KARMEI 3000 OFIR/SIMON 3L
U33.231.R30
U35.231.R30

GX53
Pcs 1
Kg 41,1
mc 0,369

KARMEL 3500-4000/SIMON

LARGE SIZE



U33.234.M20.Q1K



U33.171.Q1K



U33.234.Q1K





KARMEL 3500 ADAM/SIMON 1L	KARMEL 4000 ADAM/SIMON 1L
U33.234.M10	U33.237.M10
GX53 U35.234.M10	U35.237.M10
Pcs 1 Kg 34,5 mc 0,280	Pcs 1 Kg 38 mc 0,287

KARMEL 3500/SIMON
U33.234
GX53 U35.234
Pcs 1 Kg 32,6 mc 0,249

Ø 275

KARMEL 3500 ADAM/SIMON 2+1	KARMEL 4000 ADAM/SIMON 2+1
U33.234.M21	U33.237.M21
GX53 U35.234.M21	U35.237.M21
Pcs 1 Kg 46,4 mc 0,404	Pcs 1 Kg 48,8 mc 0,431

2+1

Ø 275

KARMEL 3500 ADAM/SIMON 3L	KARMEL 4000 ADAM/SIMON 3L
U33.234.M30	U33.237.M30
GX53 U35.234.M30	U35.237.M30
Pcs 1 Kg 47,8 mc 0,414	Pcs 1 Kg 50,3 mc 0,441

KARMEL 3500 ADAM/SIMON 3+1	KARMEL 4000 ADAM/SIMON 3+1
U33.234.M31	U33.237.M31
GX53 U35.234.M31	U35.237.M31
Pcs 1 Kg 52,4 mc 0,476	Pcs 1 Kg 54,8 mc 0,503

KARMEL 3500 ADAM/SIMON 2L	KARMEL 4000 ADAM/SIMON 2L
U33.234.M20	U33.237.M20
GX53 U35.234.M20	U35.237.M20
Pcs 1 Kg 41,8 mc 0,342	Pcs 1 Kg 44,3 mc 0,369

ELIA HIGH POWER LED

GRAND SIZE



Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY


VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



Q43.000.W1R





ELIA HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV-rays stabilized.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamada E27 e provvisto di lampada a **LED ad ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. Provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

ELIA HIGH POWER LED

Q43.000 *



Dimensions and weight

Height: 740 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,165

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life, and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V



LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27 LED	50 W	6550 Lm	4000 K	.H1L
			3000 K	.H1R
E27 LED	60 W	7600 Lm	4000 K	.W1L
			3000 K	.W1R

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

PHOTOMETRIC DATA SAMPLE



ELIA E27 LED HIGH POWER 50W

POST height 4,5mt
10x10mt area: average 21 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ELIA E27

GRAND SIZE




E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lantern quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.



Q43.000.E27





ELIA E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and access to control-gear.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e idoneo per il fissaggio dei reattori.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. Provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Provvisto di guarnizione in gomma silconica per garantire un alto livello di protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



Dimensions and weight
Height: 740 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,165


Moulded colours:
Black White
Painted colours:
Antique green Antique bronze
Diffuser PMMA:
Clear Opal

CHROME ALUMINIUM LOUVER
H.FC6 open
Downward position



E27-E40 VERSION		100 - 240 V		*ADD. SUFFIX
	suitable lamps:	E27 Lampholder only	.E27	
	CFL-LED SON-HQI max 100W	E40 Lampholder only	.E40	
Lantern supplied complete with E27 or E40 lampholder.				

PHOTOMETRIC DATA SAMPLE

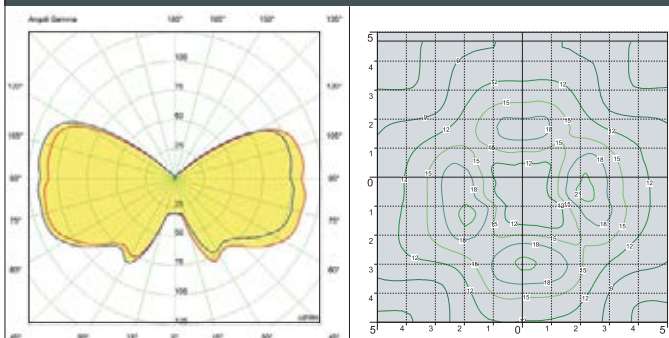

ELIA E27 clear SON 100W.
POST height 4,5mt
10 x 10mt area: average 12 lux
The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ELIA GX53 LED - FLAT DIFFUSER

GRAND SIZE



Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified, long-life, powerful, efficient and **kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 55.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*

Q45.000.D8K




CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





ELIA GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

LANTERN ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER with FLAT shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFUSORE in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

ELIA GX53 LED

Q45.000 *



Dimensions and weight

Height: 740 mm
Width: 430 mm
Depth: 430 mm
Weight: 9,1 Kg

Area exposed to wind pressure:
CxS = m² 0,165

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal


GX53 LED




- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin CEILING provided with 8x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	8x 10 W 80 W	10320 lm	6500 K 4000 K 3000 K	.D8K

PHOTOMETRIC DATA SAMPLE

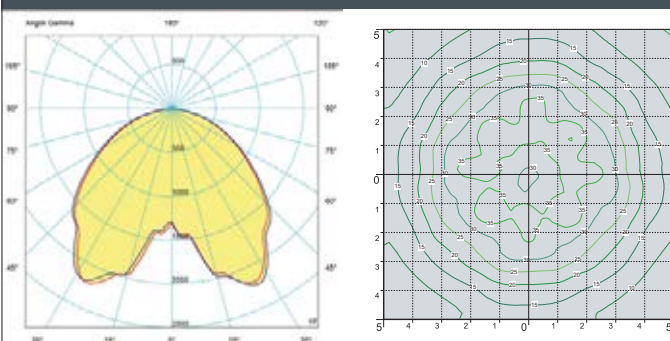

ELIA GX53 LED 8X10W

POST height 4,5mt
10x10mt area: average 28 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

ELIA

GRAND SIZE





GIONA 5000/ELIA	
Q43.227	
GX53	Q45.227
Pcs 1 Kg 67,5 mc 1,112	430

5680

400

GIONA 4000/ELIA	GIONA 4500/ELIA
Q43.221	Q43.224
GX53 Q45.221	Q45.224
Pcs 1 Kg 62,5 mc 0,862	Pcs 1 Kg 65,5 mc 0,982

430

4680
5180

400

KARMEL 3500/ELIA	KARMEL 4000/ELIA
Q43.234	Q43.237
GX53 Q45.234	Q45.237
Pcs 1 Kg 38,6 mc 0,402	Pcs 1 Kg 42 mc 0,453

430

4180
4680

Ø 275

KARMEL 3000/ELIA	
Q43.231	
GX53	Q45.231
Pcs 1 Kg 33 mc 0,362	

430

3680

Ø 275

ELIA	
Q43.000	
GX53	Q45.000
Pcs 1 Kg 7,5 mc 0,182	430

740

Ø 60

TABOR/ELIA	HOREB/ELIA
Q43.204	Q43.207
GX53 Q45.204	Q45.207
Pcs 1 Kg 33 mc 0,362	Pcs 1 Kg 35,5 mc 0,402

430


3680
4180

Ø 275

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GIONA 4000/ELIA

GRAND SIZE

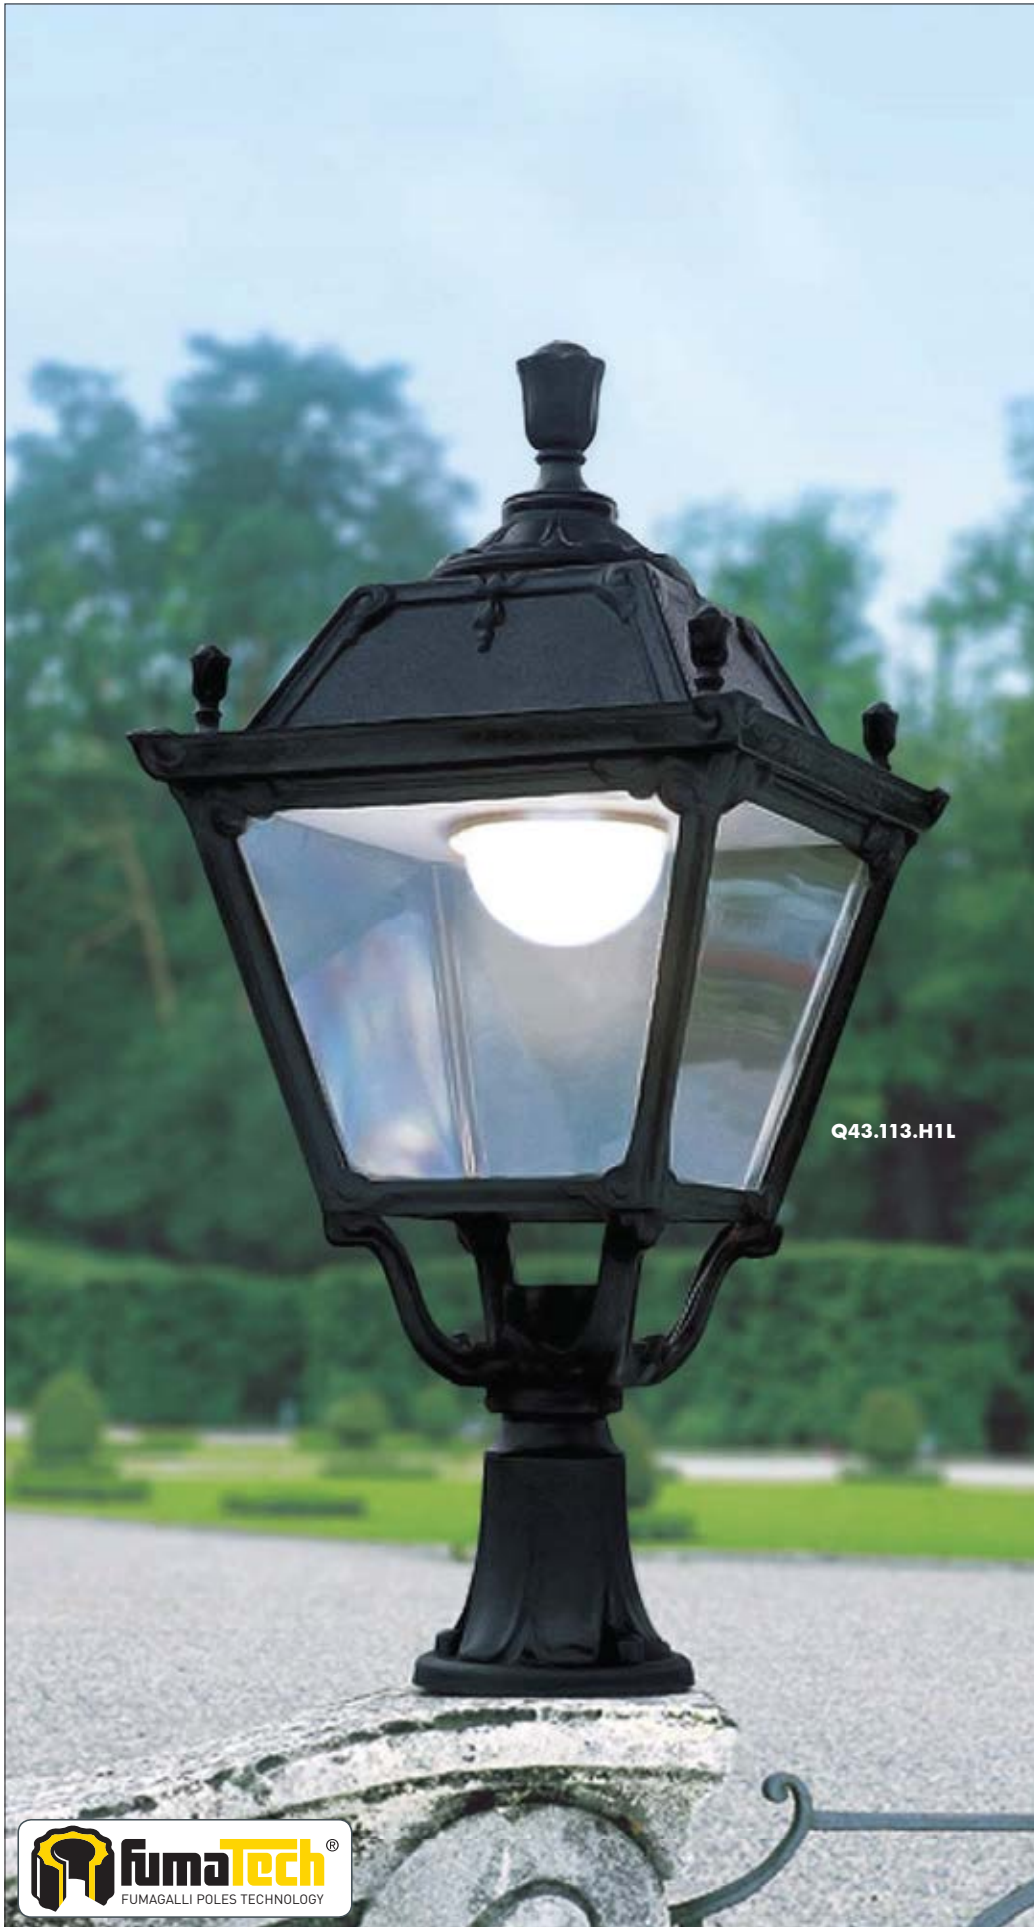

Q43.113.H1L




Q43.171.H1L



Q45.221.C8K



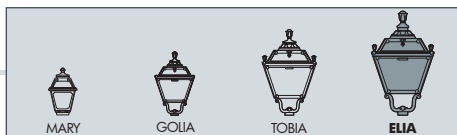

ADAM/ELIA
Q43.171
Q45.171

GX53
Pcs 1
Kg 9
mc 0,190

GIONA 4000 ADAM/ELIA 2L
Q43.221.M20
Q45.221.M20

GX53
Pcs 1
Kg 73
mc 0,863

LOT/ELIA
Q43.113
Q45.113

GX53
Pcs 1
Kg 8,4
mc 0,182

GIONA 4000 ADAM/ELIA 1L
Q43.221.M10
Q45.221.M10

GX53
Pcs 1
Kg 64
mc 0,752

GIONA 4000 ADAM/ELIA 2L
Q43.221.M20
Q45.221.M20

GX53
Pcs 1
Kg 82
mc 1,100

GIONA 4000 ADAM/ELIA 3L
Q43.221.M30
Q45.221.M30

GX53
Pcs 1
Kg 82
mc 1,100

GIONA 4000 ADAM/ELIA 2+1
Q43.221.M21
Q45.221.M21


GX53
Pcs 1
Kg 80,5
mc 0,931

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GIONA 4500-5000/ELIA

GRAND SIZE





GIONA 4500 ARON/ELIA		GIONA 5000 ARON/ELIA	
Q43.224.N10		Q43.227.N10	
GX53 Q45.224.N10	GX53 Q45.227.N10		
Pcs 1 Kg 71,5 mc 0,949	Pcs 1 Kg 73,5 mc 1,191		

ARON/ELIA	
Q43.172	
Q45.172	
GX53	
Pcs 1 Kg 13 mc 0,223	

GIONA 4500 ARON/ELIA 2L		GIONA 5000 ARON/ELIA 2L	
Q43.224.N20		Q43.227.N20	
GX53 Q45.224.N20	GX53 Q45.227.N20		
Pcs 1 Kg 82,5 mc 1,196		Pcs 1 Kg 84,5 mc 1,329	

GIONA 4500 ARON/ELIA 4L		GIONA 5000 ARON/ELIA 4L	
Q43.224.N40		Q43.227.N40	
GX53 Q45.224.N40	GX53 Q45.227.N40		
Pcs 1 Kg 105 mc 1,444		Pcs 1 Kg 107 mc 1,605	

ERMON.R/ELIA	
Q43.195 resin	
GX53 Q45.195 resin	
Pcs 1 Kg 13,5 mc 0,250	

PIETRO HIGH POWER LED

GRAND SIZE



Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



U43.000.H1L





PIETRO HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. UV-rays stabilized.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a **LED ad ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER with **FLAT** shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

PIETRO HIGH POWER LED

U43.000 *



Dimensions and weight

Height: 770 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,182

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life, and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.



100 - 240 V				
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27 LED	50 W	6550 Lm	4000 K	.H1L
			3000 K	.H1R
E27 LED	60 W	7600 Lm	4000 K	.W1L
			3000 K	.W1R

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

PHOTOMETRIC DATA SAMPLE



PIETRO E27 LED HIGH POWER 50W

POST height 4,5mt
10x10mt area: average 21 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

PIETRO E27

GRAND SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lantern quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.



U43.000.E27

--	--	--	--





PIETRO E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

ROOF made of shockproof resin material, UV-rays stabilized.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.

DIFFUSER with **FLAT** shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma silconica per garantire una migliore protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

PIETRO E27

U43.000 *



Dimensions and weight

Height: 770 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,182

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

CHROME ALUMINIUM LOUVER

H.FC6 open
Downward position



E27-E40

100 - 240 V

*ADD. SUFFIX



suitable lamps:

CFL-LED
SON-HQI
max 100W

E27
Lampholder only



.E27

E40
Lampholder only

.E40

Lantern supplied complete with **E27** or **E40** lampholder.

PHOTOMETRIC DATA SAMPLE



PIETRO E27 clear SON 100W.

POST height 4,5mt
10 x 10mt area: average 12 lux

The photometric data for all the versions are available upon request or on our website.

PIETRO GX53 LED - FLAT DIFFUSER

GRAND SIZE



Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified, long-life, powerful, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 55.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*

U45.000.D8K



CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6



PIETRO GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

LANTERN ROOF made of shockproof resin material, UV-rays stabilized.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV.

DIFFUSER with **FLAT** shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFUSORE in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

PIETRO GX53 LED

U45.000 *



Dimensions and weight

Height: 770 mm
Width: 430 mm
Depth: 430 mm
Weight: 9,1 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,182

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal


GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin **CEILING** provided with 8x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	8x 10 W 80 W	10320 Lm	6500 K 4000 K 3000 K	.D8K

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

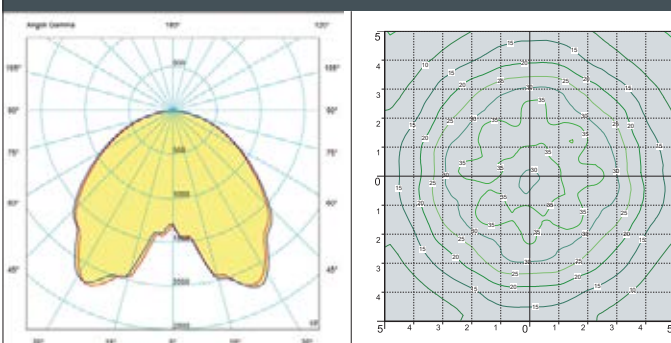

PIETRO GX53 LED
8X10W

POST height 4,5mt
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

PIETRO

GRAND SIZE



U43.224.H1L



U43.113.D8K

MADE IN ITALY



GIONA 5000/PIETRO	
	U43.227
GX53	U45.227
Pcs 1 Kg 67,5 mc 1,112	430

5710

400

GIONA 4000/PIETRO	GIONA 4500/PIETRO
U43.221	U43.224
GX53 U45.221	U45.224
Pcs 1 Kg 62,5 mc 0,862	Pcs 1 Kg 65,5 mc 0,982

430

4710
5210

400

KARMEL 3500/PIETRO	KARMEL 4000/PIETRO
U43.234	U43.237
GX53 U45.234	U45.237
Pcs 1 Kg 38,6 mc 0,402	Pcs 1 Kg 42 mc 0,453

430

4210
4710

Ø 275

LOT/PIETRO	
	U43.113
GX53	U45.113
Pcs 1 Kg 8,4 mc 0,182	430

940

Ø 190

PIETRO	
	U43.000
GX53	U45.000
Pcs 1 Kg 7,5 mc 0,182	430

770

Ø 60

TABOR/PIETRO	HOREB/PIETRO
U43.204	U43.207
GX53 U45.204	U45.207
Pcs 1 Kg 33 mc 0,362	Pcs 1 Kg 35,5 mc 0,402

430

KARMEL 3000/PIETRO	
	U43.231
GX53	U45.231
Pcs 1 Kg 33 mc 0,362	430

3710

Ø 275

3710
4210

Ø 275

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GIONA 4000/PIETRO

GRAND SIZE



U43.221.M21.W1L



U43.171.W1L



U45.221.M10.C8K





ADAM/PIETRO
U43.171
GX53 U45.171

Pcs 1
Kg 9
mc 0,190

GIONA 4000 ADAM/PIETRO 3L
U43.221.M30
GX53 U45.221.M30

Pcs 1
Kg 82
mc 1,100

GIONA 4000 ADAM/PIETRO 2+1
U43.221.M21
GX53 U45.221.M21

1500

4920

2+1

Pcs 1
Kg 80,5
mc 0,931

GIONA 4000 ADAM/PIETRO 1L
U43.221.M10
GX53 U45.221.M10

800

4090

1

Pcs 1
Kg 64
mc 0,752

400

GIONA 4000 ADAM/PIETRO 2L
U43.221.M20
GX53 U45.221.M20

1400

4860

3

Pcs 1
Kg 73
mc 0,863

400

GIONA 4000 ADAM/PIETRO 2L
U43.221.M20
GX53 U45.221.M20

1500

4860

2

Pcs 1
Kg 73
mc 0,863

GIONA 4500-5000/PIETRO

GRAND SIZE





GIONA 4500 ARON/PIETRO 1L	GIONA 5000 ARON/PIETRO 1L
U43.224.N10	U43.227.N10
GX53 U45.224.N10	U45.227.N10
Pcs 1 Kg 71,5 mc 0,949	Pcs 1 Kg 73,5 mc 1,191

ARON/PIETRO	
U43.172	U45.172
GX53	
Pcs 1 Kg 13 mc 0,223	

GIONA 4500 ARON/PIETRO 2L	GIONA 5000 ARON/PIETRO 2L
U43.224.N20	U43.227.N20
GX53 U45.224.N20	GX53 U45.227.N20
Pcs 1 Kg 82,5 mc 1,196	Pcs 1 Kg 84,5 mc 1,329

GIONA 4500 ARON/PIETRO 4L	GIONA 5000 ARON/PIETRO 4L
U43.224.N40	U43.227.N40
GX53 U45.224.N40	GX53 U45.227.N40
Pcs 1 Kg 105 mc 1,444	Pcs 1 Kg 107 mc 1,605

ERMON.R/PIETRO
U43.195 resin
GX53 U45.195 resin
Pcs 1 Kg 13,5 mc 0,250

GLOBE 400 CLASSIC

LARGE SIZE



Ø 400 mm PMMA globe, complete with classic base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Globo Ø 400 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 e predisposta per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.

G40.B40.E27FC1



MADE IN ITALY


GLOBE 400 CLASSIC - COMPONENTS

IP55



400 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 400 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

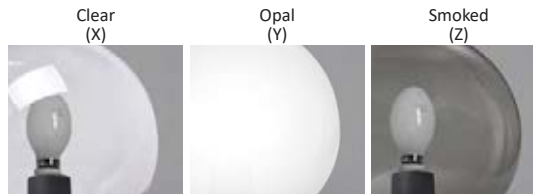

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Globe **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support and of a cover provided with E27 lampholder.

BASE del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalamпада E27 (incluso).

GLOBE 400 CLASSIC

G40.B40 *



Dimensions and weight

Height: 410 mm
Diameter: 400 mm
Junction to support: diameter 60 mm
Weight: 2,3 Kg
Area exposed to wind pressure:
CxS = m² 0,122

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal Smoked

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



H.FC6 open
Downward position



E27

*ADD. SUFFIX



suitable lamps:



CFL-LED
max 50W

E27
Lampholder only

.E27

Globe complete with classic base and E27 lampholder.

PHOTOMETRIC DATA SAMPLE



GLOBE 400 E27 - opal
30W High Power LED

POST height 3,5mt
10x10mt area: average 5 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THE ABOVE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TABOR/GLOBE 400 CLASSIC

LARGE SIZE



MADE IN ITALY



OFIR/G400
G40.132

Pcs 2
Kg 6,1
mc 0,133

ADAM/G400
G40.171

Pcs 2
Kg 7,5
mc 0,192

GLOBE 400 CLASSIC
G40.B40

Pcs 2
Kg 4,7
mc 0,133

TABOR/G400
G40.204

Pcs 1
Kg 27,9
mc 0,230

TABOR OFIR/G400 2L
G40.204.R20

Pcs 1
Kg 33,2
mc 0,347

TABOR OFIR/G400 3L
G40.204.R30

Pcs 1
Kg 36
mc 0,429

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

HOREB/GLOBE 400 CLASSIC

LARGE SIZE



G40.207.M21



G40.113



G40.207.M20



MADE IN ITALY

HOREB ADAM/G400 1L
G40.207.M10

Pcs 1
Kg 32,2
mc 0,310

735

3630

Ø 400

1

LOT/G400
G40.113

Pcs 2
Kg 6,5
mc 0,152

Ø 400

710

Ø 190

SICHEM/G400
G40.121

Pcs 2
Kg 5,3
mc 0,133

960

Ø 400

HOREB ADAM/G400 2L
G40.207.M20

Ø 400

4190

2

Pcs 1
Kg 35,7
mc 0,378

HOREB/G400
G40.207

Pcs 1
Kg 30,3
mc 0,256

Ø 400

4020

Ø 275

HOREB ADAM/G400 3+1
G40.207.M31

Pcs 1
Kg 41,6
mc 0,545

1280

Ø 400

4240

3+1

Ø 275

HOREB ADAM/G400 2+1
G40.207.M21

Pcs 1
Kg 38
mc 0,447

1300

Ø 400

4240

2+1

HOREB ADAM/G400 3L
G40.207.M30

Pcs 1
Kg 39,4
mc 0,477

1280

Ø 400


4190

3

KARMEL 3000/GLOBE 400 CLASSIC

LARGE SIZE





KARMEL 3000/G400
G40.231

Pcs 1
Kg 27,9
mc 0,230

Ø 400

3520

Ø 275

KARMEL 3000 OFIR/G400 2L
G40.231.R20

Pcs 1
Kg 33,2
mc 0,347

920

Ø 400

3620

Ø 275

2

KARMEL 3000 OFIR/G400 3L
G40.231.R30

Pcs 1
Kg 36
mc 0,429

960

Ø 400

3620


Ø 275

3

KARMEL 3500-4000/GLOBE 400 CLASSIC

LARGE SIZE





KARMEL 3500 ADAM/G400 1L	KARMEL 4000 ADAM/G400 1L
G40.234.M10	G40.237.M10
Pcs 1 Kg 32,2 mc 0,310	Pcs 1 Kg 34,7 mc 0,407

EVA/G400 2L
G40.181
Pcs 1 Kg 79 mc 0,353

KARMEL 3500 ADAM/G400 3L	KARMEL 4000 ADAM/G400 3L
G40.234.M30	G40.237.M30
Pcs 1 Kg 39,4 mc 0,477	Pcs 1 Kg 41,9 mc 0,482

KARMEL 3500/G400	KARMEL 4000/G400
G40.234	G40.237
Pcs 1 Kg 30,3 mc 0,256	Pcs 1 Kg 32,8 mc 0,283

KARMEL 3500 ADAM/G400 2+1	KARMEL 4000 ADAM/G400 2+1
G40.234.M21	G40.237.M21
Pcs 1 Kg 38 mc 0,420	Pcs 1 Kg 40,5 mc 0,545

KARMEL 3500 ADAM/G400 3+1	KARMEL 4000 ADAM/G400 3+1
G40.234.M31	G40.237.M31
Pcs 1 Kg 41,6 mc 0,502	Pcs 1 Kg 44,1 mc 0,545

KARMEL 3500 ADAM/G400 2L	KARMEL 4000 ADAM/G400 2L
G40.234.M20	G40.237.M20
Pcs 1 Kg 35,7 mc 0,378	Pcs 1 Kg 38,2 mc 0,400

COMPANY
SOLAR
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GIONA 4000/GLOBE 400 CLASSIC

LARGE SIZE



G40.221.M21



G40.221.M30



GIONA 4000 ADAM/G400 1L
G40.221.M10

Pcs 1
Kg 59,2
mc 0,897

700

4090

Ø 400

1

400

GIONA 4000 ADAM/G400 3+1
G40.221.M31

Pcs 1
Kg 69,1
mc 1,32

1200

4740

Ø 400

3+1

400

GIONA 4000 ADAM/G400 2L
G40.221.M20

1300

4690

Ø 400

2

Pcs 1
Kg 63
mc 0,965

GIONA 4000 ADAM/G400 2+1
G40.221.M21

Pcs 1
Kg 65,3
mc 1,034

1300

4740

Ø 400

2+1

GIONA 4000 ADAM/G400 3L
G40.221.M30

Pcs 1
Kg 66,7
mc 1,064

1200

4690

Ø 400

3

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 500 CLASSIC

GRAND SIZE



Ø 500 mm PMMA globe, complete with classic base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Globo Ø 500 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 e predisposta per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.



G50.B50.E27FC1

MADE IN ITALY


GLOBE 500 CLASSIC - COMPONENTS

IP55



500 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 500 mm Ø 500 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

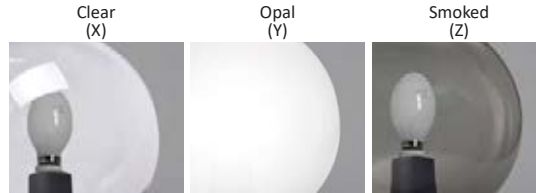

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Luminaries **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support and of a cover provided with E27 - E40 lampholder.

BASE del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalamпада E27 (incluso).

GLOBE 500 CLASSIC

G50.B50 *



Dimensions and weight

Height: 630 mm
Diameter: 500 mm
Junction to support: diameter 60 mm
Weight: 3,6 Kg
Area exposed to wind pressure:
CxS = m² 0,181

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal Smoked

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



H.FC6 open
Downward position



E27-E40


*ADD. SUFFIX



Globe complete with classic base and E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

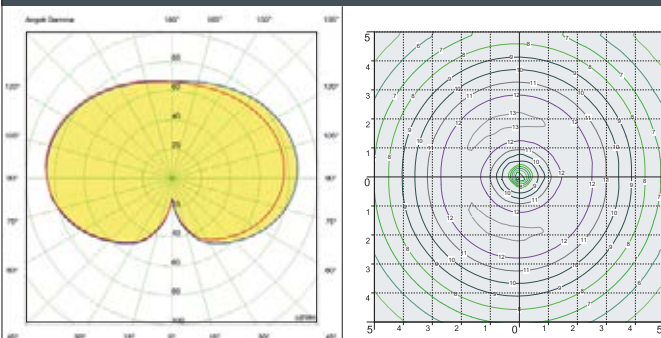

GLOBE 500 E27 - opal
HQI 100W

POST height 4,5mt
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THE ABOVE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE


GLOBE 500 CLASSIC

GRAND SIZE



G50.227



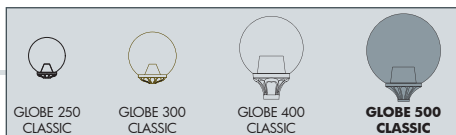

GIONA 5000/G500
G50.227

Pcs 1
Kg 63,6
mc 1,157

Ø 500

5500

400

GIONA 4000/G500	GIONA 4500/G500
G50.221	G50.224
Pcs 1 Kg 58,6 mc 0,907	Pcs 1 Kg 61,6 mc 1,027

Ø 500

5000
4500

400

KARMELO 3500/G500	KARMELO 4000/G500
G50.234	G50.237
Pcs 1 Kg 31,6 mc 0,447	Pcs 1 Kg 34,1 mc 0,498

Ø 500

4500
4000

Ø 275

SICHEM/G500
G50.121

Pcs 2
Kg 15,2
mc 0,275

1050

Ø 500

GLOBE 500 CLASSIC
G50.B50

Pcs 2
Kg 7,2
mc 0,275

Ø 500

630

Ø 60

TABOR/G500	HOREB/G500
G50.204	G50.207
Pcs 1 Kg 29,1 mc 0,407	Pcs 1 Kg 31,6 mc 0,447

Ø 500

4000
3500

Ø 275

KARMELO 3000/G500
G50.231

Pcs 1
Kg 29,1
mc 0,407

Ø 500

3500

Ø 275

GIONA 4500-5000/GLOBE 500 CLASSIC

GRAND SIZE



GIONA 4500 ARON/G500 1L	GIONA 5000 ARON/G500 1L
G50.224.N10	G50.227.N10
Pcs 1 Kg 67,4 mc 1,031	Pcs 1 Kg 69,4 mc 1,146
1185	

ARON/G500
G50.172
Pcs 1 Kg 8,9 mc 0,178
1165

LOT/G500
G50.113
Pcs 2 Kg 9 mc 0,275

GIONA 4500 ARON/G500 2L	GIONA 5000 ARON/G500 2L
G50.224.N20	G50.227.N20
Pcs 1 Kg 74 mc 1,115	Pcs 1 Kg 76 mc 1,239
2270	

ERMON.R/G500
G50.195 resin
500
Pcs 1 Kg 9,6 mc 0,212

GIONA 4500 ARON/G500 4L	GIONA 5000 ARON/G500 4L
G50.224.N40	G50.227.N40
Pcs 1 Kg 89 mc 1,282	Pcs 1 Kg 91 mc 1,425
2270	



URBAN MODERN

GIORGIO-ROSA

FLOODLIGHT




Post top system complete with single or double luminaires made in in shockproof resin material, UV-rays stabilized, rust and corrosion-free. The provided bracket allows a fully adjustable floodlight position to direct the light emission. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with **2x E27 lampholders**. Insulation class II, Protection rating IP66.

*Sistema completo di diffusori per installazioni a palo con luce singola o doppia. Fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Il braccio in dotazione permette l'inclinazione e l'orientamento del proiettore per direzionare il flusso luminoso. Fornito con **incluse lampadine a LED GX53 con kelvin impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione **2x E27**. Classe di isolamento II, grado di protezione IP66.*



GIORGIO
4P2.000.G10
4P1.000.G10



ROSA
4P2.000.G20
4P1000.G20



4P2.000.G10




4P2.000.G20

CCT SETTABLE

2700 K 3000 K 4000 K 6500 K

SDCM < 6






GIORGIO/ROSA - COMPONENTS

IP66



Square **FLOODLIGHT** with no visible screws made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV certified, long-life and efficient GX53 LED lamps included or provided with 2x E27 lampholders.

PROIETTORE quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Provvisto di lampadine a LED GX53 approvate TÜV di lunga durata ed elevata efficienza o fornito nella versione 2x E27.

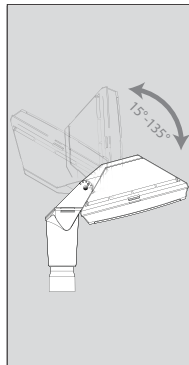

POST TOP SYSTEM with single or double bracket made in shockproof resin material, UV-rays stabilized. The provided bracket allows a fully adjustable position of the floodlight to direct at will the light emission.

SISTEMA A PALO con braccio singolo o doppio realizzato in resina antiurto, stabilizzata ai raggi UV. Il braccio permette l'orientamento in qualsiasi posizione del proiettore per poter direzionare il flusso luminoso.

GIORGIO

4P2.000.G10 *



Dimensions and weight

Height: 200 mm
Width: 420 mm
Weight: 4 Kg

ROSA

4P2.000.G20 *



Dimensions and weight

Height: 200 mm
Width: 700 mm
Weight: 6 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

4x GX53 LED

FULLY PRE-WIRED




4P2.000

Floodlight supplied with white resin reflective ceiling fully pre-wired and complete with 4 x TÜV-CB certified long-life efficient and Kelvin settable GX53 LED lamps included. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GX53 LED	4x 10W 40W	5160 lm	6500 K 4000 K 3000 K	.D4K



4x 10W = 100W
5160 Lm



SAVE 60%



GX53 LED

FULLY PRE-WIRED



4P1.000

Floodlight supplied fully pre-wired, and complete with TÜV approved, long-life, efficient and Kelvin settable GX53 LED lamp in different wattages.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	7,2 W	920 lm	6500 K 4000 K 2700 K	.A1K
	11,3 W	1510 lm	6500 K 4000 K 2700 K	.B1K
	17 W	2350 lm	6500 K 4000 K 2700 K	.E1K
	7,2 W + SENSOR	920 lm	6500 K 4000 K 2700 K	.ASK
	11,3 W + SENSOR	1510 lm	6500 K 4000 K 2700 K	.BSK
	17W + SENSOR	2350 lm	6500 K 4000 K 2700 K	.ESK



7,2W
11,3W
17W = 60W
100W
150W

incandescent

SAVE 88%

2x E27

FULLY PRE-WIRED



4P2.000

Floodlight supplied fully pre-wired with white resin reflective ceiling and complete with 2x E27 lampholders.

Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

LAMP	max	*ADD. SUFFIX
2x E27 (CFL -LED)	max 160 mm	.E28
2x E27 + SENSOR	max 160 mm	.ES8

LED LAMPS



LVD EMC ERP


Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE


GIORGIO-ROSA


FLOODLIGHT






GIORGIO	
11,3W	4P1.000.G10.B1K
17W	4P1.000.G10.E1K
40W	4P2.000.G10.D4K
CCT SETTABLE GX53 LED LAMP INCLUDED	
	
Pcs 1 Kg 4 mc 0,029	
2x E27 lampholder	4P2.000.G10.E28

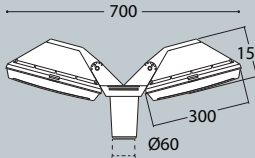ROSA	
2x 11,3W	4P1.000.G20.B1K
2x 17W	4P1.000.G20.E1K
2x 40W	4P2.000.G20.D4K
CCT SETTABLE GX53 LED LAMP INCLUDED	
	
Pcs 1 Kg 6 mc 0,049	
2x E27 lampholder	4P2.000.G20.E28

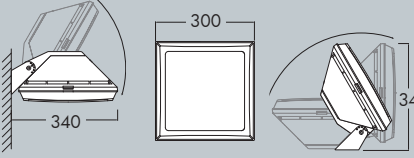GIOVA/GIUSEPPE	
11,3W	4P1.702.B1K
17W	4P1.702.E1K
40W	4P2.702.D4K
CCT SETTABLE GX53 LED LAMP INCLUDED	
	
Pcs 10 Kg 31 mc 0,195	
2x E27 lampholder	4P2.702.E28

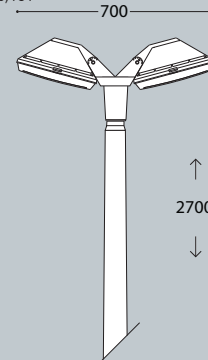
EKTOR 2500/ROSA
4P2.361.G20
Pcs 1 Kg 27 mc 0,181




EKTOR 4000/GIORGIO	AKILLE 4000/GIORGIO
4P2.371.G10	4P2.421.G10
Pcs 1 Kg 40 mc 0,240	
EKTOR 3500/GIORGIO	AKILLE 3500/GIORGIO
4P2.367.G10	4P2.417.G10
Pcs 1 Kg 37 mc 0,214	



EKTOR 3000/GIORGIO	AKILLE 3000/GIORGIO
4P2.364.G10	4P2.414.G10
Pcs 1 Kg 34 mc 0,188	

EKTOR 4000/ROSA	AKILLE 4000/ROSA
4P2.371.G20	4P2.421.G20
Pcs 1 Kg 43 mc 0,260	
EKTOR 3500/ROSA	AKILLE 3500/ROSA
4P2.367.G20	4P2.417.G20
Pcs 1 Kg 40 mc 0,234	

EKTOR 3000/ROSA	AKILLE 3000/ROSA
4P2.364.G20	4P2.414.G20
Pcs 1 Kg 37 mc 0,208	

EKTOR 2500/GIORGIO
4P2.361.G10
Pcs 1 Kg 24 mc 0,161

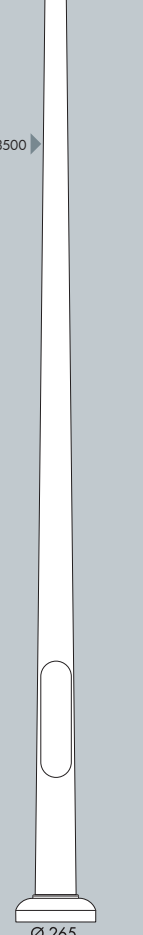
EKTOR 4000/GIORGIO	AKILLE 4000/GIORGIO
4P2.371.G10	4P2.421.G10
Pcs 1 Kg 40 mc 0,240	
EKTOR 3500/GIORGIO	AKILLE 3500/GIORGIO
4P2.367.G10	4P2.417.G10
Pcs 1 Kg 37 mc 0,214	
EKTOR 3000/GIORGIO	AKILLE 3000/GIORGIO
4P2.364.G10	4P2.414.G10
Pcs 1 Kg 34 mc 0,188	
	

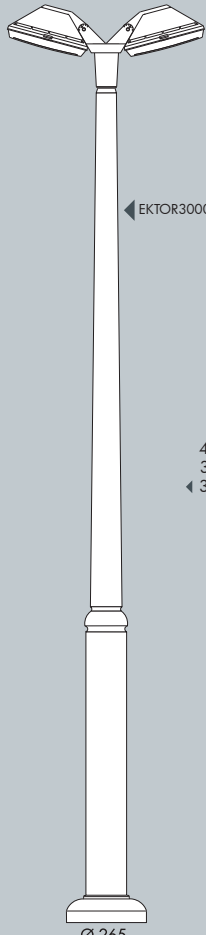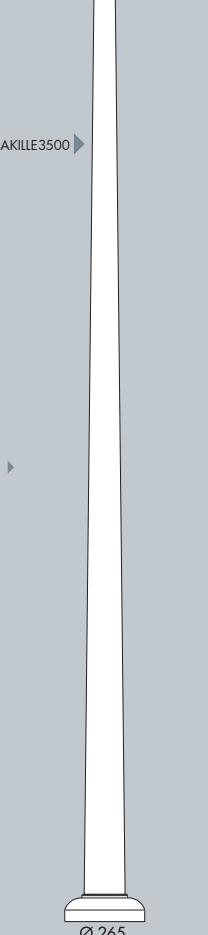EKTOR 4000/ROSA	AKILLE 4000/ROSA
4P2.371.G20	4P2.421.G20
Pcs 1 Kg 43 mc 0,260	
EKTOR 3500/ROSA	AKILLE 3500/ROSA
4P2.367.G20	4P2.417.G20
Pcs 1 Kg 40 mc 0,234	
EKTOR 3000/ROSA	AKILLE 3000/ROSA
4P2.364.G20	4P2.414.G20
Pcs 1 Kg 37 mc 0,208	
	

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 400 HIGH POWER LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included.** Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



V50.000.H1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY


VOLTAGE SURGE RESISTANT



DRIVER SILICONE PROTECTION



MADE IN ITALY



VIVI 400 HIGH POWER LED - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di **lampada a LED ad ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

VIVI 400 HIGH POWER LED

V50.000 *



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 4,2 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal



HIGH POWER LED





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27 	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27 	50 W	6550 lm	4000 K	.H1L
			3000 K	

PHOTOMETRIC DATA SAMPLE



VIVI 400 E27 HIGH POWER LED 50W

POST height 3,5mt
10x10mt area: average 28 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP(*)



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (30W only)

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di sistema modulare a LED GX53 con kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.




V50.000.D6K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





VIVI 400 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

VIVI 400 GX53 LED

V50.000 *



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 4,9 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:


Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


100 - 240 V				
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	6x 10W 60W	7740 lm	6500 K 4000 K 3000 K	.D6K

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



VIVI 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 37 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 400 E27

LARGE SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.




V50.000.E27





VIVI 400 E27 - E40 - COMPONENTS

IP55

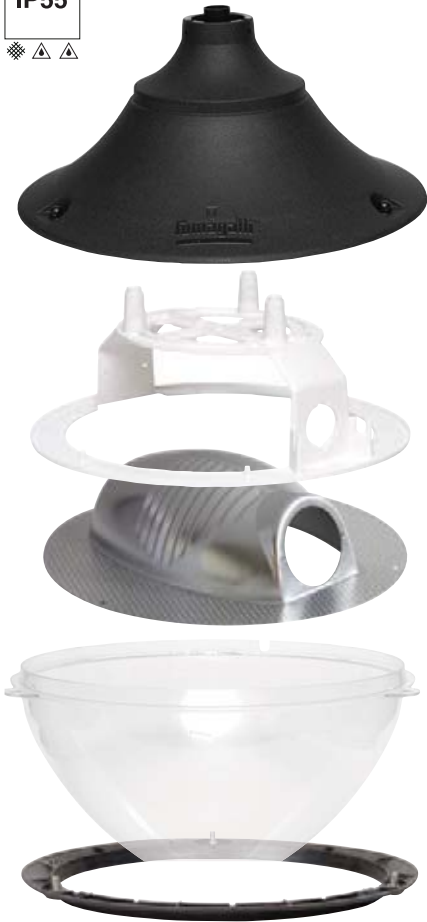

ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampana E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 3,7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

E27-E40



*ADD SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE




VIVI 400 E27
HQI 70W

POST height 4mt
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

HORIZONTAL BULB

AGAINST LIGHT POLLUTION




* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

VIVI 400

LARGE SIZE



MADE IN ITALY



LUIGI 400-DR
L41.128

Pcs 1
Kg 4,2
mc 0,09

*rope not included

NEW LOT/VIVI400
V50.115

Pcs 1
Kg 5,2
mc 0,071

VIVI 400
V50.000

Pcs 1
Kg 4,9
mc 0,09

MIDIPIALAR/VIVI400
V50.254

Pcs 1
Kg 5,5
mc 0,092

MARIO/VIVI400
V50.129

Pcs 1
Kg 5,2
mc 0,07

*rope not included

EKTOR 4000 MIDIPIALAR/VIVI400 1L	AKILLE 4000 MIDIPIALAR/VIVI400 1L
V50.371.A10	V50.421.A10
Pcs 1 Kg 41 mc 0,314	
EKTOR 3500 MIDIPIALAR/VIVI400 1L	AKILLE 3500 MIDIPIALAR/VIVI400 1L
V50.367.A10	V50.417.A10
Pcs 1 Kg 37,5 mc 0,284	

EKTOR 2500 MIDIPIALAR/VIVI400 1L
V50.361.A10

Pcs 1
Kg 30,6
mc 0,235

Ø 265


EKTOR 3000 MIDIPIALAR/VIVI400 1L	AKILLE 3000 MIDIPIALAR/VIVI400 1L
V50.364.A10	V50.414.A10
Pcs 1 Kg 34 mc 0,262	

Ø 265


Ø 265

VIVI 400

LARGE SIZE

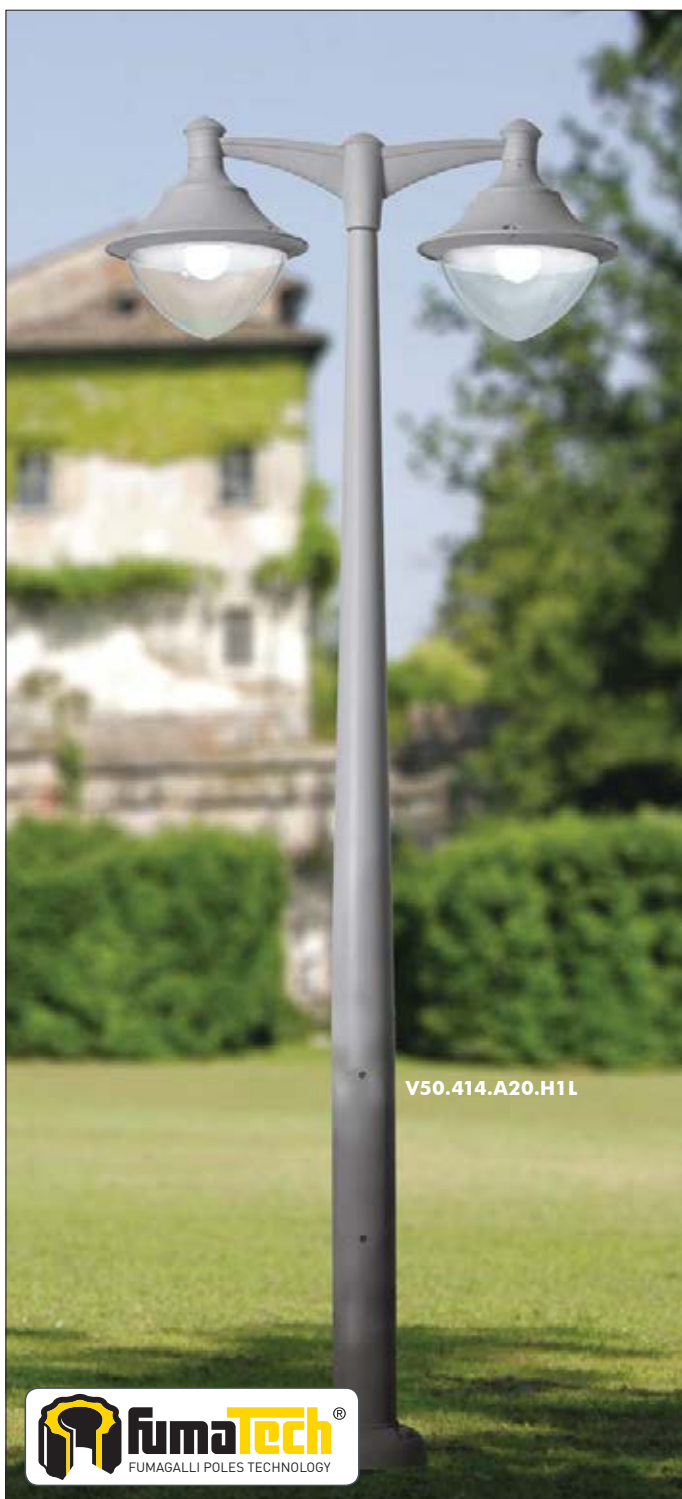

MADE IN ITALY



EKTOR 2500 MIDIPILAR/VIVI400 3L
V50.361.A30

Pcs 1
Kg 42
mc 0,497

1135

2755

Ø 265

EKTOR 2500 MIDIPILAR/VIVI400 2L
V50.361.A20

Pcs 1
Kg 86,2
mc 0,306

1220

2755

Ø 265

EKTOR 4000 MIDIPILAR/VIVI400 2L V50.371.A20	AKILLE 4000 MIDIPILAR/VIVI400 2L V50.421.A20
Pcs 1 Kg 46,5 mc 0,385	
EKTOR 3500 MIDIPILAR/VIVI400 2L V50.367.A20	AKILLE 3500 MIDIPILAR/VIVI400 2L V50.417.A20
Pcs 1 Kg 43 mc 0,358	
EKTOR 3000 MIDIPILAR/VIVI400 2L V50.364.A20	AKILLE 3000 MIDIPILAR/VIVI400 2L V50.414.A20
Pcs 1 Kg 39,6 mc 0,332	

1220

4255
3755
3255

EKTOR3000 AKILLE4000

Ø 265

EKTOR 4000 MIDIPILAR/VIVI400 3L V50.371.A30	AKILLE 4000 MIDIPILAR/VIVI400 3L V50.421.A30
Pcs 1 Kg 52 mc 0,576	
EKTOR 3500 MIDIPILAR/VIVI400 3L V50.367.A30	AKILLE 3500 MIDIPILAR/VIVI400 3L V50.417.A30
Pcs 1 Kg 48,6 mc 0,55	
EKTOR 3000 MIDIPILAR/VIVI400 3L V50.364.A30	AKILLE 3000 MIDIPILAR/VIVI400 3L V50.414.A30
Pcs 1 Kg 45,2 mc 0,523	

1135

4255
3755
3255

EKTOR4000 AKILLE3000

Ø 265

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOVIVI 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto.

Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.




EV4.000.C6K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





ECOVIVI 400 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.



Decorative connection **RING** to be fixed on the luminaries diffuser.



ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

ECOVIVI 400 GX53 LED

EV4.000 *



Dimensions and weight

Height: 243 mm
Diameter: 480 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	6x 10W 60W	7740 lm	6500 K	.D6K
			4000 K	
			3000 K	

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE



ECOVIVI 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 37 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOVIVI 400 E27

LARGE SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 - Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e completo di parabola riflettente in alluminio per dirigere il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 - Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.



EV4.000.E27





ECOVIVI 400 E27 - E40 - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

ECOVIVI 400 E27

EV4.000 *



Dimensions and weight

Height: 243 mm
Diameter: 480 mm
Weight: 3,4 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

E27-E40



*ADD. SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE




ECOVIVI 400 E27
HQI 70W

POST height 3,5mt
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

HORIZONTAL BULB

AGAINST LIGHT POLLUTION




E27 - E40 VERSION

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOVIVI 400

LARGE SIZE





LUIGI 400
L4F.128

Pcs 1
Kg 3,7
mc 0,09

*rope not included

NEW LOT/ECOVIVI400
EV4.115

Pcs 1
Kg 4,9
mc 0,071

ECOVIVI 400
EV4.000

Pcs 1
Kg 4,6
mc 0,09

MIDIPIALAR/ECOVIVI400
EV4.254

Pcs 1
Kg 5,2
mc 0,092

MARIO/ECOVIVI400
EV4.129

Pcs 1
Kg 4,9
mc 0,07

*rope not included

EKTOR 4000 MIDIPIALAR/ECOVIVI400 1L	AKILLE 4000 MIDIPIALAR/ECOVIVI400 1L
EV4.371.A10	EV4.421.A10
Pcs 1 Kg 40,5 mc 0,314	
EKTOR 3500 MIDIPIALAR/ECOVIVI400 1L	AKILLE 3500 MIDIPIALAR/ECOVIVI400 1L
EV4.367.A10	EV4.417.A10
Pcs 1 Kg 37,1 mc 0,284	

EKTOR 2500 MIDIPIALAR/ECOVIVI400 1L
EV4.361.A10

Pcs 1
Kg 30,3
mc 0,235

EKTOR 3000 MIDIPIALAR/ECOVIVI400 1L	AKILLE 3000 MIDIPIALAR/ECOVIVI400 1L
EV4.364.A10	EV4.414.A10
Pcs 1 Kg 33,7 mc 0,262	

Pcs 1
Kg 33,7
mc 0,262

Pcs 1
Kg 37,1
mc 0,284

ECOVIVI 400

LARGE SIZE



EV4.254.C6K




EV4.364.A20.D6K



EV4.421.A30.D6K





EKTOR 2500 MIDIPILAR/ECOVIVI400 3L
EV4.361.A30

Pcs 1
Kg 41
mc 0,497

1120

2755

EKTOR 2500 MIDIPILAR/ECOVIVI400 2L
EV4.361.A20

Pcs 1
Kg 35,7
mc 0,306

1220

2755

Ø 265

EKTOR 4000 MIDIPILAR/ECOVIVI400 2L	AKILLE 4000 MIDIPILAR/ECOVIVI400 2L
EV4.371.A20	EV4.421.A20
Pcs 1 Kg 46 mc 0,385	
EKTOR 3500 MIDIPILAR/ECOVIVI400 2L	AKILLE 3500 MIDIPILAR/ECOVIVI400 2L
EV4.367.A20	EV4.417.A20
Pcs 1 Kg 42,5 mc 0,358	
EKTOR 3000 MIDIPILAR/ECOVIVI400 2L	AKILLE 3000 MIDIPILAR/ECOVIVI400 2L
EV4.364.A20	EV4.414.A20
Pcs 1 Kg 39,1 mc 0,332	

1220

4255
3755
3255

EKTOR3000 AKILLE4000

EKTOR 4000 MIDIPILAR/ECOVIVI400 3L	AKILLE 4000 MIDIPILAR/ECOVIVI400 3L
EV4.371.A30	EV4.421.A30
Pcs 1 Kg 51,1 mc 0,576	
EKTOR 3500 MIDIPILAR/ECOVIVI400 3L	AKILLE 3500 MIDIPILAR/ECOVIVI400 3L
EV4.367.A30	EV4.417.A30
Pcs 1 Kg 47,7 mc 0,55	
EKTOR 3000 MIDIPILAR/ECOVIVI400 3L	AKILLE 3000 MIDIPILAR/ECOVIVI400 3L
EV4.364.A30	EV4.414.A30
Pcs 1 Kg 44,3 mc 0,523	

1120

4255
3755
3255

EKTOR4000 AKILLE3000

Ø 265

BEPPE 400 HIGH POWER LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



P50.000.H1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°


90%
HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER
SILICONE
PROTECTION







BEPPE 400 HIGH POWER LED - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

BEPPE 400 HIGH POWER LED

P50.000 *



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 4 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal



HIGH POWER LED





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27 	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27 	50 W	6550 lm	4000 K	.H1L
			3000 K	

PHOTOMETRIC DATA SAMPLE



BEPPE 400 E27 HIGH POWER LED 50W

POST height 3,5mt
10x10mt area: average 21 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP^(*)



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (30W only)

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Equipped with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED modular system. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.



P50.000.D6K

CCT SETTABLE

SDCM <6

3000 K 4000 K 6500 K


CE CB IECB SCHEME UV UV-TREATED CLASS II DOUBLE INSULATION

PUBLIC ZONE 2

RECYCLABLE ANTI-SHOCK TEMPERATURE +90° -60°

POST





BEPPE 400 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

BEPPE 400 GX53 LED

P50.000 *



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 5 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal


GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	6x 10W 60W	7740 lm	6500 K 4000 K 3000 K	.D6K

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

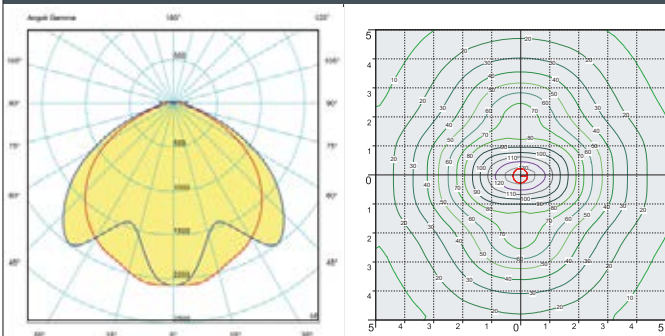

BEPPE 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 37 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 400 E27

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.


Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.



P50.000.E27

RECYCLABLE	ANTISHOCK	TEMPERATURE	POST	





BEPPE 400 E27 - E40 - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 3,7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

E27-E40



*ADD. SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE



BEPPE 400 E27
HQI 70W

POST height 3,5mt
10x10mt area: average 20 lux

The photometric data for all the versions are available upon request or on our website.

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 400

LARGE SIZE



P50.414.H1L



P50.367.C6K




P50.115.Q1K



P50.361.H1L





NEW LOT/BEPPE400
P50.115

Pcs 1
Kg 5,3
mc 0,119

BEPPE400
P50.000

Pcs 1
Kg 5
mc 0,113

EKTOR 2500/BEPPE400
P50.361.000

Pcs 1
Kg 29,3
mc 0,256

EKTOR 3000/ BEPPE400	AKILLE 3000/ BEPPE400
P50.364.000	P50.414.000
Pcs 1 Kg 32,7 mc 0,282	

EKTOR 3500/ BEPPE400	AKILLE 3500/ BEPPE400
P50.367.000	P50.417.000
Pcs 1 Kg 36,1 mc 0,309	

EKTOR 4000/ BEPPE400	AKILLE 4000/ BEPPE400
P50.371.000	P50.421.000
Pcs 1 Kg 39,5 mc 0,335	

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOBEPPE 400 GX53 LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.




EP5.000.D6K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





ECOBEPPE 400 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

ECOBEPPE 400 GX53 LED

EP5.000 *



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 4,7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear


GX53 LED





- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	6x 10W 60W	7740 lm	6500 K 4000 K 3000 K	.D6K

PHOTOMETRIC DATA SAMPLE



ECOBEPPE 400 GX53 LED 6X10W

POST height 3,5mt
10x10mt area: average 37 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOBEPPE 400 E27

LARGE SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 – Intallation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.



EP5.000.E27





ECOBEPPE 400 E27 - E40 - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 108119. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 3,4 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

E27-E40



*ADD SUFFIX



suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

Luminaries supplied with E27 or E40 lampholder.

PHOTOMETRIC DATA SAMPLE



ECOBEPPE 400 E27
HQI 70W

POST height 3,5mt
10x10mt area: average 20 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOBEPPE 400

LARGE SIZE



EP5.367.D6K




EP5.115.D6K



EP5.417.D6K





NEW LOT/ECOBEPPE400
EP5.115

Pcs 1
Kg 5
mc 0,119

ECOBEPPE400
EP5.000

Pcs 1
Kg 4,7
mc 0,113

EKTOR 2500/ECOBEPPE400
EP5.361.000

Pcs 1
Kg 29,3
mc 0,256

EKTOR 3000/ECOBEPPE400	AKILLE 3000/ECOBEPPE400
EP5.364.000	EP5.414.000
Pcs 1 Kg 32,7 mc 0,282	

EKTOR 3500/ECOBEPPE400	AKILLE 3500/ECOBEPPE400
EP5.367.000	EP5.417.000
Pcs 1 Kg 36,1 mc 0,309	

EKTOR 4000/ECOBEPPE400	AKILLE 4000/ECOBEPPE400
EP5.371.000	EP5.421.000
Pcs 1 Kg 39,5 mc 0,335	

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 400 HIGH POWER LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



R50.000.Q1K

E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

MADE IN ITALY



REMO 400 HIGH POWER LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampana E27 e provvisto di lampada a LED ad **ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

BASE made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation.

BASE dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno.

REMO 400 GX53 LED



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

HIGH POWER LED





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V				
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27 	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27 	50 W	6550 lm	4000 K	.H1L
			3000 K	

PHOTOMETRIC DATA SAMPLE




REMO 400 E27 HIGH POWER LED 50W


POST height 3,5mt
10x10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

DOWNWARD LIGHT EMISSION



CCT SETTABLE LED LAMP^(*)



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (30W only)

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED modular system. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza. Classe di isolamento II, grado di protezione IP55.




R50.000.D6K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





REMO 400 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made in shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin **CONE REFLECTOR**, to direct downwards the lighting output.

BASE dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un **CONO** riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.

REMO 400 GX53 LED

R50.000 *



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.


GX53 LED





- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	6x 10W 60W	7740 lm	6500 K	.D6K
			4000 K	
			3000 K	

PHOTOMETRIC DATA SAMPLE




REMO 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 34 lux

The photometric data for all the versions are available upon request or on our website.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 400 E27

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP55.


Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP55.



R50.000.E27FC6

RECYCLABLE	ANTISHOCK	TEMPERATURE	WALL POST





REMO 400 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made in shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA riflettente realizzata in alluminio anodizzato, fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Resin **BASE** consisting of a support (Ø 60mm) and of a cover provided with E27 or E40 lampholder on its upper side.

BASE in resina composta da un supporto e da un coperchio nella cui parte superiore si trova l'alloggiamento per il portalampada E27 o E40 (incluso).



REMO 400 E27
R50.000 *
Height: 715 mm
Diameter: 480 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:
Black White Grey
Diffuser PMMA:
Clear Opal



E27-E40


*ADD. SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED max 50W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

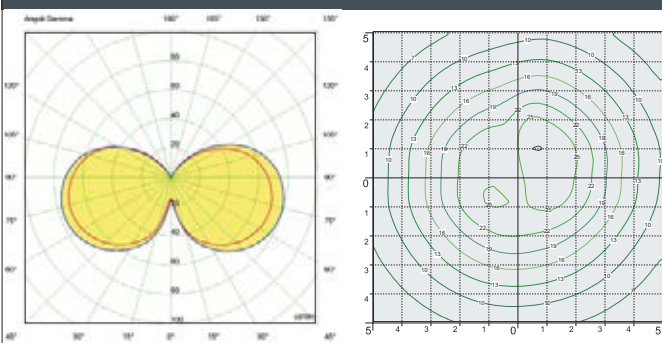

REMO 400 E27- opal
30W High Power LED

POST height 3,5mt
10x10mt area: average 5 lux

The photometric data for all the versions are available upon request or on our website.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

REMO 400

LARGE SIZE



MADE IN ITALY



MIDIPILAR/REMO400
R50.254

Pcs 1
Kg 6,4
mc 0,09

NEW LOT/REMO400
R50.115

Pcs 1
Kg 6,1
mc 0,07

REMO400
R50.000

Pcs 1
Kg 5,8
mc 0,06

EKTOR 2500/REMO400
R50.361.000

Pcs 1
Kg 30,1
mc 0,21

Ø 265

EKTOR 3000/REMO400 R50.364.000	AKILLE 3000/REMO400 R50.414.000
--	---

Pcs 1
Kg 33,5
mc 0,241

Ø 265

EKTOR 3500/REMO400 R50.367.000	AKILLE 3500/REMO400 R50.417.000
--	---

Pcs 1
Kg 26,9
mc 0,268

Ø 265

EKTOR 4000/REMO400 R50.371.000	AKILLE 4000/REMO400 R50.421.000
--	---

Pcs 1
Kg 40,3
mc 0,294

Ø 265

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 400 HIGH POWER LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



F50.000.Q1K

E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION





GINO 400 HIGH POWER LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

BASE made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation.

BASE dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sul cui viene fissato il diffusore interno.

GINO 400 HIGH POWER LED

F50.000 *



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

HIGH POWER LED




- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.


Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V				
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
CCT SET LED E27 	30 W	3620 lm	4000 K	.Q1K
			3000 K	
LED E27 	50 W	6550 lm	4000 K	.H1L
			3000 K	

DOWNWARD LIGHT EMISSION




CCT SETTABLE LED LAMP(*)



CCT switch settable in two different positions, to select the desired Kelvin temperature (3000K/4000K) and get a customized ambiance. (30W only)

PHOTOMETRIC DATA SAMPLE

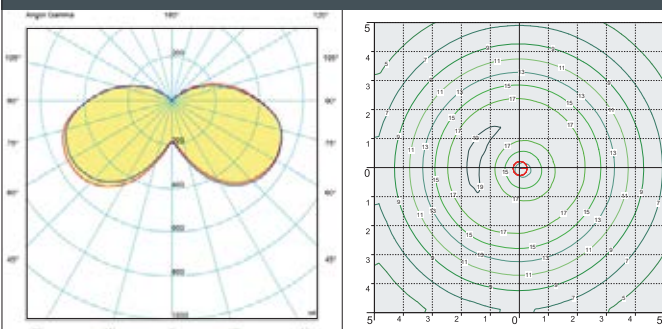

GINO 400 E27 HIGH POWER LED 50W

POST height 3,5mt
10x10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED modular system in different wattages. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Classe di isolamento II, grado di protezione IP55.




F50.000.D6K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





GINO 400 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin **CONE REFLECTOR**, to direct downwards the lighting output.

BASE dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un **CONO** riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.

GINO 400 GX53 LED

F50.000 *



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED




- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6X TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


100 - 240 V				
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	6x 10W 60W	7740 lm	6500 K	.D6K
			4000 K	
			3000 K	

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

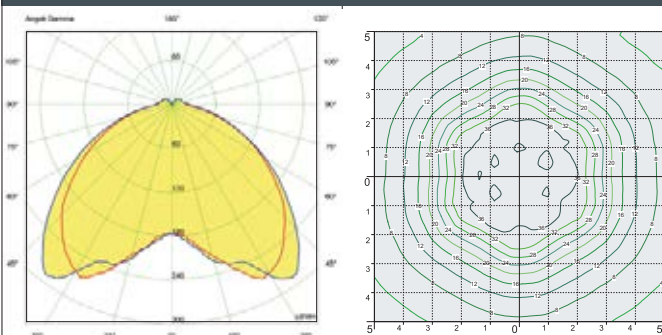

GINO 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 34 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 400 E27

LARGE SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP55.



F50.000.E27FC6





GINO 400 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA riflettente realizzata in alluminio anodizzato fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Resin **BASE** consisting of a support (Ø 60mm) and of a cover provided with E27 or E40 lampholder on its upper side.

BASE in resina composta da un supporto e da un coperchio nella cui parte superiore si trova l'alloggiamento per il portalamпада E27 o E40 (incluso).



GINO 400 E27

Height: 715 mm
Diameter: 480 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

CHROME ALUMINIUM LOUVRE

H.FC6 open
Upward position



E27-E40


*ADD SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED max 50W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

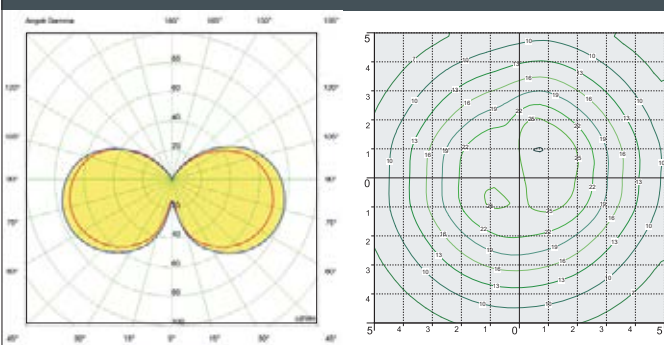

GINO 400 E27 - opal
30W High Power LED

POST height 3,5mt
10x10mt area: average 5 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GINO 400

LARGE SIZE



F50.364.D6K



F50.115.Q1K




F50.254.H1L



F50.417.H1L





MIDIPILAR/GINO400
F50.254

Pcs 1
Kg 6,4
mc 0,09

NEW LOT/GINO400
F50.115

Pcs 1
Kg 6,1
mc 0,07

GINO400
F50.000

Pcs 1
Kg 5,8
mc 0,06

EKTOR 2500/GINO400
F50.361.000

Pcs 1
Kg 30,1
mc 0,21

EKTOR 3000/GINO400	AKILLE 3000/GINO400
F50.364.000	F50.414.000
Pcs 1 Kg 33,5 mc 0,24	

EKTOR 3500/GINO400	AKILLE 3500/GINO400
F50.367.000	F50.417.000
Pcs 1 Kg 26,9 mc 0,26	

EKTOR 4000/GINO400	AKILLE 4000/GINO400
F50.371.000	F50.421.000
Pcs 1 Kg 40,3 mc 0,29	

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 500 HIGH POWER LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included.** Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

V60.000.W1L



E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION





VIVI 500 HIGH POWER LED - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di **lampada a LED ad ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

VIVI 500 HIGH POWER LED

V60.000 *



Dimensions and weight

Height: 600 mm
Diameter: 600 mm
Weight: 7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,1932

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal



HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27 	50 W	6550 lm	4000 K	.H1L
			3000 K	.H1R
E27 	60 W	7600 lm	4000 K	.W1L
			3000 K	.W1R

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

PHOTOMETRIC DATA SAMPLE

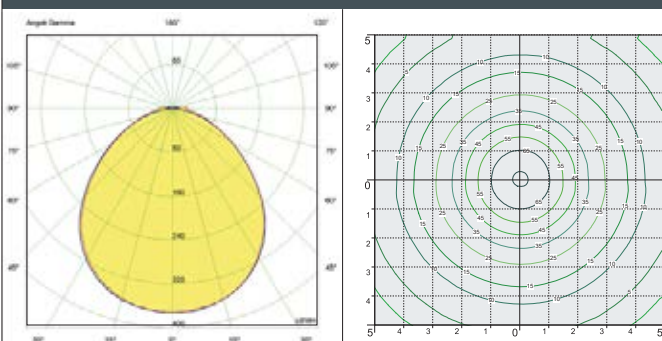

VIVI 500 E27 HIGH POWER LED 60W

POST height 5mt
10x10mt area: average 27 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.



V60.000.D9K

CCT SETTABLE

SDCM <6

3000 K 4000 K 6500 K


CE CB IECB SCHEME UV UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK TEMPERATURE +90° -60°

PUBLIC ZONE 2

WALL POST HANGING





VIVI 500 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.



Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight
Height: 600 mm
Diameter: 600 mm
Weight: 7,7 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,1932


Moulded colours:
Black White Grey
Diffuser PMMA:
Clear Opal

GX53 LED





- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 9x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V				
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	9x 10W 90W	11610 lm	6500 K 4000 K 3000 K	.D9K

PHOTOMETRIC DATA SAMPLE



VIVI 500 GX53 LED
9X10W

POST height 5mt
10x10mt area: average 34 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

VIVI 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.



V60.000.E27





VIVI 500 E27 - E40 - COMPONENTS

IP55




ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

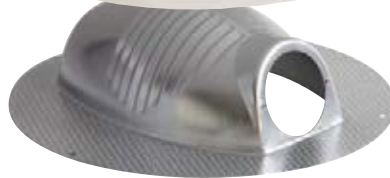

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight

Height: 600 mm
Diameter: 600 mm
Weight: 6 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,1932

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

E27-E40

*ADD. SUFFIX




Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40


HORIZONTAL BULB

AGAINST LIGHT POLLUTION



E27 - E40 VERSION

PHOTOMETRIC DATA SAMPLE

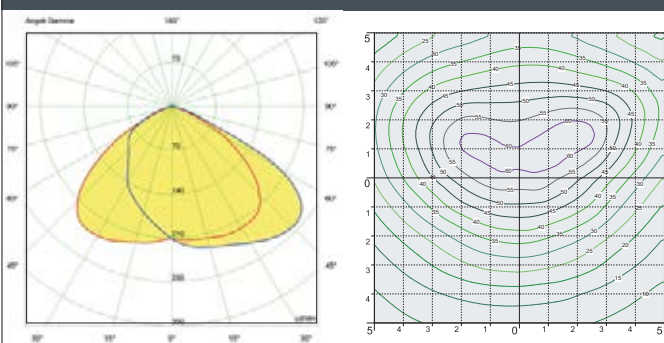


VIVI 500 E27
HQI 150W


POST height 5mt
10x10mt area: average 35 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

VIVI 500
GRAND SIZE

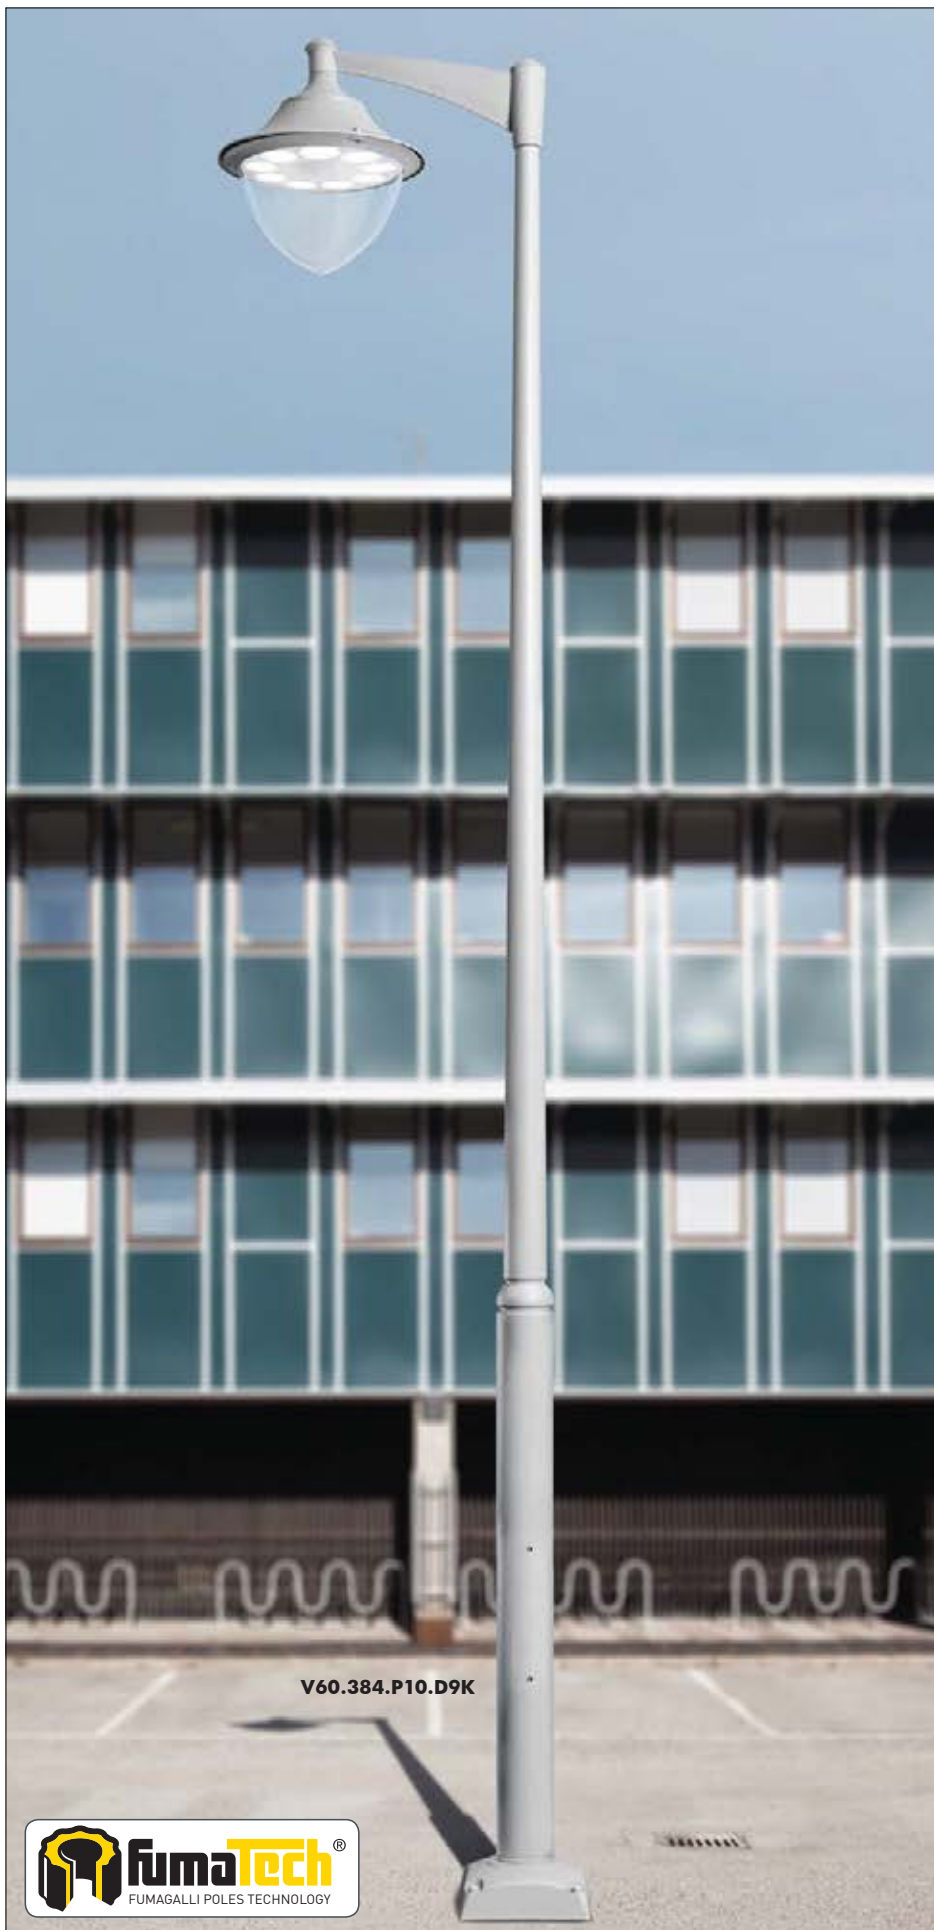



VIVI 500
V60.000

Ø 600
600

Pcs 1
Kg 7,7
mc 0,10

LUIGI 500-DR
L51.128

680
600

Pcs 1
Kg 7,7
mc 0,10

*rope not included

PILAR/VIVI500
V60.253

920
650

Pcs 1
Kg 9,7
mc 0,15

NEW LOT/VIVI500
V60.115

600
710

Pcs 1
Kg 8,7
mc 0,13

MARIO/VIVI500
V60.129

600
600

Pcs 1
Kg 7,1
mc 0,11

*rope not included

EKTOR 6000 PILAR/VIVI500 2L
V60.384.P20

1800
6220
400

Pcs 1
Kg 94,6
mc 1,46

EKTOR 6000 PILAR/VIVI500 1L
V60.384.P10

1030
6220
400


Pcs 1
Kg 86,2
mc 1,36

VIVI 500

GRAND SIZE



MADE IN ITALY



EKTOR 5000 PILAR/VIVI500 1L V60.377.P10	AKILLE 5000 PILAR/VIVI500 1L V60.427.P10
Pcs 1 Kg 55,7 mc 0,43	
EKTOR 4500 PILAR/VIVI500 1L V60.374.P10	AKILLE 4500 PILAR/VIVI500 1L V60.424.P10
Pcs 1 Kg 50,2 mc 0,40	
EKTOR 4000 PILAR/VIVI500 1L V60.371.P10	AKILLE 4000 PILAR/VIVI500 1L V60.421.P10
Pcs 1 Kg 44,7 mc 0,37	

EKTOR 5000 PILAR/VIVI500 2L V60.377.P20	AKILLE 5000 PILAR/VIVI500 2L V60.427.P20
Pcs 1 Kg 65,1 mc 0,60	
EKTOR 4500 PILAR/VIVI500 2L V60.374.P20	AKILLE 4500 PILAR/VIVI500 2L V60.424.P20
Pcs 1 Kg 59,6 mc 0,57	
EKTOR 4000 PILAR/VIVI500 2L V60.371.P20	AKILLE 4000 PILAR/VIVI500 2L V60.421.P20
Pcs 1 Kg 54,1 mc 0,54	

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOVIVI 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** i. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV -CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.




EV6.000.D9K

CCT SETTABLE

SDCM <6

3000 K 4000 K 6500 K





ECOVIVI 500 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC), stabilizzato ai raggi UV.



Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.



ECOVIVI 500 GX53 LED

EV6.000 *



Dimensions and weight

Height: 300 mm
Diameter: 600 mm
Weight: 6,7 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,0982

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear


GX53 LED





- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin **CEILING** provided with 9x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	9x 10W 90W	11610 lm	6500 K 4000 K 3000 K	.D9K

PHOTOMETRIC DATA SAMPLE



ECOVIVI 500 GX53 LED
9X10W

POST height 5mt
10x10mt area: average 38 lux


The photometric data for all the versions are available upon request or on our website.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOVIVI 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 - Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 - Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.



EV6.000.E27

MADE IN ITALY



ECOVIVI 500 E27 - E40 - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.



Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.



DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.



Decorative connection **RING** to be fixed on the luminaries diffuser. **ANELLO** decorativo da fissare sul diffusore dell'apparecchio.

ECOVIVI 500 E27

EV6.000 *



Dimensions and weight

Height: 300 mm
Diameter: 600 mm
Weight: 5 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,0982

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

E27-E40

*ADD. SUFFIX




Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40


HORIZONTAL BULB

AGAINST LIGHT POLLUTION



E27 - E40 VERSION

PHOTOMETRIC DATA SAMPLE

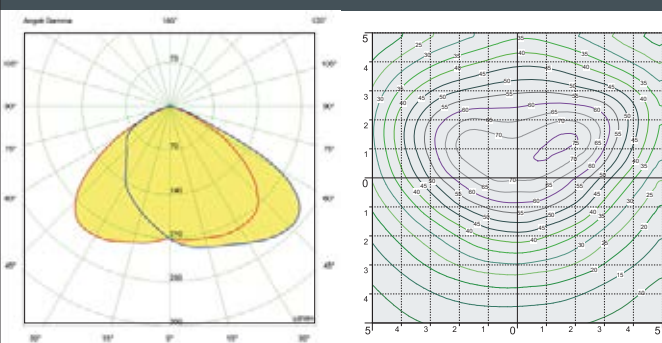

ECOVIVI 500 E27
HQI 150W

POST height 5mt
10x10mt area: average 38 lux


The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOVIVI 500

GRAND SIZE





ECOVIVI 500
EV6.000

Pcs 1
Kg 6,7
mc 0,06

LUIGI 500
L5F.128

*rope not included

Pcs 1
Kg 3,7
mc 0,09

NEW LOT/ECOVIVI500
EV6.115

Pcs 1
Kg 4,9
mc 0,09

PILAR/ECOVIVI500
EV6.253

Pcs 1
Kg 8,7
mc 0,11

MARIO/ECOVIVI500
EV6.129

*rope not included

Pcs 1
Kg 4,9
mc 0,09

EKTOR 6000 PILAR/ECOVIVI500 2L
EV6.384.P20


Pcs 1
Kg 92,6
mc 1,42


EKTOR 6000 PILAR/ECOVIVI500 1L
EV6.384.P10

Pcs 1
Kg 84,2
mc 1,32

ECOVIVI 500

GRAND SIZE

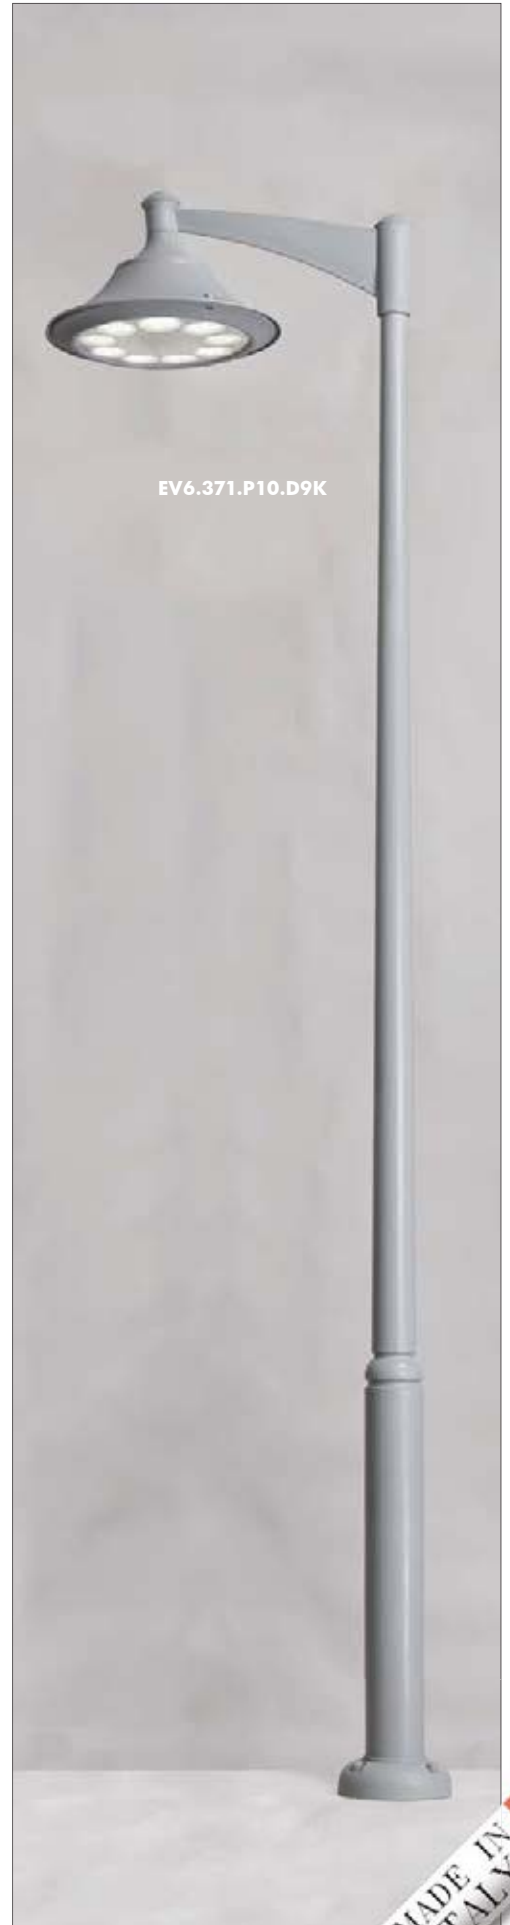



EKTOR 5000 PILAR/ECOVIVI500 1L EV6.377.P10	AKILLE 5000 PILAR/ECOVIVI500 1L EV6.427.P10
Pcs 1 Kg 54,7 mc 0,39	
EKTOR 4500 PILAR/ECOVIVI500 1L EV6.374.P10	AKILLE 4500 PILAR/ECOVIVI500 1L EV6.424.P10
Pcs 1 Kg 49,2 mc 0,37	
EKTOR 4000 PILAR/ECOVIVI500 1L EV6.371.P10	AKILLE 4000 PILAR/ECOVIVI500 1L EV6.421.P10
Pcs 1 Kg 43,7 mc 0,35	

EKTOR 5000 PILAR/ECOVIVI500 2L EV6.377.P20	AKILLE 5000 PILAR/ECOVIVI500 2L EV6.427.P20
Pcs 1 Kg 63,1 mc 0,49	
EKTOR 4500 PILAR/ECOVIVI500 2L EV6.374.P20	AKILLE 4500 PILAR/ECOVIVI500 2L EV6.424.P20
Pcs 1 Kg 57,6 mc 0,47	
EKTOR 4000 PILAR/ECOVIVI500 2L EV6.371.P20	AKILLE 4000 PILAR/ECOVIVI500 2L EV6.421.P20
Pcs 1 Kg 52,1 mc 0,45	

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 500 HIGH POWER LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



P50.000.H1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE











+80°C
-30°

90% HUMIDITY


VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION







BEPPE 500 HIGH POWER LED - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

BEPPE 500 HIGH POWER LED

P60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 7.5 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,246

Moulded colours:

Black White Grey

Diffuser PMMA:



Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27 	50 W	6550 lm	4000 K	.H1L
			3000 K	.H1R
E27 	60 W	7600 lm	4000 K	.W1L
			3000 K	.W1R



Luminaries equipped with TÜV-CB certified, long-life and efficient E27 high power LED lamp, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

PHOTOMETRIC DATA SAMPLE



BEPPE 500 E27 HIGH POWER LED 60W

POST height 5mt
10x10mt area: average 25 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

BEPPE 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED modular system. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.




P60.000.D9K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM < 6





BEPPE 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

BEPPE 500 GX53 LED

P60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 9,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal


GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	9x 10W 90W	11610 Lm	6500 K 4000 K 3000 K	.D9K

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



BEPPE 500 GX53 LED 9X10W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.

P60.000.E27







BEPPE 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

E27-E40


*ADD. SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

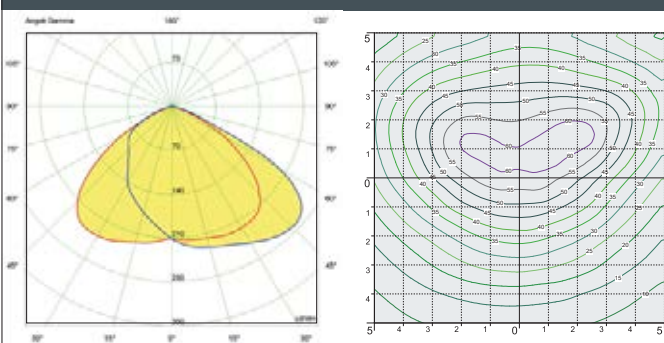

BEPPE 500 E27
HQI 150W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

BEPPE 500

GRAND SIZE




P60.371.W1R

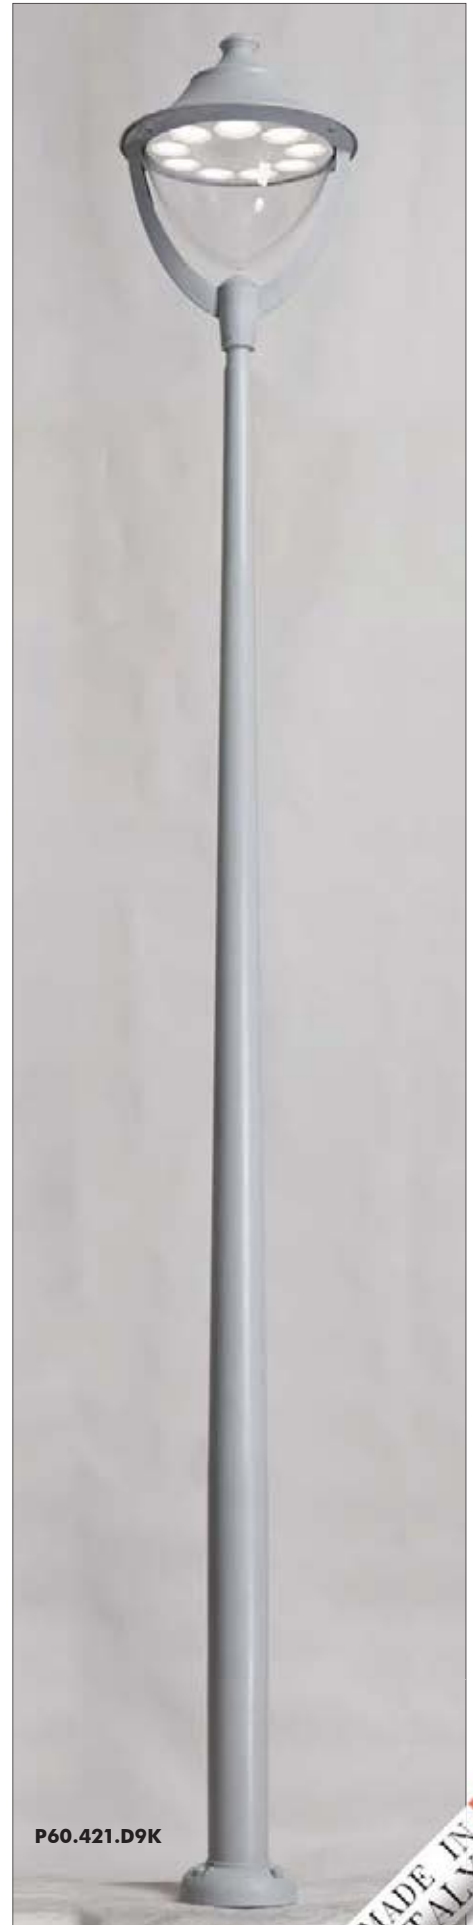

P60.421.D9K





EKTOR 6000/BEPPE500
P60.384.000

600

Pcs 1
Kg 84,1
mc 1,41

6735

400

EKTOR 5000/BEPPE500 P60.377.000	AKILLE 5000/BEPPE500 P60.427.000
Pcs 1 Kg 54,6 mc 0,48	
EKTOR 4500/BEPPE500 P60.374.000	AKILLE 4500/BEPPE500 P60.424.000
Pcs 1 Kg 49,1 mc 0,46	

600

5735
5235

600

Ø 265

EKTOR5000

AKILLE4500

EKTOR 4000/BEPPE500 P60.371.000	AKILLE 4000/BEPPE500 P60.421.000
Pcs 1 Kg 43,6 mc 0,43	
EKTOR 3500/BEPPE500 P60.367.000	AKILLE 3500/BEPPE500 P60.417.000
Pcs 1 Kg 40,2 mc 0,40	
EKTOR 3000/BEPPE500 P60.364.000	AKILLE 3000/BEPPE500 P60.414.000
Pcs 1 Kg 36,8 mc 0,38	

600

600

4735
4235
3735

600

Ø 265

EKTOR4000

AKILLE3500

BEPPE500
P60.000

600

Pcs 1
Kg 9,1
mc 0,20

850

Ø 60

PILAR/BEPPE500
P60.253

Pcs 1
Kg 11,1
mc 0,24

920

1250

NEW LOT/BEPPE500
P60.115

Pcs 1
Kg 9,4
mc 0,21

600

960

ECOBEPPE 500 GX53 LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin regolabile certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.




EP6.000.D9K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





ECOBEPPE 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC), stabilizzato ai raggi UV.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

ECOBEPPE 500 GX53 LED

EP6.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 8,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear


GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and 9x Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	9x 10W 90W	11610 Lm	6500 K 4000 K 3000 K	.D9K

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



ECOBEPPE 500 GX53 LED 9X10W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE


ECOBEPPE 500 E27


GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.

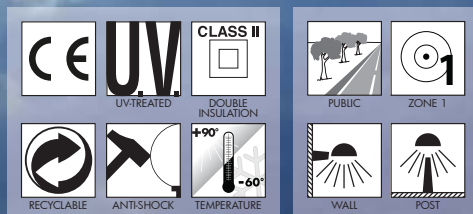EP6.000.E27



ECOBEPPE 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.
TETTO completo di pinnacolo decorativo realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in polycarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in polycarbonato (PC), stabilizzato ai raggi UV.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

ECOBEPPE 500 E27



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 6,5Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

E27-E40


*ADD. SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

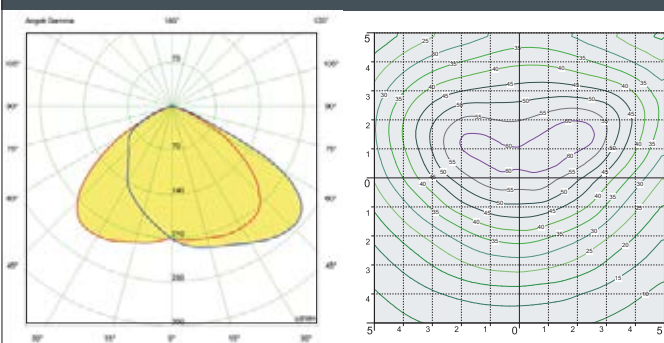

BEPPE 500 E27
HQI 150W


POST height 5mt
10x10mt area: average 31 lux


The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOBEPPE 500

GRAND SIZE

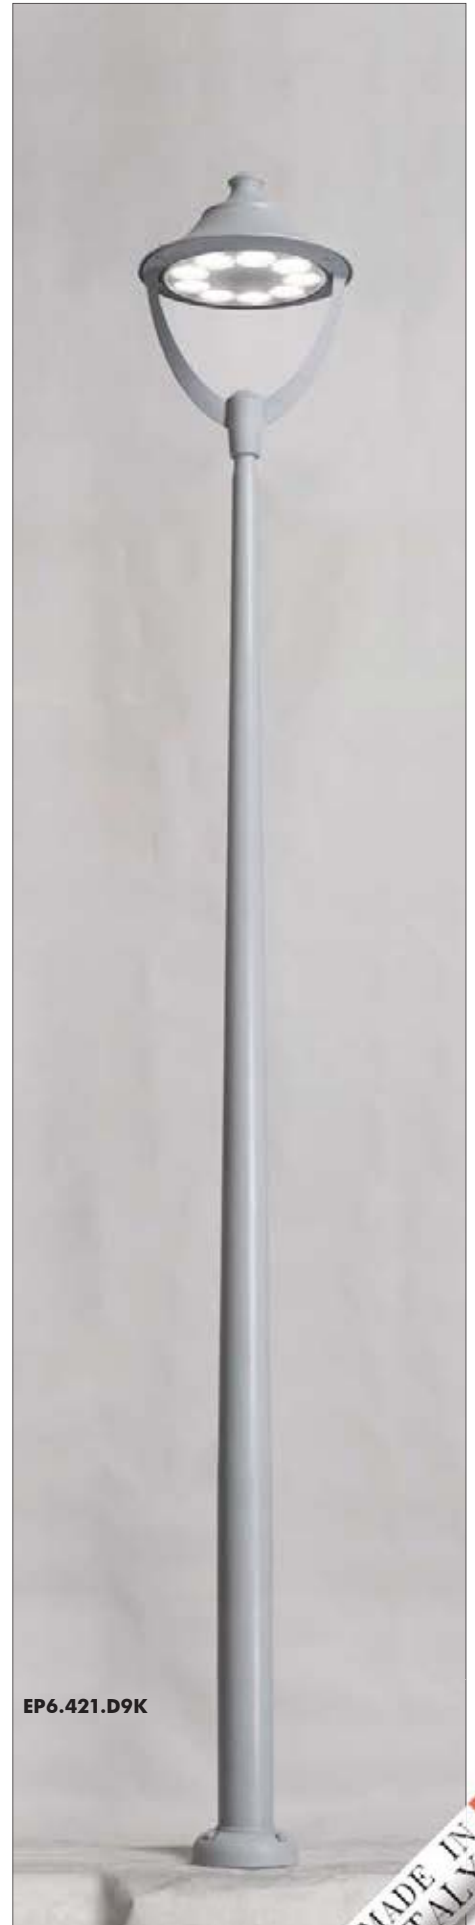

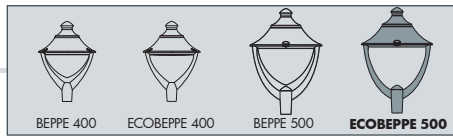

EKTOR 6000/ECOBEPPE500
EP6.384.000

600

Pcs 1
Kg 83,1
mc 1,41

6735

400

EKTOR 5000/ECOBEPPE500 EP6.377.000	AKILLE 5000/ECOBEPPE500 EP6.427.000
Pcs 1 Kg 53,6 mc 0,48	
EKTOR 4500/ECOBEPPE500 EP6.374.000	EKTOR 4500/ECOBEPPE500 EP6.424.000
Pcs 1 Kg 48,1 mc 0,46	

600

600

5735
5235

← EKTOR5000
AKILLE4500 →

Ø 265

EKTOR 4000/ECOBEPPE500 EP6.371.000	AKILLE 4000/ECOBEPPE500 EP6.421.000
Pcs 1 Kg 42,6 mc 0,43	
EKTOR 3500/ECOBEPPE500 EP6.367.000	AKILLE 3500/ECOBEPPE500 EP6.417.000
Pcs 1 Kg 39,2 mc 0,40	
EKTOR 3000/ECOBEPPE500 EP6.364.000	AKILLE 3000/ECOBEPPE500 EP6.414.000
Pcs 1 Kg 35,8 mc 0,38	

600

600

4735
4235
3735

← EKTOR4000
AKILLE3500 →

Ø 265

ECOBEPPE500
EP6.000

Pcs 1
Kg 8,1
mc 0,20

600

850

Ø 60

PILAR/ECOBEPPE500
EP6.253

Pcs 1
Kg 10,1
mc 0,24

920

1250

NEW LOT/ECOBEPPE500
EP6.115

Pcs 1
Kg 8,4
mc 0,21

600

960

COMPANY
SOLAR
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 500 HIGH POWER LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



R60.000.W1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION





REMO 500 HIGH POWER LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

BASE made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation.

BASE dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno.

REMO 500 GX53 LED

R60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 9 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,238

Moulded colours:

Black White Grey

Diffuser PMMA:



Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.



100 - 240 V				
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27 	50 W	6550 lm	4000 K	.H1L
			3000 K	.H1R
E27 	60 W	7600 lm	4000 K	.W1L
			3000 K	.W1R

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

PHOTOMETRIC DATA SAMPLE




REMO 500 E27 HIGH POWER LED 60W

POST height 5mt
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

DOWNWARD LIGHT EMISSION



* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Classe di isolamento II, grado di protezione IP55.*




R60.000.D9LK

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





REMO 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin **CONE REFLECTOR**, to direct downwards the lighting output.

BASE dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un **CONO** riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.

REMO 500 GX53 LED

R60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 9 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,238

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal


GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	9x 10W 90W	11610 lm	6500 K 4000 K 3000 K	.D9K

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



REMO 500 GX53 LED 9X10W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

REMO 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP55.



R60.000.E27FC6





REMO 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA riflettente realizzata in alluminio anodizzato, fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Resin **BASE** consisting of a support (Ø 60mm) and of a cover suitable for ballast fixation on its lower side and provided with E27 or E40 lampholder on its upper side.

BASE in resina composta da un supporto e da un coperchio nella cui parte inferiore possono essere fissati i reattori e nella cui parte superiore si trova l'alloggiamento per il portalampada E27 o E40 (incluso).



REMO 500 E27

Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 6,5 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,238

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

CHROME ALUMINIUM LOUVRE

H.FC6 open
Upward position



E27-E40


*ADD. SUFFIX



suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

Luminaries supplied with E27 or E40 lampholder.

PHOTOMETRIC DATA SAMPLE

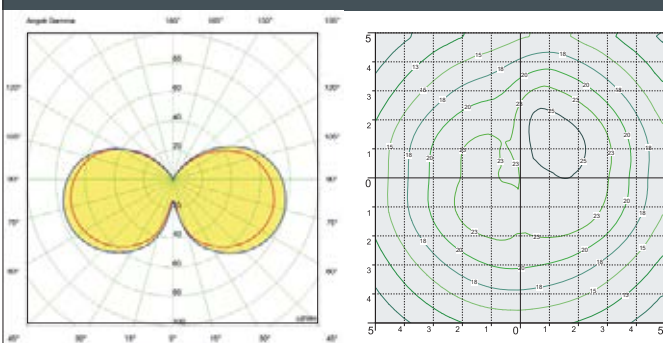

REMO 500 E27
HQI 150W

POST height 5mt
10x10mt area: average 19 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 500

GRAND SIZE



R60.417.D9K



R60.374.W1L




R60.253.W1L



R60.115



MADE IN ITALY



EKTOR 6000/REMO500
R60.384.000

Pcs 1
Kg 84
mc 1,32

600

6735

400

EKTOR 5000/REMO500 R60.377.000	AKILLE 5000/REMO500 R60.427.000
Pcs 1 Kg 54,5 mc 0,39	
EKTOR 4500/REMO500 R60.374.000	AKILLE 4500/REMO500 R60.424.000
Pcs 1 Kg 49 mc 0,36	

600

600

5735
5235

265

← EKTOR5000
AKILLE4500 →

EKTOR 4000/REMO500 R60.371.000	AKILLE 4000/REMO500 R60.421.000
Pcs 1 Kg 43,5 mc 0,33	
EKTOR 3500/REMO500 R60.367.000	AKILLE 3500/REMO500 R60.417.000
Pcs 1 Kg 40,1 mc 0,31	
EKTOR 3000/REMO500 R60.364.000	AKILLE 3000/REMO500 R60.414.000
Pcs 1 Kg 36,7 mc 0,28	

600

600

4735
4235
3735

265

← EKTOR4000
AKILLE3500 →

REMO500
R60.000

Pcs 1
Kg 9
mc 0,11

600

850

Ø 60

PILAR/REMO500
R60.253

Pcs 1
Kg 11
mc 0,14

920

1250

NEW LOT/REMO500
R60.115

Pcs 1
Kg 9,3
mc 0,12

600

960

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 500 HIGH POWER LED

GRAND SIZE




Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



F60.000.W1L





GINO 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampana E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

BASE made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation.

BASE dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno.

GINO 500 E27

F60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 7,3 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,262

Moulded colours:

Black White Grey

Diffuser PMMA:



Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.


100 - 240 V				
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27 	50 W	6550 Lm	4000 K	.H1L
			3000 K	.H1R
E27 	60 W	7600 Lm	4000 K	.W1L
			3000 K	.W1R

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

DOWNWARD LIGHT EMISSION



PHOTOMETRIC DATA SAMPLE

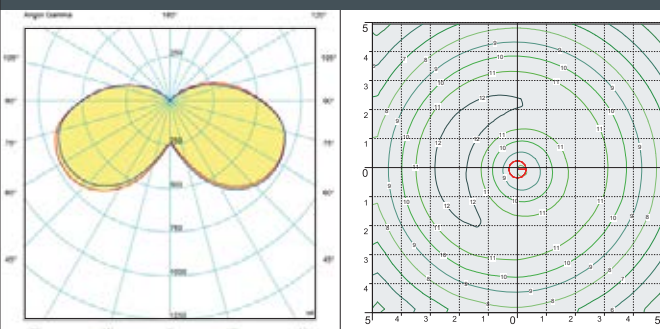

GINO 500 E27 HIGH POWER LED 60W

POST height 5mt
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED modular system. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV -CBdi lunga durata ed alta efficienza. Classe di isolamento II, grado di protezione IP55.




F60.000.D9K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





GINO 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin CONE REFLECTOR, to direct downwards the lighting output.

BASE dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un CONO riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.

GINO 500 GX53 LED

F60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 9,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,262

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	9x 10W 90W	11610 lm	6500 K 4000 K 3000 K	.D9K

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



GINO 500 GX53 LED
9X10W

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP55.



F60.000.E27FC6

MADE IN ITALY



GINO 500 E27 - E40 - COMPONENTS

IP55



ROOF complete with decorative pinnacolo made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA riflettente realizzata in alluminio anodizzato, fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Luminaries **BASE** consisting of a support (Ø 60mm) and of a cover suitable for ballast fixation on its lower side and provided with E27 or E40 lampholder on its upper side.

BASE in resina composta da un supporto e da un coperchio nella cui parte inferiore possono essere fissati i reattori e nella cui parte superiore si trova l'alloggiamento per il portalampana E27 o E40 (incluso).



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 7,3 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,262

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

CHROME ALUMINIUM LOUVRE

H.FC6 open
Upward position




E27-E40

*ADD SUFFIX

	suitable lamps:	E27 Lampholder only	.E27
	CFL-LED SON-HQI max 150W	E40 Lampholder only	.E40
Luminaries supplied with E27 or E40 lampholder.			

PHOTOMETRIC DATA SAMPLE

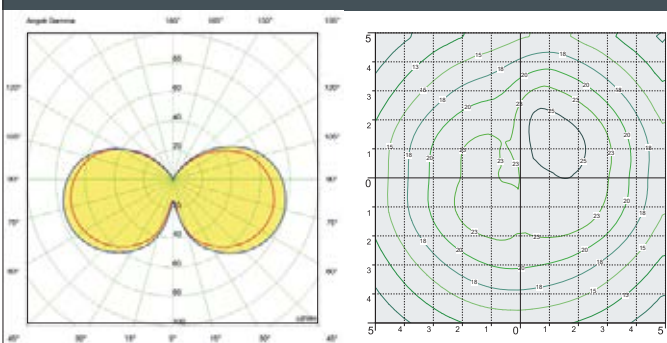

GINO 500 E27
HQI 150W

POST height 5mt
10x10mt area: average 19 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GINO 500


GRAND SIZE



F60.367.D9K



F60.421.W1L

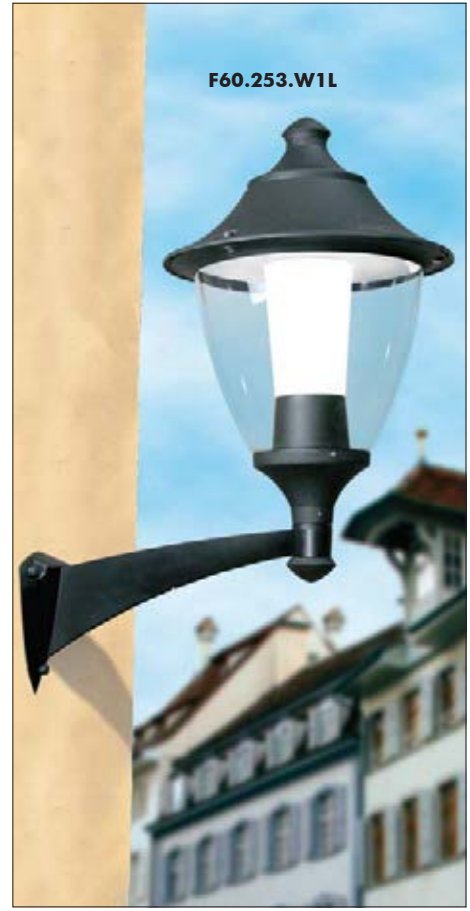


F60.253.W1L



F60.115





EKTOR 6000/GINO 500
F60.384.000

Pcs 1
Kg 84,8
mc 1,32

600

6735

400

EKTOR 5000/GINO 500 F60.377.000	AKILLE 5000/GINO 500 F60.427.000
EKTOR 4500/GINO 500 F60.374.000	AKILLE 4500/GINO 500 F60.424.000

Pcs 1
Kg 55,3
mc 0,39

Pcs 1
Kg 49,8
mc 0,36

600

600

5735
5235

265

EKTOR5000

AKILLE4500

EKTOR 4000/GINO 500 F60.371.000	AKILLE 4000/GINO 500 F60.421.000
EKTOR 3500/GINO 500 F60.367.000	AKILLE 3500/GINO 500 F60.417.000
EKTOR 3000/GINO 500 F60.364.000	AKILLE 3000/GINO 500 F60.414.000

Pcs 1
Kg 44,3
mc 0,33

Pcs 1
Kg 40,9
mc 0,31

Pcs 1
Kg 37,5
mc 0,28

600

600

600

4735
4235
3735

265

EKTOR4000

AKILLE3500

GINO 500
F60.000

Pcs 1
Kg 9,8
mc 0,11

600

850

Ø 60

PILAR/GINO 500
F60.253

Pcs 1
Kg 11,8
mc 0,14

920

1250

NEW LOT/GINO 500
F60.115

Pcs 1
Kg 10,1
mc 0,12

600

960

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 400 MODERN

LARGE SIZE




Ø 400 mm PMMA globe, complete with modern base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Globo Ø 400 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampana E27 e predisposto per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.



G41.B40.E27FC1

MADE IN ITALY




GLOBE 400 MODERN E27 - COMPONENTS

IP55



400 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 400 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

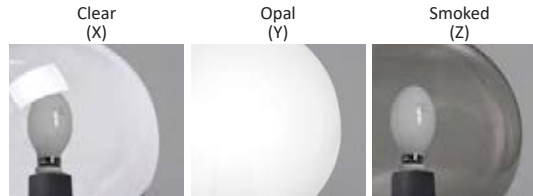

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Globe **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support (Ø 60mm) and of a cover provided with E27 lampholder.

BASE del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalampana E27 (incluso).

GLOBE 400 MODERN

G41.B40 *



Dimensions and weight

Height: 530 mm
Diameter: 400 mm
Weight: 2,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,122

Moulded colours: *

Black White Grey

Diffuser PMMA:

Clear Opal Smoked

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



H.FC6 open
Downward position



E27

*ADD. SUFFIX



suitable lamps:
CFL-LED


max 50W

E27
Lampholder only

.E27

Globe complete with modern base and E27 lampholder.

PHOTOMETRIC DATA SAMPLE

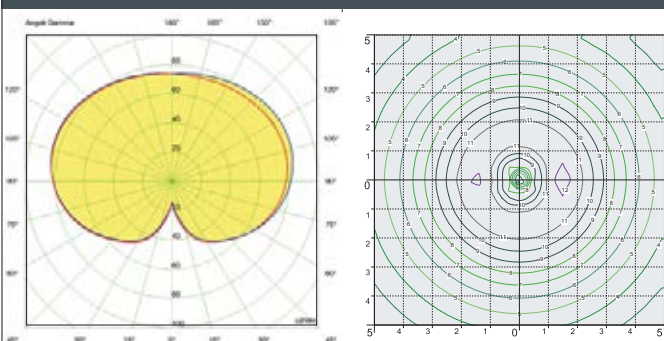

GLOBE 400 E27 - opal
30W High Power LED

POST height 3,5mt
10x10mt area: average 5 lux


The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GLOBE 400 MODERN

LARGE SIZE





EKTOR 2500/GLOBE400
G41.361.000

Pcs 1
Kg 26,4
mc 0,15

400

2915

MIDIPIAR/GLOBE 400
G41.254

Pcs 1
Kg 2,7
mc 0,09

590

640

NEW LOT/GLOBE 400
G41.115

Pcs 1
Kg 2,4
mc 0,07

400

650

GLOBE 400
G41.B40

Pcs 2
Kg 4,2
mc 0,17

400

530

Ø 60

EKTOR 4000 MIDIPIAR/GLOBE400 1L G41.371.A10	AKILLE 4000 MIDIPIAR/GLOBE400 1L G41.421.A10
Pcs 1 Kg 37,9 mc 0,30	
EKTOR 3500 MIDIPIAR/GLOBE400 1L G41.367.A10	AKILLE 3500 MIDIPIAR/GLOBE400 1L G41.417.A10
Pcs 1 Kg 34,5 mc 0,26	
EKTOR 3000 MIDIPIAR/GLOBE400 1L G41.364.A10	AKILLE 3000 MIDIPIAR/GLOBE400 1L G41.414.A10
Pcs 1 Kg 31,1 mc 0,26	

EKTOR 4000/GLOBE400 G41.371.000	AKILLE 4000/GLOBE400 G41.421.000
Pcs 1 Kg 36,6 mc 0,21	
EKTOR 3500/GLOBE400 G41.367.000	AKILLE 3500/GLOBE400 G41.417.000
Pcs 1 Kg 33,2 mc 0,19	
EKTOR 3000 /GLOBE400 G41.364.000	AKILLE 3000 /GLOBE400 G41.414.000
Pcs 1 Kg 29,8 mc 0,17	

**EKTOR 2500
MIDIPIAR/GLOBE400 1L**
G41.361.A10

Pcs 1
Kg 27,7
mc 0,24

705

2755

Ø 265

705

4255
3755
3255

EKTOR3500

AKILLE3000

Ø 265

400

4400
3900
3400

EKTOR3500


AKILLE3000

Ø 265

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 400 MODERN

LARGE SIZE

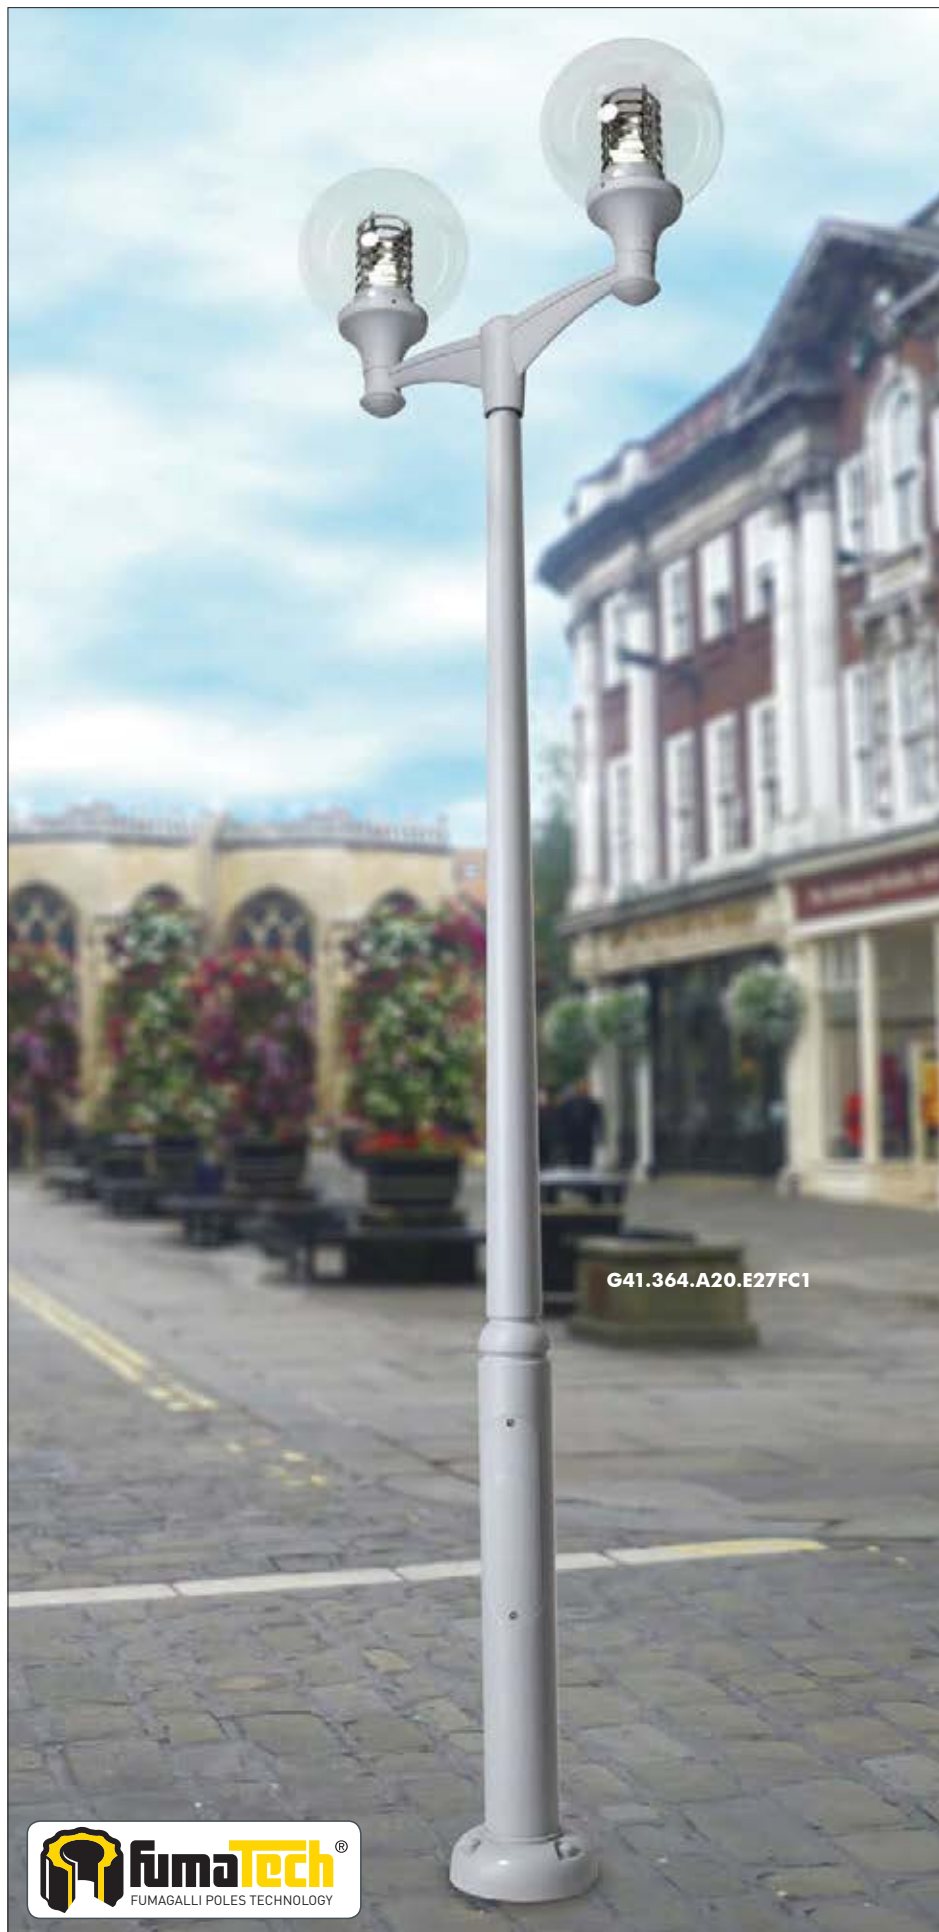


G41.364.A20.E27FC1



G41.414.A30



MADE IN ITALY



**EKTOR 2500
MIDIPIILAR/GLOBE400 3L**
G41.361.A30

Pcs 1
Kg 33,4
mc 0,51

1040

2755

**EKTOR 2500
MIDIPIILAR/GLOBE400 2L**
G41.361.A20

Pcs 1
Kg 30,6
mc 0,42

1140

3115

Ø 265

EKTOR 4000 MIDIPIILAR/GLOBE400 2L G41.371.A20	AKILLE 4000 MIDIPIILAR/GLOBE400 2L G41.421.A20
Pcs 1 Kg 40,8 mc 0,49	
EKTOR 3500 MIDIPIILAR/GLOBE400 2L G41.367.A20	AKILLE 3500 MIDIPIILAR/GLOBE400 2L G41.417.A20
Pcs 1 Kg 37,4 mc 0,47	
EKTOR 3000 MIDIPIILAR/GLOBE400 2L G41.364.A20	AKILLE 3000 MIDIPIILAR/GLOBE400 2L G41.414.A20
Pcs 1 Kg 34 mc 0,45	

1140

1140

4255
3755
3255

Ø 265

EKTOR 4000 MIDIPIILAR/GLOBE400 3L G41.371.A30	AKILLE 4000 MIDIPIILAR/GLOBE400 3L G41.421.A30
Pcs 1 Kg 43,6 mc 0,57	
EKTOR 3500 MIDIPIILAR/GLOBE400 3L G41.367.A30	AKILLE 3500 MIDIPIILAR/GLOBE400 3L G41.417.A30
Pcs 1 Kg 40,2 mc 0,55	
EKTOR 3000 MIDIPIILAR/GLOBE400 3L G41.364.A30	AKILLE 3000 MIDIPIILAR/GLOBE400 3L G41.414.A30
Pcs 1 Kg 36,8 mc 0,53	

1040

1040

4615
4115
3615

Ø 265

COMPANY SOLAR UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 500 MODERN

GRAND SIZE




Ø 500 mm PMMA globe, complete with modern base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Globo Ø 500 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 o E40 e predisposto per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.



G51.B50.E27FC1

MADE IN ITALY




GLOBE 500 MODERN E27 - COMPONENTS

IP55



500 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 500 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

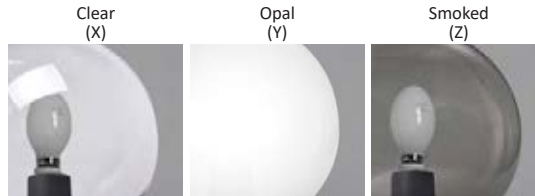

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Globe **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support (Ø 60mm) and of a cover provided with E27 or E40 lampholder.

BASE del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalamпада E27 o E40 (incluso).

GLOBE 500

G51.B50 *



Dimensions and weight

Height: 640 mm
Diameter: 500 mm
Weight: 4 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,181

Moulded colours:



Diffuser PMMA:



CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



H.FC6 open
Downward position



E27-E40


*ADD. SUFFIX



Globe complete with modern base and E27 lampholder.

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

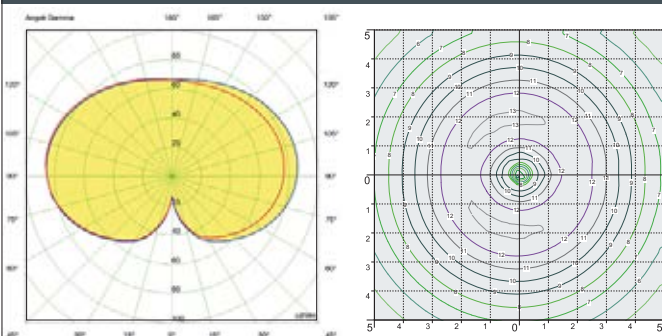

GLOBE 500 E27 - opal
HQI 100W

POST height 4,5mt
10x10mt area: average 9 lux


The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GLOBE 500 MODERN

GRAND SIZE





NEW LOT/GLOBE500
G51.115

Pcs 1
Kg 4,3
mc 0,15

PILAR/GLOBE500
G51.253

Pcs 1
Kg 6
mc 0,17

GLOBE500
G51.B50

Pcs 2
Kg 8
mc 0,29

EKTOR 5000/ GLOBE500	AKILLE 5000/ GLOBE500
G51.377.000	G51.427.000
Pcs 1 Kg 49,5 mc 0,42	
EKTOR 4500/ GLOBE500	AKILLE 4500/ GLOBE500
G51.374.000	G51.424.000
Pcs 1 Kg 44 mc 0,39	
EKTOR 4000/ GLOBE500	AKILLE 4000/ GLOBE500
G51.371.000	G51.421.000
Pcs 1 Kg 38,5 mc 0,37	
EKTOR 3500/ GLOBE500	AKILLE 3500/ GLOBE500
G51.367.000	G51.417.000
Pcs 1 Kg 35,1 mc 0,34	

EKTOR 5000 PILAR/GLOBE500 2L	AKILLE 5000 PILAR/GLOBE500 2L
G51.377.P20	G51.427.P20
Pcs 1 Kg 57,7 mc 0,64	
EKTOR 4500 PILAR/GLOBE500 2L	AKILLE 4500 PILAR/GLOBE500 2L
G51.374.P20	G51.424.P20
Pcs 1 Kg 52,2 mc 0,61	
EKTOR 4000 PILAR/GLOBE500 2L	AKILLE 4000 PILAR/GLOBE500 2L
G51.371.P20	G51.421.P20
Pcs 1 Kg 46,7 mc 0,58	

EKTOR 5000 PILAR/GLOBE500 1L	AKILLE 5000 PILAR/GLOBE500 1L
G51.377.P10	G51.427.P10
Pcs 1 Kg 52 mc 0,45	
EKTOR 4500 PILAR/GLOBE500 1L	AKILLE 4500 PILAR/GLOBE500 1L
G51.374.P10	G51.424.P10
Pcs 1 Kg 46,5 mc 0,42	
EKTOR 4000 PILAR/GLOBE500 1L	AKILLE 4000 PILAR/GLOBE500 1L
G51.371.P10	G51.421.P10
Pcs 1 Kg 41 mc 0,39	

REFERENCES	LAMPS	POST	URBAN MODERN	URBAN CLASSIC	GARDEN	BULKHEAD	BOLLARD	FLOODLIGHT	BRICKLIGHT	IN-GROUND	DOWNLIGHT	UP&DOWN	SOLAR	COMPANY
------------	-------	------	--------------	---------------	--------	----------	---------	------------	------------	-----------	-----------	---------	-------	---------



POST



CLASSIC POSTS

OUR COLLECTION

CLASSIC lighting poles of a single piece without joints, made of shockproof composite material (steel-expanse-resin), UV-rays stabilized, rust and corrosion-free. Moulded colours in paste, no maintenance or painting required. Insulation class II. Available in many design options and different sizes from 0,7mt up to 5mt high. Provided with suitable cage for ground fixation.

Pali in stile CLASSICO fabbricati in un unico pezzo senza giunzioni. Realizzati in materiale composito antiurto (ferro-resina-poliuretano), stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Classe di isolamento II. Disponibili in numerose varianti decorative e in diverse altezze da mt. 0,7 a mt. 5. Provvisti di gabbia per il fissaggio a terra.



METAL POST COVERED BY RESIN

Fumagalli **created** and developed a unique post technology, registered as **FUMATECH**. Fumatech technology grants to our lamps the same strength features of a metal post, combined with all the advantages in terms of rust and corrosion resistance that only a resin material can offer.

L'azienda Fumagalli ha **creato** e sviluppato un'esclusiva tecnologia per la fabbricazione dei pali, registrata come **FUMATECH**. La tecnologia FUMATECH assicura alle nostre lampade le medesime caratteristiche di solidità di un palo in metallo, con tutti i vantaggi in termini di resistenza alla ruggine e alla corrosione che solo la resina può offrire.



more details
at Pag.26



INNER METAL POLE STRUCTURE

Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

Palo strutturale in metallo galvanizzato a caldo sia all'interno che all'esterno tramite immersione in bagno di zinco.

EXPANSE

High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

Il poliuretano ad alta densità, rigido ma molto leggero, garantisce una coesione duratura nel tempo tra il palo interno in metallo e la copertura esterna in resina.


OUTER RESIN COVER

Outer coating of a single piece without joints made of shockproof resin material:

- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire

Rivestimento esterno in un unico pezzo fabbricato in resina antiurto:

- Inattaccabile da ruggine e corrosione
- Colori in pasta stabilizzati ai raggi UV
- Autoestinguente al fuoco




FULLY MODULAR



All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

POST COLOURS

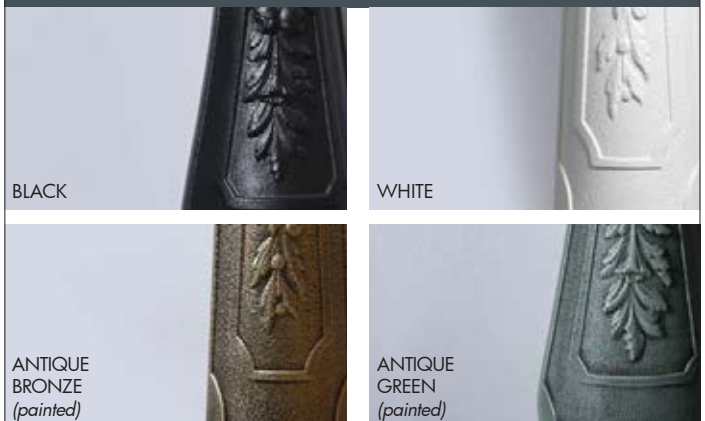

CLASSIC POSTS

INSPECTION DOORS

for KARMEI posts

Inspection door opening:
340 x 80 mm

The inspection door can be personalized with your own logo (available only for KARMEI posts)

La porta di ispezione può essere personalizzata con il vostro LOGO (disponibile solo per i pali KARMEI)

for NEBO TABOR HOREB posts

Inspection door opening:
320 x 60 mm

Duble Insulation
4 x 16 mm²
3 - WAY

CLASS II **IP44**

Fuse holder Ifo electric cc.10

for GIONA posts


Inspection door opening:
185 x 80 mm

VERY EASY MAINTENANCE: IT'S ENOUGH TO CLEAN THE POST WITH SOME OIL TO KEEP IT AS BRIGHT AS NEW.

CLASSIC POST - FOUNDATION SYSTEM



SUGGESTED SIZES FOR CONCRETE FOUNDATION





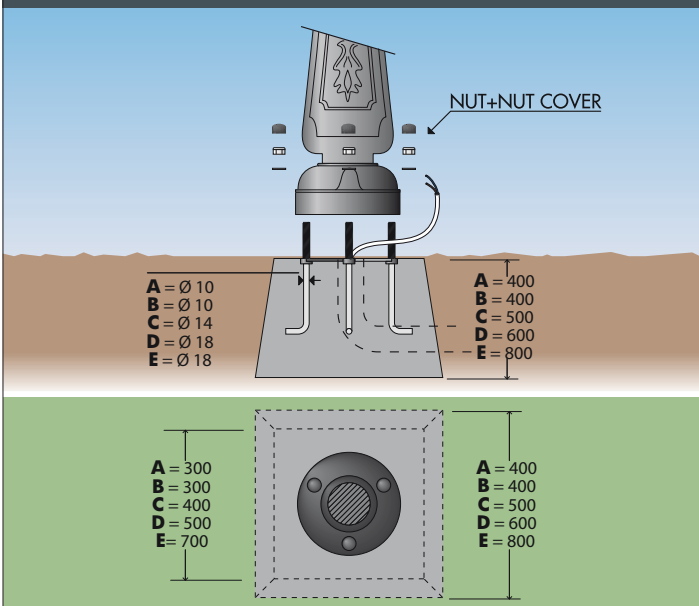


All Fumagalli poles are supplied with suitable cages for fixing into concrete foundations. The size of the cages and the size of the concrete foundation varies according to the high of the post.

Tutti i pali Fumagalli sono forniti complete di gabbie per il fissaggio a terra. Le dimensioni della gabbia e del plinto di cemento variano a secondo dell'altezza del palo.

The fixation system with two triangles allows the anchor bolts to be cemented perpendicularly to the ground. The second triangle has to be removed before installing the pole.

Il sistema di fissaggio con due triangoli assicura che i tiranti vengano affogati nel cemento in maniera perfettamente perpendicolare rispetto al terreno. Il secondo triangolo deve essere rimosso prima di procedere al fissaggio del palo.

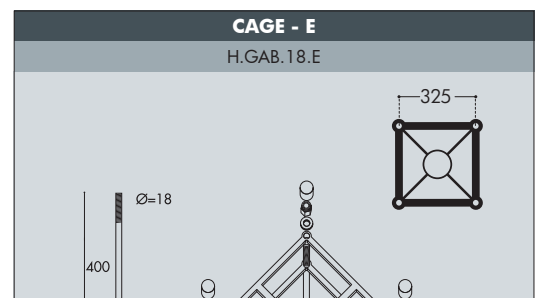

CLASSIC POSTS

CLASSIC POST COLLECTION





Each post is supplied with the suitable cage or screws for fixation.

Colours available for the CLASSIC range are the following:

Moulded colours: **Black - White**

Painted Colours: **Antique Green - Antique Bronze**

WITHOUT DOOR
WITH DOOR
WITH DOOR AND BOX

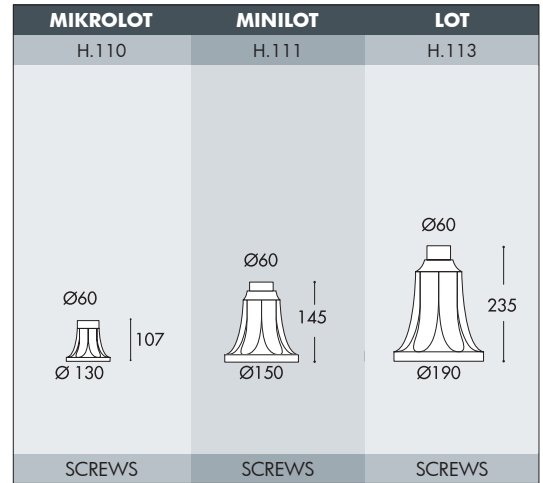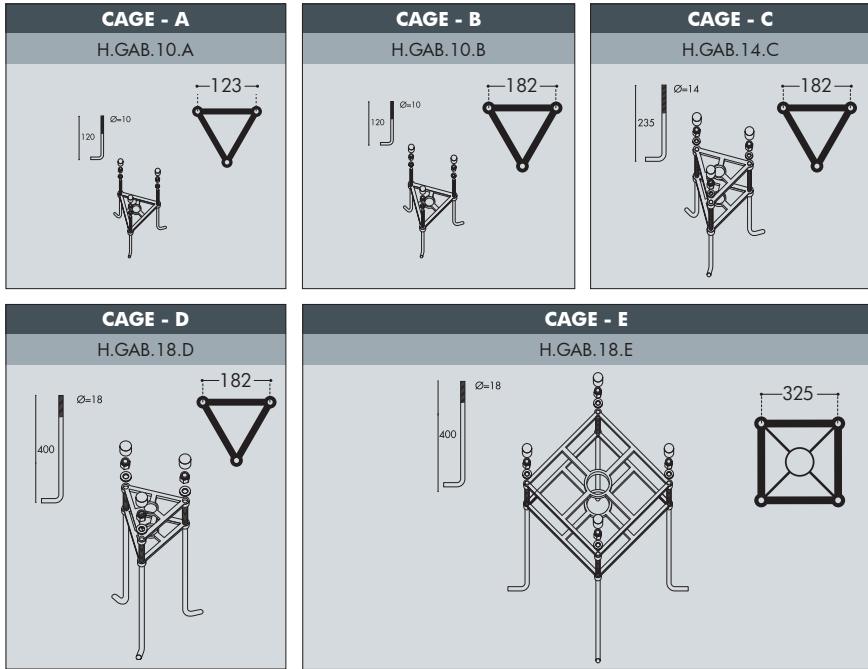


IAFET.R	ERMON.R	MIZAR	ALOE'.R	ARTU'	GIGI	RICU
000.162	000.195	000.151	000.163	000.158	000.156	000.157
DOOR NOT AVAILABLE		DOOR NOT AVAILABLE				
resin	resin	resin	resin			
Pcs 2 Kg 5,3 mc 0,057	Pcs 1 Kg 4,3 mc 0,075	Pcs 5 Kg 3 mc 0,61	Pcs 2 Kg 6 mc 0,086	Pcs 2 Kg 15,5 mc 0,151	Pcs 2 Kg 18,5 mc 0,182	Pcs 2 Kg 20 mc 0,214
CAGE - A	CAGE - C	SCREWS	CAGE - A	CAGE - B	CAGE - B	CAGE - B

NEBO			TABOR			HOREB			KARMEL 3000			KARMEL 3500			KARMEL 4000			GIONA 4000*			GIONA 4500*			GIONA 5000*								
000.201	000.204	000.207	000.201	000.204	000.207	000.201	000.204	000.207	000.231	000.234	000.237	000.231	000.234	000.237	000.231	000.234	000.237	000.221	000.224	000.227	000.221	000.224	000.227	000.221	000.224	000.227	000.221	000.224	000.227	000.221	000.224	000.227
000.202	000.205	000.208	000.202	000.205	000.208	000.202	000.205	000.208	000.232	000.235	000.238	000.232	000.235	000.238	000.232	000.235	000.238	000.222	000.225	000.228	000.222	000.225	000.228	000.222	000.225	000.228	000.222	000.225	000.228	000.222	000.225	000.228
000.203	000.206	000.209	000.203	000.206	000.209	000.203	000.206	000.209	000.233	000.236	000.239	000.233	000.236	000.239	000.233	000.236	000.239	000.223	000.226	000.229	000.223	000.226	000.229	000.223	000.226	000.229	000.223	000.226	000.229	000.223	000.226	000.229
DOOR IS OPTIONAL									DOOR IS OPTIONAL									DOOR IS OPTIONAL														
Pcs 1 Kg 21 mc 0,135	Pcs 1 Kg 25,5 mc 0,164	Pcs 1 Kg 28 mc 0,190	Pcs 1 Kg 25,5 mc 0,167	Pcs 1 Kg 28 mc 0,193	Pcs 1 Kg 30,5 mc 0,220	Pcs 1 Kg 55 mc 0,744	Pcs 1 Kg 58 mc 0,871	Pcs 1 Kg 60 mc 0,968																								
CAGE - C	CAGE - C	CAGE - C	CAGE - C	CAGE - C	CAGE - D	CAGE - E	CAGE - E	CAGE - E																								

*available in black colour only

CLASSIC POSTS

CLASSIC POST TOP SYSTEMS

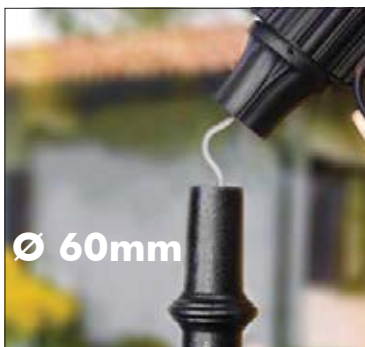

FULLY MODULAR

All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

I terminali di connessione dei pali e delle lanterne FUMAGALLI hanno sempre un diametro di 60 mm; questa caratteristica unica permette svariate combinazioni di lampade complete con i medesimi componenti per una grande flessibilità di magazzino.

BISSO SYSTEM

BISSO SYSTEM 2L 000.000.S20	BISSO SYSTEM 2 + 1 000.000.S21	BISSO SYSTEM 3L 000.000.S30	BISSO SYSTEM 3 + 1 000.000.S31
550	550	470	470

OFIR SYSTEM



























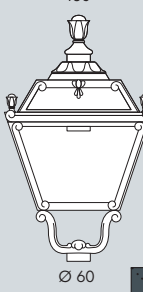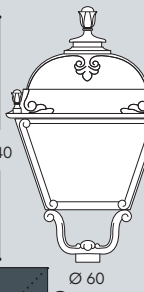






OFIR SYSTEM 2L 000.000.R20	OFIR SYSTEM 2 + 1 000.000.R21	OFIR SYSTEM 3L 000.000.R30	OFIR SYSTEM 3 + 1 000.000.R31
650	650	560	560

ADAM SYSTEM

ADAM SYSTEM 2L 000.000.M20	ADAM SYSTEM 2 + 1 000.000.M21	ADAM SYSTEM 3L 000.000.M30	ADAM SYSTEM 3 + 1 000.000.M31
1050	1050	900	900

ARON SYSTEM

ARON SYSTEM 1L 000.000.N10	ARON SYSTEM 2L 000.000.N20	ARON SYSTEM 4L 000.000.N40
950	1900	1900

	SMALL SIZE		MEDIUM SIZE		LARGE SIZE		GRAND SIZE	
HEXAGONAL LANTERNS	ANNA E22.000	SABA K22.000	RUT E26.000	SALEM K26.000	NOEMI E35.000	SILOE K35.000		
								
								
SQUARE LANTERNS	MARY Q18.000	GOLIA Q23.000	CEFA U23.000	TOBIA Q33.000 Q35.000 *	SIMON U33.000 U35.000 *	ELIA Q43.000 Q45.000 *	PIETRO U43.000 U45.000 *	
								
								
HALF LANTERNS	IESSE M22.000			DARIA M28.000				
								
GLOBES	GLOBE 250 CLASSIC G25.B25	GLOBE 300 CLASSIC G30.B30	GLOBE 400 CLASSIC G40.B40	GLOBE 500 CLASSIC G50.B50				
								
								

MODERN POSTS

OUR COLLECTION

MODERN lighting poles of a single piece without joints, made of shockproof composite material (steel-expanse-resin), UV-rays stabilized, rust and corrosion-free. Insulation class II. Moulded colours in paste, no maintenance or painting required. Insulation class II. Available in many design options and different sizes from 0,7mt up to 6mt high. Provided with suitable cage for ground fixation.

Pali in stile MODERNO fabbricati in un unico pezzo senza giunzioni. Realizzati in materiale composito antiurto (ferro-resina-poliuretano), stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Classe di isolamento II. Disponibili in numerose varianti decorative e in diverse altezze da mt. 0,7 a mt. 6. Provvisti di gabbia per il fissaggio a terra.



MADE IN ITALY

METAL POST COVERED BY RESIN

Fumagalli **created** and developed a unique post technology, registered as **FUMATECH**. Fumatech technology grants to our lamps the same strength features of a metal post, combined with all the advantages in terms of rust and corrosion resistance that only a resin material can offer.

L'azienda Fumagalli ha **creato** e sviluppato un'esclusiva tecnologia per la fabbricazione dei pali, registrata come **FUMATECH**. La tecnologia FUMATECH assicura alle nostre lampade le medesime caratteristiche di solidità di un palo in metallo, con tutti i vantaggi in termini di resistenza alla ruggine e alla corrosione che solo la resina può offrire.



more details
at Pag.26



INNER METAL POLE STRUCTURE

Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

Palo strutturale in metallo galvanizzato a caldo sia all'interno che all'esterno tramite immersione in bagno di zinco.

EXPANSE

High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

Il poliuretano ad alta densità, rigido ma molto leggero, garantisce una coesione duratura nel tempo tra il palo interno in metallo e la copertura esterna in resina.


OUTER RESIN COVER

Outer coating of a single piece without joints made of shockproof resin material:

- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire

Rivestimento esterno in un unico pezzo fabbricato in resina antiurto:

- Inattaccabile da ruggine e corrosione
- Colori in pasta stabilizzati ai raggi UV
- Autoestinguente al fuoco

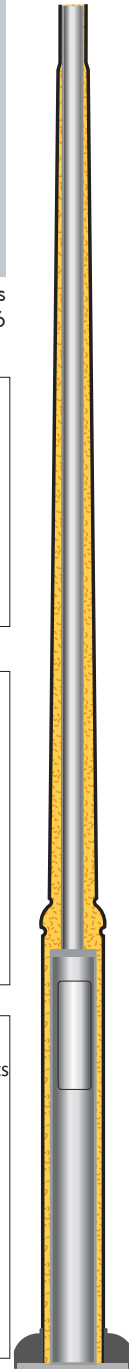

MODULAR SYSTEM



All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.


POST COLOURS




MODERN POSTS

INSPECTION DOORS

for EKTOR and AKILLE posts



Inspection door opening:
340 x 80 mm

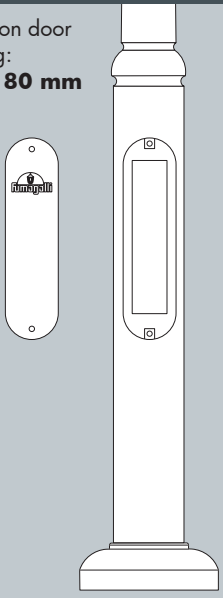

400

510



The inspection door can be personalized with your own logo (available for EKTOR and AKILLE posts)

La porta di ispezione può essere personalizzata con il vostro LOGO (disponibile per i pali EKTOR e AKILLE)

for EKTOR2500 post



Inspection door opening:
340 x 80 mm




400

220

Duble Insulation
4 x 16 mm²
3 - WAY

CLASS II **IP44**

Fuse holder Ifo electric cc.10

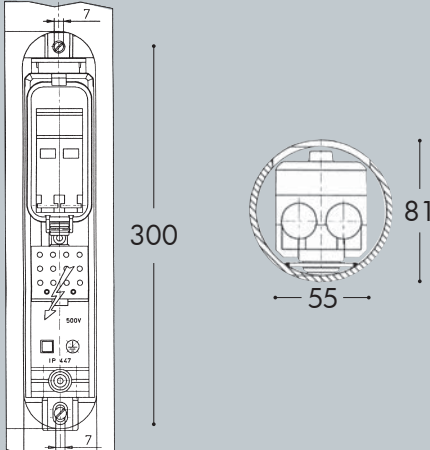

7

300

81

55

500V

IP 44


VERY EASY MAINTENANCE: IT'S ENOUGH TO CLEAN THE POST WITH SOME OIL TO KEEP IT AS BRIGHT AS NEW.



MODERN POST - FOUNDATION SYSTEM



SUGGESTED SIZES FOR CONCRETE FOUNDATIONS




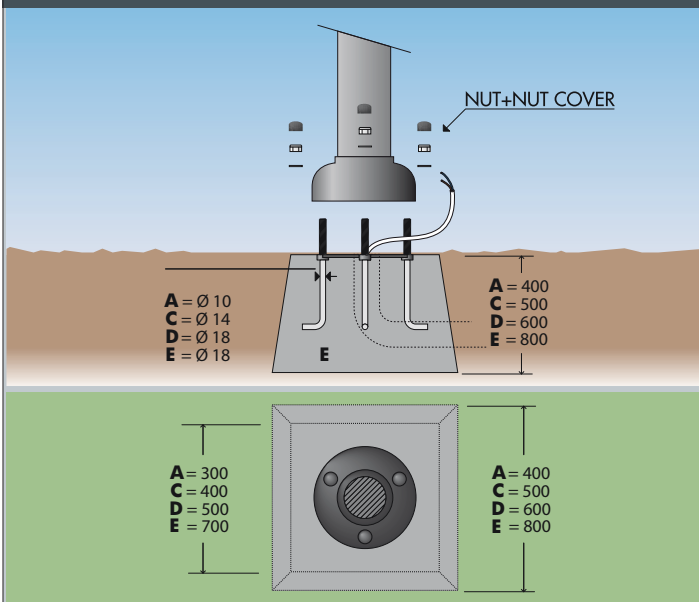


All Fumagalli poles are supplied with suitable cages for fixing into concrete foundations. The size of the cages and the size of the concrete foundation varies according to the high of the post.

Tutti i pali Fumagalli sono forniti complete di gabbie per il fissaggio a terra. Le dimensioni della gabbia e del plinto di cemento variano a secondo dell'altezza del palo.

The fixation system with two triangles allows the anchor bolts to be cemented perpendicularly to the ground. The second triangle has to be removed before installing the pole.

Il sistema di fissaggio con due triangoli assicura che i tiranti vengano affogati nel cemento in maniera perfettamente perpendicolare rispetto al terreno. Il secondo triangolo deve essere rimosso prima di procedere al fissaggio del palo.

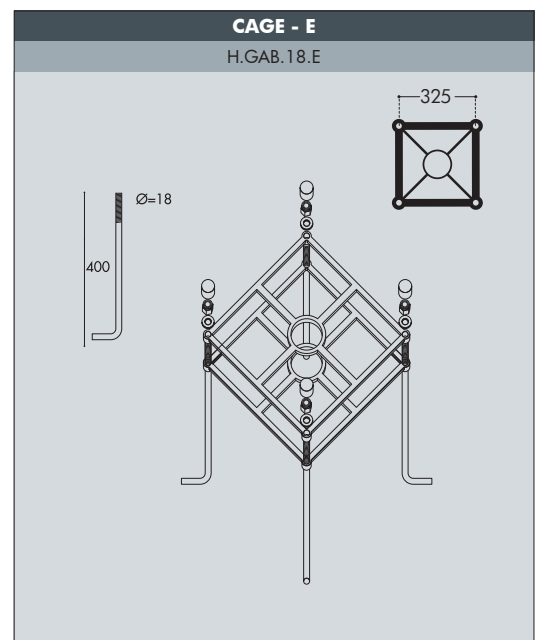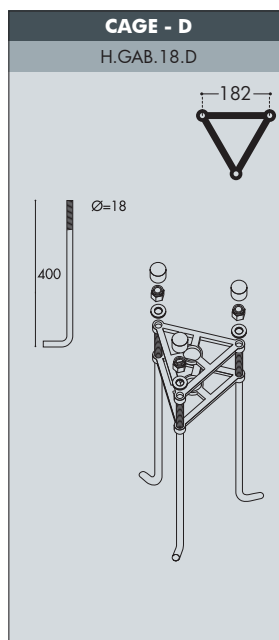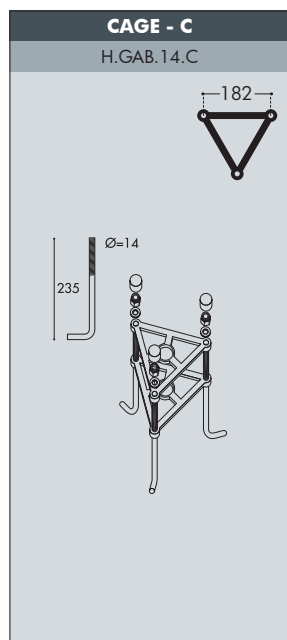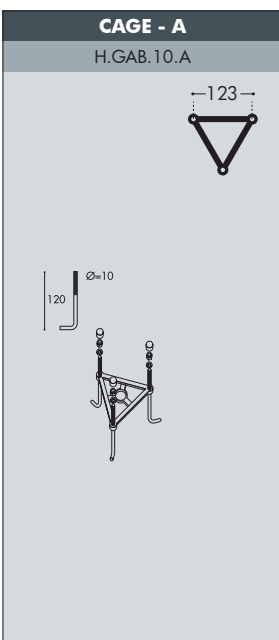

MODERN POSTS

MODERN POST COLLECTION



Each post is supplied with the suitable cage or screws for fixation.

Moulded Colours available for the MODERN poles are the following:

For ARGO, FEBO and ENEA posts: **Black**

For GIAFFA post: **Black - White**

For EKTOR and AKILLE posts: **Black - White - Grey**

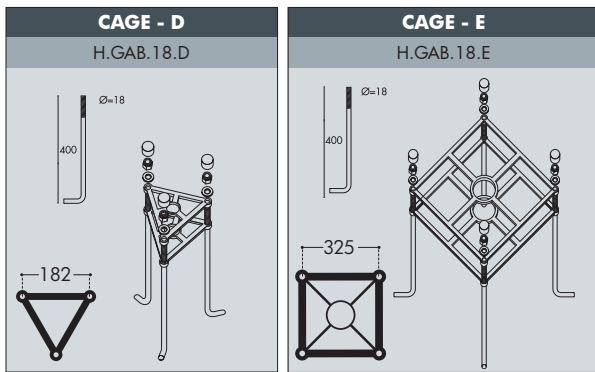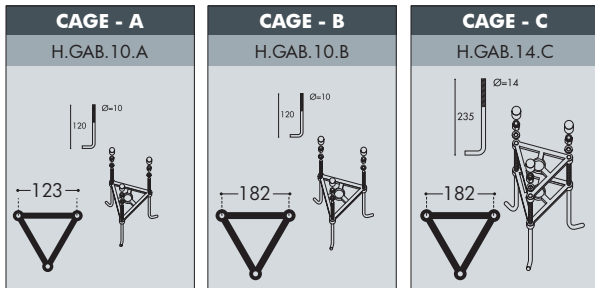

GIAFFA	ARGO 300	ARGO 500	ARGO 800	FEBO1500	ENEA 2000	ENEA 2400
000.242	000.255	000.256	000.257	000.263	000.264	000.265
DOOR NOT AVAILABLE	DOOR NOT AVAILABLE				DOOR NOT AVAILABLE	
resin	resin	resin	resin			
Pcs 5 Kg 3 mc 0,61	Pcs 2 Kg 1,28 mc 0,025	Pcs 2 Kg 1,69 mc 0,035	Pcs 2 Kg 2,26 mc 0,057	Pcs 2 Kg 9,80 mc 0,148	Pcs 1 Kg 8 mc 0,111	Pcs 1 Kg 10 mc 0,132
SCREWS	SCREWS	SCREWS	SCREWS	CAGE - A	CAGE - A	CAGE - A

	AKILLE 3000	AKILLE 3500	AKILLE 4000
WITHOUT DOOR	000.414	000.417	000.421
WITH DOOR	000.415	000.418	000.422
WITH DOOR AND BOX	000.416	000.419	000.423

DOOR IS OPTIONAL

	AKILLE 3000	AKILLE 3500	AKILLE 4000
Pcs 1 Kg 277 mc 0,159	Pcs 1 Kg 31,1 mc 0,185	Pcs 1 Kg 34,5 mc 0,212	
CAGE - C	CAGE - C	CAGE - D	

AKILLE 4500	AKILLE 5000
000.424	000.427
000.425	000.428
000.426	000.429


DOOR IS OPTIONAL

Pcs 1
Kg 40
mc 0,238

Pcs 1
Kg 45,5
mc 0,265



CAGE - D



CAGE - D

EKTOR 2500	EKTOR 3000	EKTOR 3500	EKTOR 4000	EKTOR 4500	EKTOR 5000	EKTOR 6000
000.361	000.364	000.367	000.371	000.374	000.377	000.384
000.362	000.365	000.368	000.372	000.375	000.378	000.385
000.363	000.366	000.369	000.373	000.376	000.379	000.386

DOOR IS OPTIONAL

Pcs 1
Kg 24,3
mc 0,159

Pcs 1
Kg 27,7
mc 0,159

Pcs 1
Kg 31,1
mc 0,185

Pcs 1
Kg 34,5
mc 0,212


Pcs 1
Kg 40
mc 0,238

Pcs 1
Kg 45,5
mc 0,265


Pcs 1
Kg 75
mc 1,21




CAGE - C

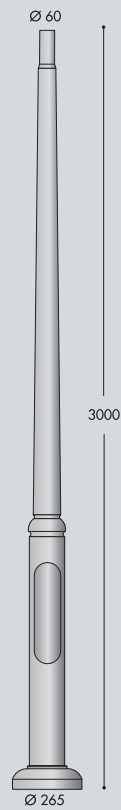


CAGE - C




CAGE - C




CAGE - D

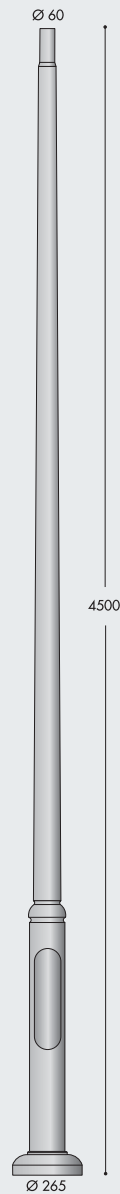

CAGE - D



CAGE - D

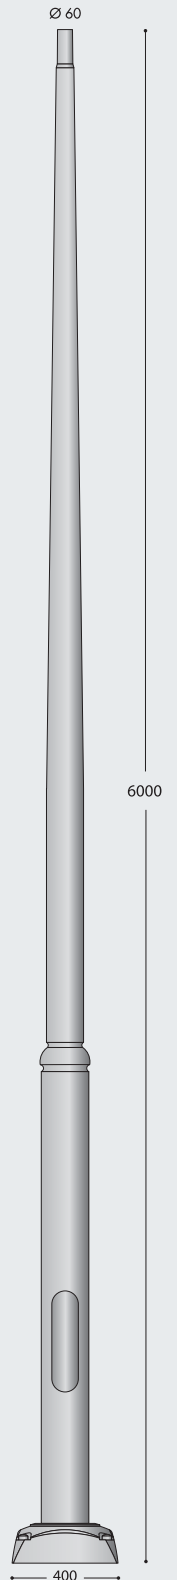

CAGE - E

MODERN POSTS

MODERN POST TOP SYSTEMS



FULLY MODULAR




All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

I terminali di connessione dei pali e delle lanterne FUMAGALLI hanno sempre un diametro di 60 mm; questa caratteristica unica permette svariate combinazioni di lampade complete con i medesimi componenti per una grande flessibilità di magazzino.


GIORGIO

4P2.000.G10
4P1.000.G10




ROSA

4P2.000.G20
4P1.000.G20



MIDIPILEAR SYSTEM 1L


000.000.A10



MIDIPILEAR SYSTEM


MIDIPILEAR SYSTEM 2L

000.000.A20

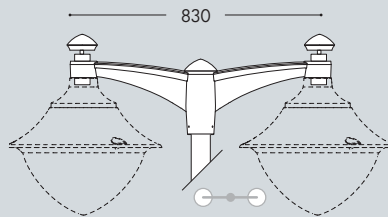

MIDIPILEAR SYSTEM 3L


000.000.A30

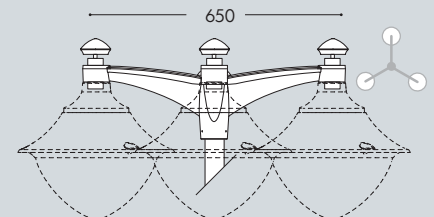

PILAR SYSTEM


PILAR SYSTEM 1L

000.000.P10



PILAR SYSTEM 2L

000.000.P20

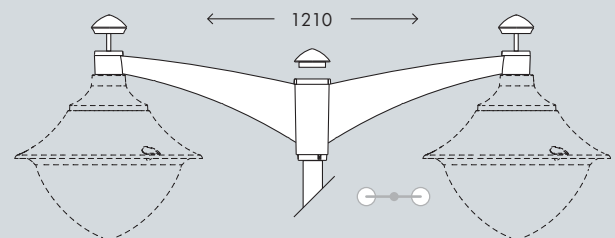

LARGE SIZE		GRAND SIZE	
<p>REMO 400 R50.000</p>	<p>GINO 400 F50.000</p>	<p>REMO 500 R60.000</p>	<p>GINO 500 F60.000</p>
<p>BEPPE 400 P50.000</p>	<p>ECOBEPPE 400 EP5.000</p>	<p>BEPPE 500 P60.000</p>	<p>ECOBEPPE 500 EP6.000</p>
<p>VIVI 400 V50.000</p>	<p>ECOVIVI 400 EV4.000</p>	<p>VIVI 500 V60.000</p>	<p>ECOVIVI 500 EV6.000</p>
<p>GLOBE 250 MODERN G26.B26</p>	<p>GLOBE 300 MODERN G31.B31</p>	<p>GLOBE 400 MODERN G41.B40</p>	<p>GLOBE 500 MODERN G51.B50</p>

COMPANY
SOLAR
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES






LAMPS

FUMAGALLI LED LAMPS

MODULAR SYSTEM



Innovative **TÜV certified LED lamps** with standard E27, GX53 ,R7s, GU10 or G9 lamp holder to get a very efficient LED lighting system. Heatsink and driver are built-in the lamps. LED modules can be easily replaced without the help of a qualified technician. Available in different wattage versions and color temperature. Moreover combining in series Fumagalli GX53 lamps you get a powerful and efficient public lighting system both on classic and modern luminaries.

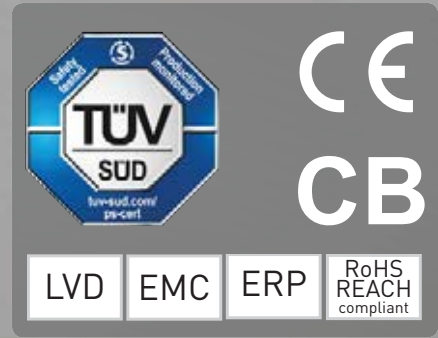

BENEFITS:

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.
- **TÜV CERTIFIED QUALITY:** Production monitored, CE marked, LVD and EMC tested, in compliance with the European Ecodesign Directive (ERP) and with RoHS and REACH directives. CB certified.



Power surges resistant

- **Wide voltage range (100-240V)** to protect the driver both from voltage droop and voltage overshoot, which are quite frequent in case of outdoor installations.
- **Double 400V capacitors** and multiple resistances to withstand power surges.
- **Silicone paste** to avoid – in case of voltage swings- the vibration of the electronic components of the driver and the consequent risk of components unsoldering.



Heat resistant - Working temperature -30°+80°C

- **Gold wire bonding:** Chips connected by pure gold wires, which are able to withstand at the highest and lowest temperatures and at temperature fluctuations between day and night. The gold wire bonding can grant a lumens maintenance factor > 80%.
- **Silicone paste:** Thermoconductive silicone paste with metal powder inside for helping heat dissipation and avoid overheating problems and for protecting the electronic components in case of high and low temperatures.



Humidity resistant - Weatherproof driver for a longer lifetime

- **Silicone paste:** The driver is fully enclosed in a special silicone paste, which ensures the highest driver protection against moisture and humidity up to 90%, both unavoidable in outdoor installations.

LVD
TESTED

LVD Certificate: Fumagalli lamps fulfil the Low Voltage Directive 2014/35/EU, therefore are CE marked and comply with safety requirements like protection against electrical shock, moisture and heat resistance, resistance to flame and ignition.

EMC
TESTED

EMC Certificate: Fumagalli lamps meet the Electromagnetic Compatibility Directive 2014/30/EU and its amendments.



NEW
ERP

New ERP Attestation of conformity: Fumagalli lamps fulfil the NEW European Ecodesign Directive EU 2019/2020, which sets stricter energy efficiency requirements, new verification tolerances and other factors such as bulb lifetime and warm-up time.

CB
IECEE CB
SCHEME

IECEE CB Certificate: Fumagalli lamps meet the International System for Conformity and Certification of Electrotechnical Equipment allowing direct market access in more than 50 countries all over the world.

RoHS
REACH
COMPLIANT

RoHS REACH compliant: Fumagalli lamps fulfil the RoHS (Restriction of Hazardous Substances) directive 2011/65/EU and its amendments and the REACH regulation (EC) No. 1907/2006, regarding the concentration of Very High Concern Substances (SVHC).



Tested according to :
EN 62560:2012/A1: 2015
IEC/TR 62778:2014
EN 62493:2015



SOLAR MODULE

TÜV- CB CERTIFIED LED MODULES



MATERIAL

- PC material suitable for outdoor use
- UV rays stabilized
- Anti shock

SWITCH

- Long press + 5 sec.: for Mode selection
- Short press: for CCT selection

SOLAR PANEL

- Panel 2W/5V
- Monocrystalline
- Antishock material
- UV rays treated.
- Cover made in PET material granting antishock performances for outdoor use

3 WORKING MODE

- ☀️ SUMMER MODE
- ☁️ WINTER MODE
- 📡 SENSOR MODE

REPLACEABLE BATTERY

- Quick and easy battery replacement
- LiFePO4 IFR 26650 3,3Ah-3,2V
- No risk of explosion
- Working temperature -10° to +60°C



PIR SENSOR

- Detection angle 120°
- Fields of detection up to 5m
- Active for 25 sec.




LED

- Power absorption of the led plate 2,5W (at 100% light)
- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.

CCT SET **CCT SETTABLE**


- Press the switch to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.
- 3000K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.




LENS






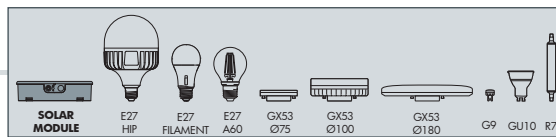

- Frosted color lens reducing dazzle.
- Made of UV rays stabilized resin material to avoid yellowing process.
- Very compact and slim design for a better light distribution and for improving the light efficiency.



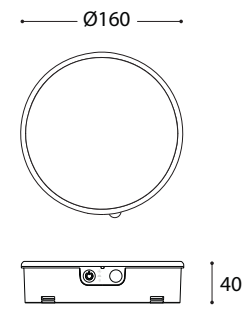

SOLAR MODULE - CCT SETTABLE



SIZE		
SUMMER MODE 	LUMEN	42
	AUTONOMY	25h
WINTER MODE 	LUMEN	20
	AUTONOMY	46h
SENSOR MODE 	LUMEN	280
	ACTIVE TIME	25 sec
	N° Detections	423
SOLAR PANEL 	5V/2W	
	Monocrystalline PET type	
	Antishock material	
CHARGING TIME	6h	
REPLACEABLE BATTERY 	LiFePO4 IFR26650 3,3Ah, 3,2V	
	No Risk of explosion	
	Working temperature -10° to +60°C	
PIR SENSOR 	Longer Lifetime	
	Detection angle 120°	
	Fields of detection up to 5 mt	
	Active for 25 sec.	
LED	3 CIRCUITS	SMD 3528
	COLOR RENDERING INDEX RA	> 80
	SDCM	< 6
	LIFETIME	30.000 h
	KELVIN SETTABLE	3000 K / 4000 K / 6500 K
REF. CODE	H.LED.SOL.CCT	



IECEE CB CERTIFICATE:
SG PSB-LE-02677M1



CE
CB

LVD EMC ERP

E27 HIGH POWER LED

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION

DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528.

LENS

- Opal color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Special lens design for a better light distribution.

THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.



HEATSINK


- Made by white painted aluminum.
- Special design to grant a correct heat dissipation.





CCT SETTABLE





- Switch settable in two different positions, to select the desired Kelvin temperature (3000K, 4000K) and get a customized ambiance.
- 3000k and 4000K led chips on 2 separate circuits to grant SDCM < 6.

3000 K 4000 K 6500 K





E27 HIGH POWER LED - CCT SETTABLE			
	POWER	15 W	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	1545 lm
		4000 K	1690 lm
SIZE & SOCKET	 E27		
<div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> <p>CCT SETTABLE</p> <p>3000 K 4000 K</p> <p>SDCM <6</p> </div> <div style="width: 30%;"> <p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> </div> <div style="width: 30%;"> <p>ENERGY</p> <p>FUMAGALLI SRL H3.LED.HIP.CCT</p> <p>A B C D E F G</p> <p>F</p> <p>15 kWh/1000h</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;">  CE CB LVD EMC ERP </div> <div style="text-align: center;">  IECEE CB CERTIFICATE: SG PSB-LE-03835 </div> </div>	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0,7	
	PSTLM (NO FLICKER)	<1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<6	
	SWITCHING CYCLE	30.000	
	WARM UP TIME	< 0,5"	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	F	
REF. CODE	H3.LED.HIP.CCT		

E27 HIGH POWER LED - CCT SETTABLE			
	POWER	30W	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	3325 lm
		4000 K	3620 lm
SIZE & SOCKET	 E27		
<div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> <p>CCT SETTABLE</p> <p>3000 K 4000 K</p> <p>SDCM <6</p> </div> <div style="width: 30%;"> <p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> </div> <div style="width: 30%;"> <p>ENERGY</p> <p>FUMAGALLI SRL H2.LED.HIP.CCT</p> <p>A B C D E F G</p> <p>E</p> <p>30 kWh/1000h</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;">  CE CB LVD EMC ERP </div> <div style="text-align: center;">  IECEE CB CERTIFICATE: SG PSB-LE-03834 </div> </div>	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0,9	
	PSTLM (NO FLICKER)	<1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<6	
	SWITCHING CYCLE	30.000	
	WARM UP TIME	< 1"	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	E	
REF. CODE	H2.LED.HIP.CCT		

E27 HIGH POWER LED

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION

DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528.



LENS

- Opal color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Special lens design for a better light distribution.



HEATSINK

- Made by white painted aluminum.
- Special design to grant a correct heat dissipation.



DRIVER 100-240V


- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.




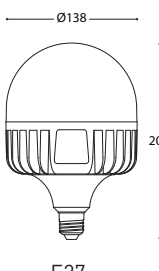



THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.





E27 HIGH POWER LED			
	POWER	50 W	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	5850 lm
		4000 K	6550 lm
SIZE & SOCKET			
 <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p>  <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p>  <p>IECEE CB CERTIFICATE: SG PSB-LE-03791</p>	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0,9	
	PSTLM (NO FLICKER)	<1	
	SVM	0,4	
	CRI	> 80	
	SWITCHING CYCLE	30.000	
	WARM UP TIME	< 1"	
	LIFETIME	25.000 h	
	KELVIN	3000 K	4000 K
EFFICIENCY CLASS	E	E	
REF. CODE	H.LED.HIP.3K	H.LED.HIP.4K	

E27 HIGH POWER LED			
	POWER	60W	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	6800 lm
		4000 K	7600 lm
SIZE & SOCKET			
 <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p>  <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p>  <p>IECEE CB CERTIFICATE: SG PSB-LE-03799</p>	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0,9	
	PSTLM (NO FLICKER)	<1	
	SVM	0,4	
	CRI	> 80	
	SWITCHING CYCLE	30.000	
	WARM UP TIME	< 0,5"	
	LIFETIME	25.000 h	
	KELVIN	3000 K	4000 K
EFFICIENCY CLASS	E	E	
REF. CODE	H4.LED.HIP.3K	H4.LED.HIP.4K	


E27 LED

TÜV- CB CERTIFIED LED MODULES



INDOOR & OUTDOOR USE

-30 +80 °C	90% HUMIDITY
------------	--------------

VOLTAGE SURGE RESISTANT 


LENS

- Opal color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Special lens design for a better light distribution.




GOLD WIRE BONDING

- LED chips connected by gold wires able to withstand at the highest and lowest temperatures and granting a lumens maintenance factor > 80%.




CCT SETTABLE


- Switch settable in three different positions, to select the desired Kelvin temperature (2700K, 4000K, 6500K) and get a customized ambiance.
- 2700K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.

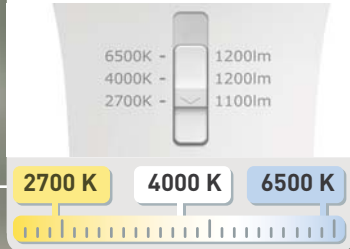
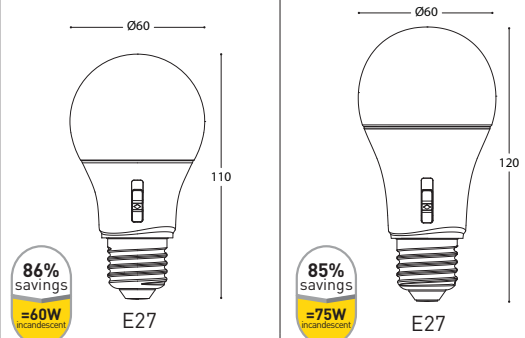
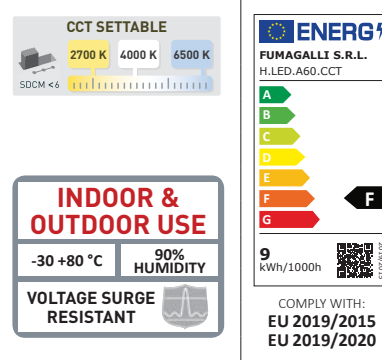



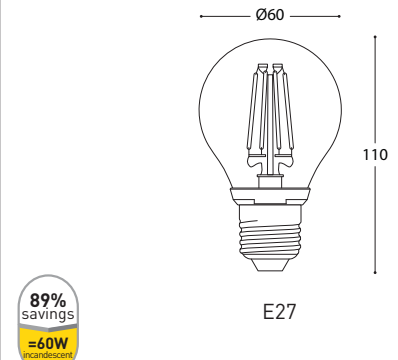
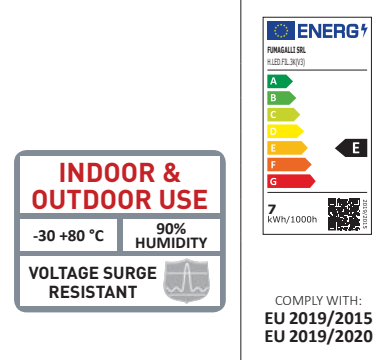
DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.

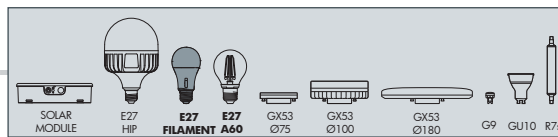

E27 LED A60- CCT SETTABLE				
	POWER	8,5 W	11 W	
	LUMINOUS FLUX (Φ TOTAL)	2700 K	840 lm	1100 lm
		4000 K	920 lm	1200 lm
	6500 K	920 lm	1200 lm	
	SIZE & SOCKET			
	VOLTAGE	100-240 V	100-240 V	
	FREQUENCY	50/60 Hz	50/60 Hz	
	DISPLACEMENT FACTOR	>0,5	>0,7	
	PSTLM (NO FLICKER)	< 1	< 1	
	SVM	0,4	0,4	
	CRI	> 80	> 80	
	SDCM	<6	<6	
	LIFETIME	25.000 h	25.000 h	
	EFFICIENCY CLASS	F	F	
	REF. CODE	H.LED.A60.CCT	H2.LED.A60.CCT	

E27 LED FILAMENT A60		
	POWER	6,5 W
	LUMINOUS FLUX (Φ TOTAL)	2700 K 800 lm
	SIZE & SOCKET	
	VOLTAGE	100-240 V
	FREQUENCY	50/60 Hz
	DISPLACEMENT FACTOR	>0,5
	CRI	> 80
	SWITCHING CYCLE	>100.000
	WARM UP TIME	≤ 0,5"
	LIFETIME	25.000 h
	EFFICIENCY CLASS	E
	REF. CODE	H.LED.FIL.3K

GX53 LED Ø75mm

TÜV- CB CERTIFIED LED MODULES



INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT 

PCB AND CONNECTION RING

- Special connection ring to avoid the PCB deformation under high temperatures and to keep the PCB adhering to the heatsink.



LENS

- Frosted color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Very compact and **slim design** for a better light distribution and for improving the light efficiency.



GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- High quality capacitors and multiple resistances able to withstand power surges.



GX53 LAMPHOLDER


- Quick and easy lamp replacement and version upgrade.
- Made of PBT material resisting up to 180° and 250V.
- VDE certified.



CCT SETTABLE

- Switch settable in three different positions, to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.
- 3000K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.



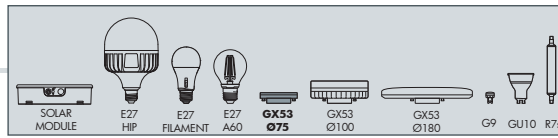

GX53 LED Ø75mm- CCT SETTABLE			
	POWER	3 W	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	405 lm
		4000 K	410 lm
	6500 K	410 lm	
SIZE & SOCKET			
	GX53		
<div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> <p>CCT SETTABLE</p> <p>3000 K 4000 K 6500 K</p> <p>SDCM <6</p> </div> <div style="width: 30%;"> <p>ENERGY</p> <p>FUMAGALLI SRL H.LED.G53.CCT(VQ)</p> <p>A B C D E F G</p> <p>E</p> <p>3 kWh/1000h</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> </div> <div style="width: 30%;"> <p>TUV SUD</p> <p>CE LVD CB EMC ERP</p> <p>IECEE CB SCHEME</p> <p>IECEE CB CERTIFICATE: SG PSB-LE-03887</p> </div> </div> <div style="margin-top: 10px;"> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> </div>	LUMINOUS FLUX (Φ USE 120°)	335 lm	
	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	PSTLM (NO FLICKER)	< 1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<6	
	BEAM ANGLE	112°	
	SWITCHING CYCLE	> 30.000	
	WARM UP TIME	0s	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	E	
REF. CODE	H.LED.G53.CCT		

GX53 LED Ø100mm

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION

DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

LENS

- Frosted color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.

PCB AND CONNECTION RING

- Special connection ring to avoid PCB deformation under high temperatures and to keep the PCB adhering to the heatsink.
- Special thermoconductive paste for gluing firmly the PCB to the heatsink and for helping the heat dissipation.

GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



HEATSINK

- Made by white painted aluminum.
- Special design to grant a correct heat dissipation.

DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.

GX53 LAMP HOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of PBT material resisting up to 180° and 250V.
- VDE certified.




THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.


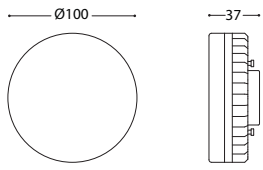
CCT SETTABLE

- Switch settable in three different positions, to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.
- 3000K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.



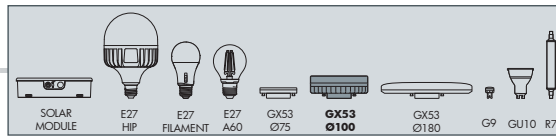

GX53 LED Ø100mm - CCT SETTABLE

	POWER	10W	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	1190 lm
		4000 K	1290 lm
	6500 K	1210 lm	
SIZE & SOCKET	 <p>GX53</p>		
<div style="display: flex; flex-wrap: wrap;"> <div style="width: 50%;"> <p>CCT SETTABLE</p> <p>3000 K 4000 K 6500 K</p> <p>SDCM <6</p> <p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> </div> <div style="width: 50%;"> <p>ENERGY</p> <p>FUMAGALLI SRL H LEDG53.LCCT(V2)</p> <p>A B C D E F G</p> <p>E</p> <p>10 kWh/1000h</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> </div> <div style="width: 50%;"> <p>TUV 900</p> <p>CE LVD CB EMC ERP</p> <p>IECEE</p> <p>IECEE CB CERTIFICATE: SG PSB-LE-03887</p> </div> </div>	LUMINOUS FLUX (Φ USE 120°)	975 lm	
	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0,5	
	PSTLM (NO FLICKER)	< 1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<6	
	BEAM ANGLE	112°	
	SWITCHING CYCLE	> 30.000	
	WARM UP TIME	0s	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	E	
	REF. CODE	H3.LED.G53.CCT	

GX53 LED Ø180mm

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION



DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT




LENS

- Frosted color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Very compact and slim design for a better light distribution and for improving the light efficiency.



GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.

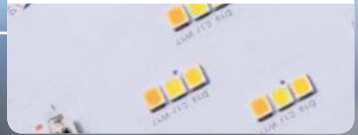



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.





HEAT DISSIPATION

- Special design of the lamp base to grant a proper air circulation and avoid overheating problems.



THERMOCONDUCTIVE SILICONE PASTE (11W-18W)

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.

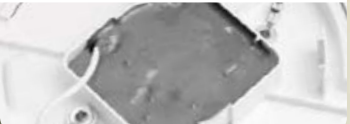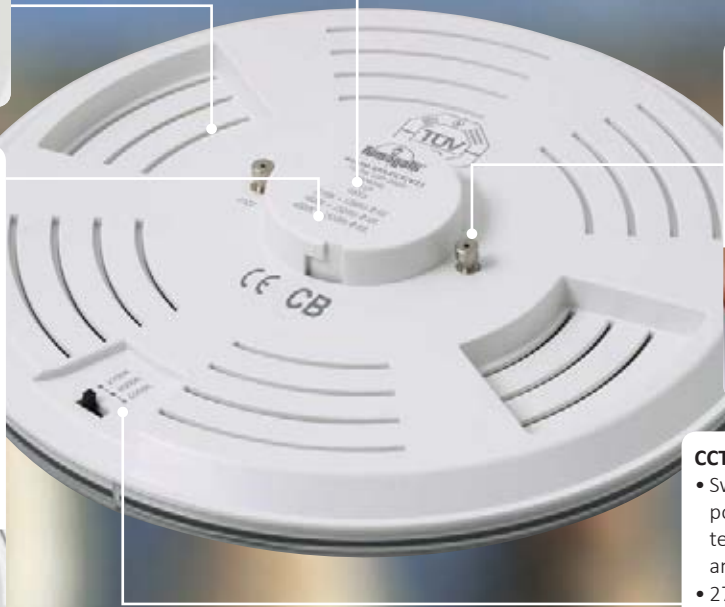
GX53 LAMP HOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of PBT material resisting up to 180° and 250V.
- VDE and NEMKO certified.





CCT SETTABLE


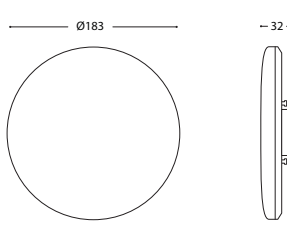



- Switch settable in three different positions, to select the desired Kelvin temperature (2700K, 4000K, 6500K) and get a customized ambiance.
- 2700K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.


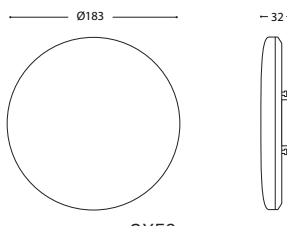





2700 K 4000 K 6500 K



GX53 LED Ø180mm- CCT SETTABLE			
	POWER	7,2 W	
	LUMINOUS FLUX (Φ TOTAL)	2700 K	795 lm
		4000 K	920 lm
6500 K		920 lm	
SIZE & SOCKET	 <p>GX53</p>		
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>CCT SETTABLE</p> <p>SDCM <6</p> <p>2700 K 4000 K 6500 K</p> </div> <div style="width: 45%;">  <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> </div> </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div style="width: 45%;"> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> </div> <div style="width: 45%;">  <p>CE LVD CB EMC ERP</p>  <p>IECEE CB CERTIFICATE: SG PSB-LE-03936</p> </div> </div>	LUMINOUS FLUX (Φ USE 120°)	640 lm	
	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0,5	
	PSTLM (NO FLICKER)	<1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<6	
	BEAM ANGLE (FWHM)	109°	
	SWITCHING CYCLE	> 30.000	
	WARM UP TIME	≤ 0,5"	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	F	
	REF. CODE	H6.LED.G53.CCT	

GX53 LED Ø180mm- CCT SETTABLE				
	POWER	11,3 W	17 W	
	LUMINOUS FLUX (Φ TOTAL)	2700 K	1380 lm	2070 lm
		4000 K	1510 lm	2350 lm
		6500 K	1510 lm	2350 lm
SIZE & SOCKET	 <p>GX53</p>			
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>CCT SETTABLE</p> <p>SDCM <6</p> <p>2700 K 4000 K 6500 K</p> </div> <div style="width: 45%;">  <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> </div> </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div style="width: 45%;"> <p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> </div> <div style="width: 45%;">  <p>CE LVD CB EMC ERP</p>  <p>IECEE CB CERTIFICATE: SG PSB-LE-03936</p> </div> </div>	LUMINOUS FLUX (Φ USE 120°)	1100 lm	1660 lm	
	VOLTAGE	100-240 V	100-240 V	
	FREQUENCY	50/60 Hz	50/60 Hz	
	DISPLACEMENT FACTOR	>0,7	>0,7	
	PSTLM (NO FLICKER)	<1	<1	
	SVM	0,4	0,4	
	CRI	> 80	> 80	
	SDCM	<6	<6	
	BEAM ANGLE (FWHM)	110°	108°	
	SWITCHING CYCLE	> 25.000	> 25.000	
	WARM UP TIME	≤ 0,5"	≤ 0,5"	
	LIFETIME	25.000 h	25.000 h	
	EFFICIENCY CLASS	E	E	
	REF. CODE	H4.LED.G53.CCT	H5.LED.G53.CCT	


G9 LED

TÜV- CB CERTIFIED LED MODULES



INDOOR & OUTDOOR USE

-30 +80 °C	90% HUMIDITY
------------	--------------

VOLTAGE SURGE RESISTANT 

LENS

- Opal lens made of UV stabilized resin material to avoid yellowing process.
- Designed for granting 110° light distribution and for improving light efficiency.


GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.



G9 LAMPHOLDER


- Quick and easy lamp replacement and version upgrade.
- Made of steatite material to resist up to 250°.
- ENEC certified.



HEATSINK

- Made by thermo-conductive ceramic material.
- Special design to grant a correct heat dissipation





G9 LED		
	POWER	1,7 W
	LUMINOUS FLUX (Φ TOTAL)	3000 K 150 lm
		4000 K 150 lm
SIZE & SOCKET		
<div style="display: flex; justify-content: space-between;"> <div style="border: 1px solid black; padding: 5px; width: 45%;"> <p style="text-align: center; font-weight: bold; color: red;">INDOOR & OUTDOOR USE</p> <p style="text-align: center;">-30 +80 °C 90% HUMIDITY</p> <p style="text-align: center; font-weight: bold;">VOLTAGE SURGE RESISTANT</p> </div> <div style="width: 45%;"> <p style="font-size: small;">COMPLY WITH: EU 2019/2015 EU 2019/2020</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> </div> <div style="display: flex; justify-content: center; margin-top: 10px;"> </div>	VOLTAGE	100-240 V
	FREQUENCY	50/60 Hz
	PSTLM (NO FLICKER)	<1
	SVM	0,9
	CRI	> 80
	SDCM	<6
	SWITCHING CYCLE	>40.000
	WARM UP TIME	≤ 0,5"
	LIFETIME	15.000 h
	KELVIN	3000 K 4000 K
EFFICIENCY CLASS	F F	
REF. CODE	H.LED.G09.3K H.LED.G09.4K	

GU10 LED

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION

DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

CCT SETTABLE

- Switch settable in two different positions, to select the desired Kelvin temperature (2700K, 4000K) and get a customized ambiance.
- 2700k and 4000K led chips on 2 separate circuits to grant SDCM < 6.

2700 K 4000 K

LENS

- Frosted lens with prismatic shape reducing dazzle.
- Made of UV stabilized PMMA to avoid yellowing process.

GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



HEATSINK

- Made by aluminum and designed to grant a correct heat dissipation.

DRIVER 100-240V


- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.


GU10 LAMPHOLDER


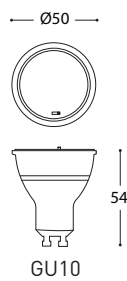
- Quick and easy lamp replacement and version upgrade.
- Made of ceramic material to resist up to 250°.
- VDE certified.


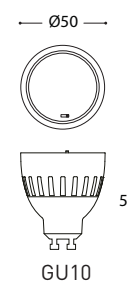
THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.



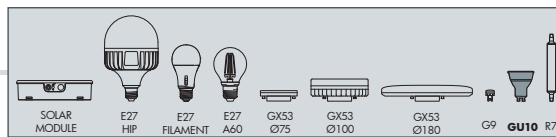

GU10 LED - CCT SETTABLE			
	POWER	3,5 W	
	LUMINOUS FLUX (Φ TOTAL)	2700 K	329 lm
		4000 K	366 lm
SIZE & SOCKET			
<p>CCT SETTABLE</p> <p>2700 K 4000 K</p> <p>SDCM <3</p> <p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> <p>ENERG+ FUMAGALLI S.R.L. H.LED.GU10.CCT</p> <p>A B C D E F G</p> <p>4 kWh/1000h</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> <p>TUV 500</p> <p>CE LVD CB EMC ERP</p> <p>IECEE CB SCHEME</p> <p>IECEE CB CERTIFICATE: SG PSB-LE-02300A1</p>	LUMINOUS FLUX (Φ USE 90°)	260 lm	
	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	PSTLM (NO FLICKER)	<1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<3	
	BEAM ANGLE	43°	
	SWITCHING CYCLE	> 25.000	
	WARM UP TIME	≤ 0,5"	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	F	
REF. CODE	H.LED.GU10.CCT		

GU10 LED - CCT SETTABLE			
	POWER	6 W	
	LUMINOUS FLUX (Φ TOTAL)	2700 K	562 lm
		4000 K	615 lm
SIZE & SOCKET			
<p>CCT SETTABLE</p> <p>2700 K 4000 K</p> <p>SDCM <3</p> <p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> <p>ENERG+ FUMAGALLI S.R.L. H2.LED.GU10.CCT</p> <p>A B C D E F G</p> <p>6 kWh/1000h</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p> <p>TUV 500</p> <p>CE LVD CB EMC ERP</p> <p>IECEE CB SCHEME</p> <p>IECEE CB CERTIFICATE: SG PSB-LE-02300A1</p> <p>88% savings =50W halogen</p>	LUMINOUS FLUX (Φ USE 90°)	440 lm	
	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0,5	
	PSTLM (NO FLICKER)	<1	
	SVM	0,9	
	CRI	> 80	
	SDCM	<3	
	BEAM ANGLE	45°	
	SWITCHING CYCLE	> 25.000	
	WARM UP TIME	≤ 0,5"	
	LIFETIME	25.000 h	
EFFICIENCY CLASS	F		
REF. CODE	H2.LED.GU10.CCT		

R7s LED

TÜV CERTIFIED LED MODULES



INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

CCT SETTABLE

- Switch settable in three different positions, to select the desired Kelvin temperature (2700K, 4000K, 6500K) and get a customized ambiance.
- 2700K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.



LENS

- Opal lens made of UV stabilized resin material to avoid yellowing process.
- Designed for granting 360° light distribution and for improving light efficiency.

HEATSINK

- Made by an aluminum tube on which the PCB is glued to.
- Special design to grant a correct heat dissipation



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- High quality capacitors and multiple resistances able to withstand power surges.



GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3014 LED.



THERMOCONDUCTIVE SILICONE PASTE (7,5W-10,5W)


- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime.
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.



R7s LAMPHOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of steatite material to resist up to 250°.
- VDE certified.



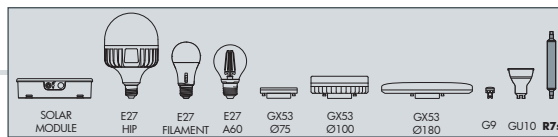

R7s LED 78mm- CCT SETTABLE			
SIZE & SOCKET	R7s 	POWER	3,5W
 <p>2700 K 4000 K 6500 K</p> <p>SDCM <6</p>		LUMINOUS FLUX (Φ TOTAL)	2700 K 325 lm
		4000 K 365 lm	
		6500 K 365 lm	
 <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> <p>CE LVD</p> <p>EMC</p> <p>TUV SUD ERP</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p>	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0	
	PSTLM (NO FLICKER)	<1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<6	
	SWITCHING CYCLE	45.000	
	WARM UP TIME	≤ 0,5"	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	F	
REF. CODE	H7.LED.R7S.CCT		

R7s LED 118mm- CCT SETTABLE			
SIZE & SOCKET	R7s 	POWER	7,5 W
 <p>2700 K 4000 K 6500 K</p> <p>SDCM <6</p>		LUMINOUS FLUX (Φ TOTAL)	2700 K 680 lm
		4000 K 775 lm	
		6500 K 790 lm	
 <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> <p>CE LVD</p> <p>EMC</p> <p>TUV SUD ERP</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p>	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0,5	
	PSTLM (NO FLICKER)	<1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<6	
	SWITCHING CYCLE	45.000	
	WARM UP TIME	≤ 0,5"	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	F	
REF. CODE	H8.LED.R7S.CCT		

R7s LED 189mm- CCT SETTABLE			
SIZE & SOCKET	R7s 	POWER	10,5 W
 <p>2700 K 4000 K 6500 K</p> <p>SDCM <6</p>		LUMINOUS FLUX (Φ TOTAL)	2700 K 1000 lm
		4000 K 1130 lm	
		6500 K 1060 lm	
 <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> <p>CE LVD</p> <p>EMC</p> <p>TUV SUD ERP</p> <p>COMPLY WITH: EU 2019/2015 EU 2019/2020</p>	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	DISPLACEMENT FACTOR	>0,7	
	PSTLM (NO FLICKER)	<1	
	SVM	0,4	
	CRI	> 80	
	SDCM	<6	
	SWITCHING CYCLE	45.000	
	WARM UP TIME	≤ 0,5"	
	LIFETIME	25.000 h	
	EFFICIENCY CLASS	F	
REF. CODE	H9.LED.R7S.CCT		



REFERENCES

LAMPS

POST

URBAN MODERN

URBAN CLASSIC

GARDEN

BULKHEAD

BOLLARD

FLOODLIGHT

BRICKLIGHT

IN-GROUND

DOWNLIGHT

UP&DOWN

SOLAR

COMPANY

FUMAGALLI IN THE WORLD

REFERENCES

LAMPS

POST

URBAN MODERN

URBAN CLASSIC

GARDEN

BULKHEAD

BOLLARD

FLOODLIGHT

BRICKLIGHT


IN-GROUND

DOWNLIGHT

UP&DOWN

SOLAR

COMPANY

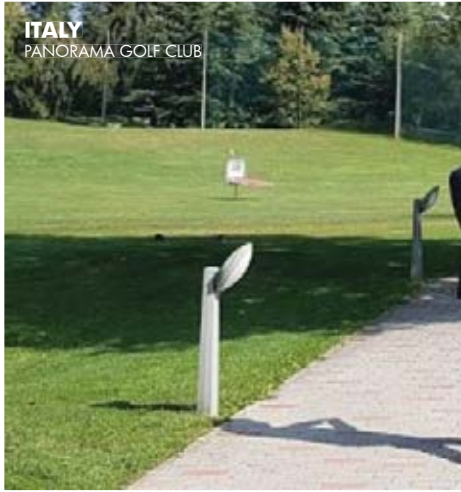

ITALY
PANORAMA GOLF CLUB

ITALY

ITALY



ALBANIA


ALBANIA TIRANA - TE STELA HOTEL

ITALY

PORTUGAL

ALBANIA

ALBANIA

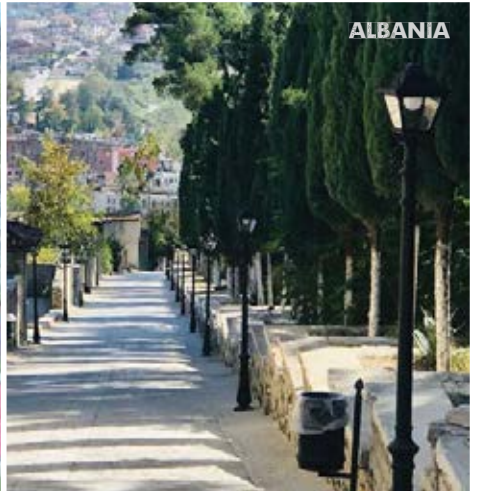


PORTUGAL OESTE - PRAIA DEL REY GOLF CLUB

PORTUGAL AZORES

MADE IN ITALY



KOSOVO

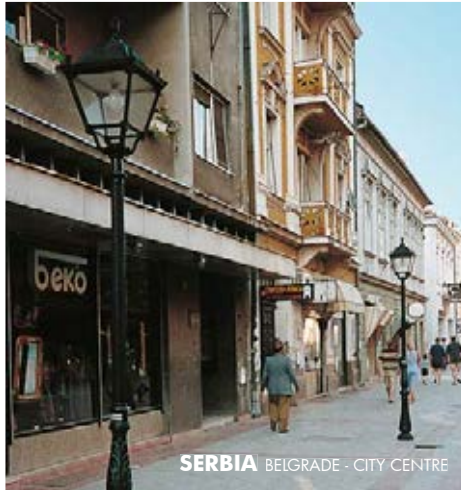


SERBIA BELGRADE - CITY CENTRE



GREAT BRITAIN



GREAT BRITAIN
CHESHIRE

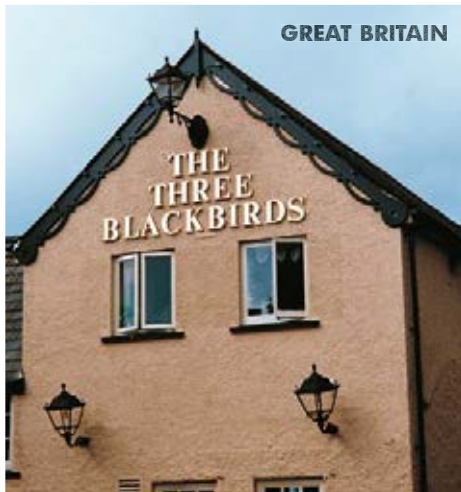

GREAT BRITAIN



GREAT BRITAIN



GREAT BRITAIN
NORTH EAST ENGLAND



GREAT BRITAIN
CHESHIRE



GREAT BRITAIN
WATCHET HARBOUR




GREAT BRITAIN CARAVAN PARK - SOUTH WEST ENGLAND



GREAT BRITAIN
CHESHIRE



GREAT BRITAIN CORNWALL

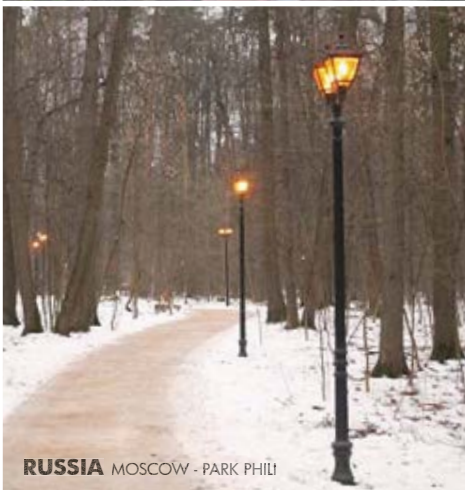


MADE IN ITALY




ROMANIA



ROMANIA TARGU CETATE NEAMT

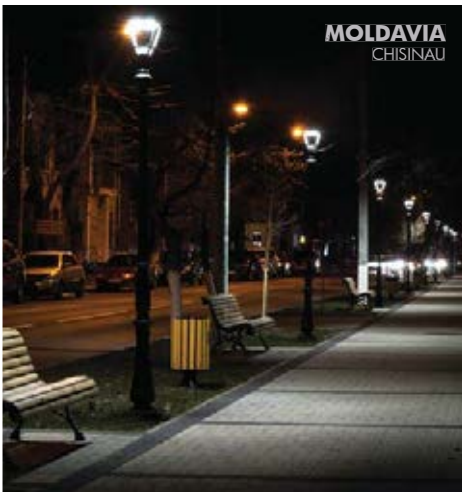

MOLDAVIA
CHISINAU

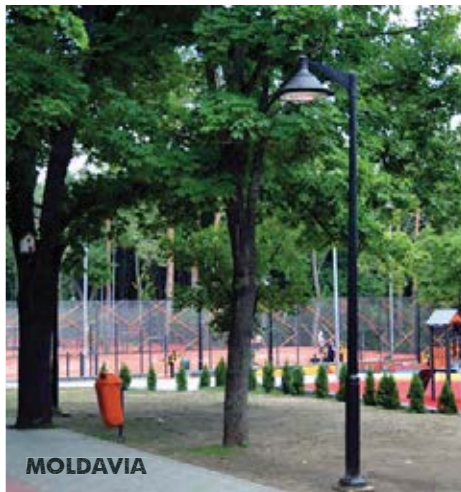

MOLDAVIA




GREECE PAROS



GREECE
CORFU ISLAND



GREECE
SANTORINI ISLAND

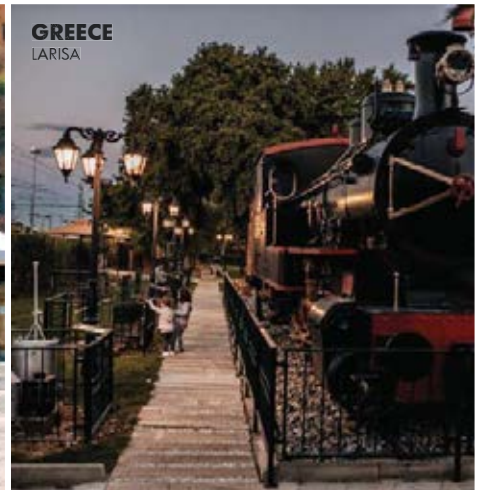

GREECE
LARISA



GREECE
MUNICIPALITY OF LESVOS



GREECE
CORFU ISLAND



GREECE ZANTE



GREECE PAROS




GREECE
CORFU ISLAND



GREECE



GREECE

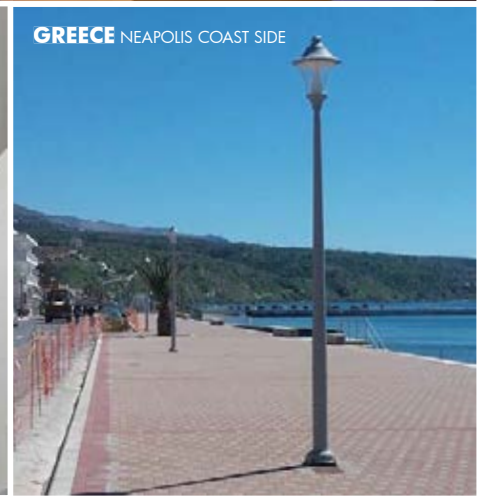


GREECE NEAPOLIS COAST SIDE



CYPRUS
ISKELE MUNICIPALITY - MARINE PARK



CYPRUS
FOLEYS SCHOOL - LIMASSOL

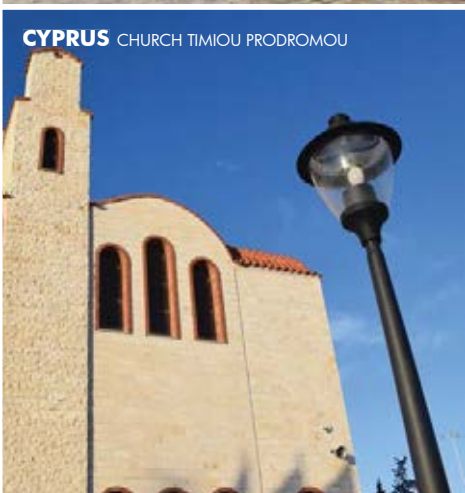

CYPRUS CHURCH TIMIOU PRODROMOU



CYPRUS PRINCESS BEACH HOTEL LARNACA










TUNISIA TUNISI - SHERATON HOTEL



TUNISIA




TUNISIA

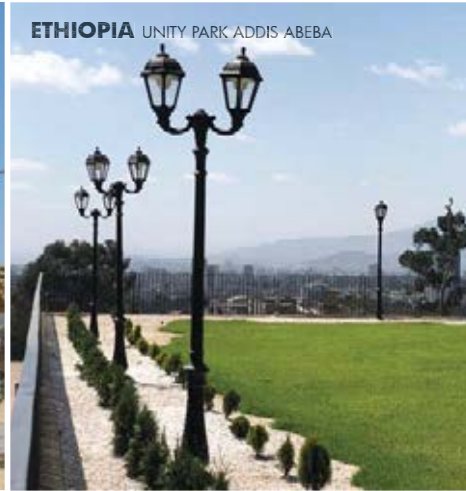


ETHIOPIA UNITY PARK ADDIS ABEBA



ETHIOPIA UNITY PARK ADDIS ABEBA

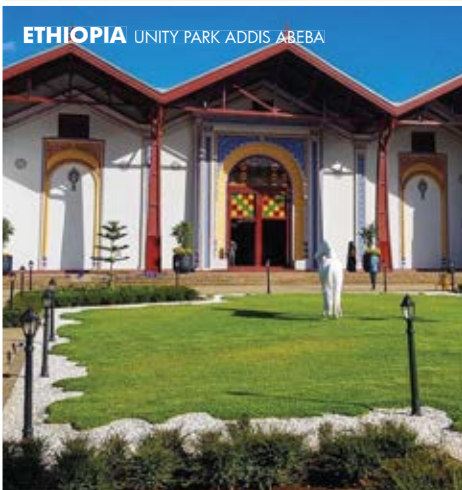

ETHIOPIA UNITY PARK ADDIS ABEBA

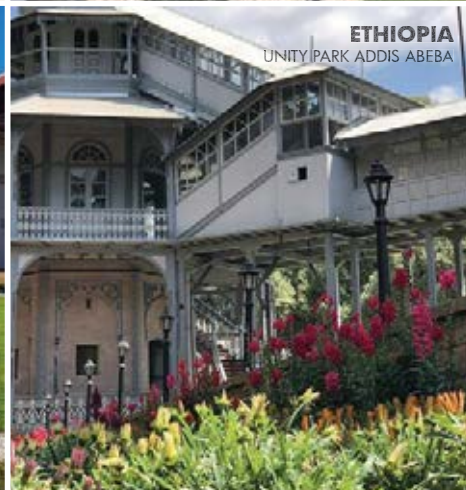

ETHIOPIA UNITY PARK ADDIS ABEBA




PALESTINE



PALESTINE



PALESTINE

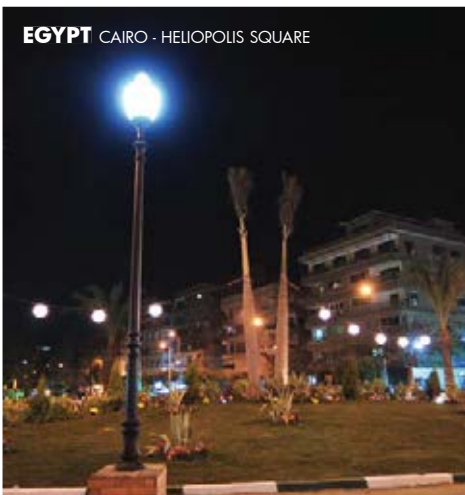




SAUDI ARABIA



SAUDI ARABIA
KING ABDULAH UNIVERSITY

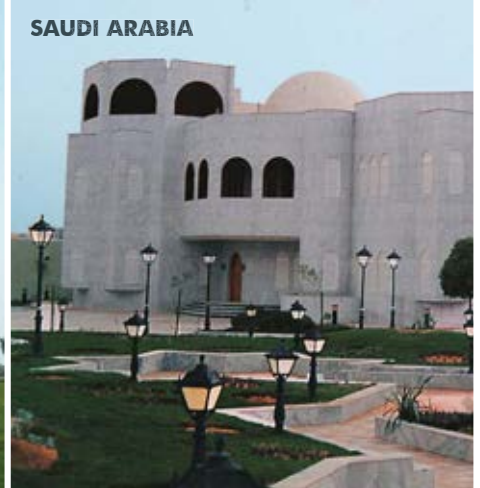

SAUDI ARABIA



SAUDI ARABIA



SAUDI ARABIA



SAUDI ARABIA




SAUDI ARABIA
TABOOK UNIVERSITY



SAUDI ARABIA



SAUDI ARABIA

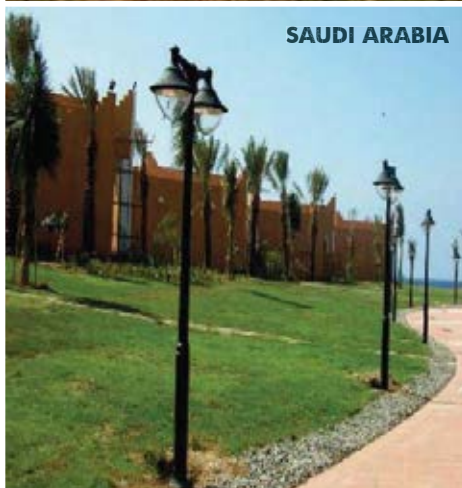

SAUDI ARABIA



SAUDI ARABIA



QATAR DOHA - CORNICE



QATAR



QATAR DOHA - AL KHULAIFAT PARK



QATAR



KUWAIT



KUWAIT
MINISTRY OF INTERIOR

BAHRAIN



U.A.E. DUBAI DOWNTOWN - BURJ KHALIFA



U.A.E. DUBAI - JUMEIRAH BEACH HOTEL




U.A.E. DUBAI - BURJ AL ARAB



U.A.E.



U.A.E. DUBAI - THE PALM

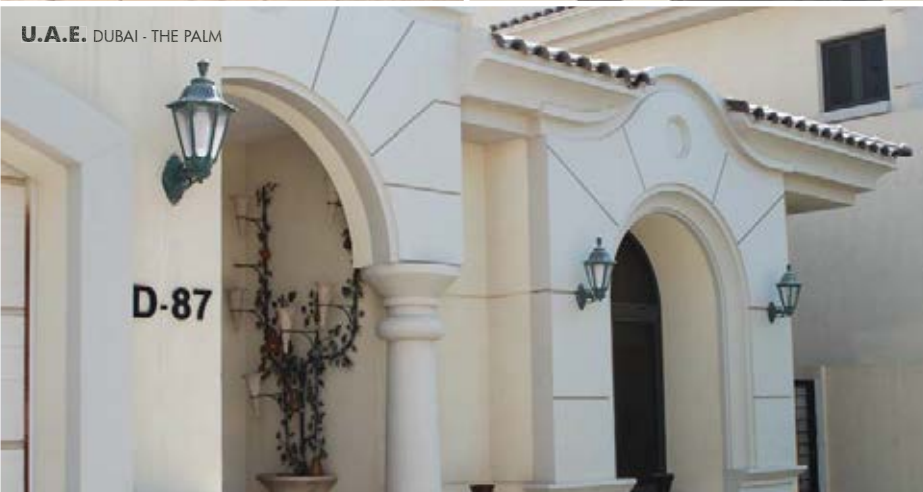

U.A.E. DUBAI - ACADEMIC CITY



U.A.E. DUBAI - NAKHEEL VILLAS



U.A.E. DUBAI - SHOROQ COMMUNITY CENTRE



MADE IN ITALY




OMAN MUSCAT - MINISTRY OF JUSTICE



OMAN



OMAN MUSCAT - MINISTRY OF JUSTICE

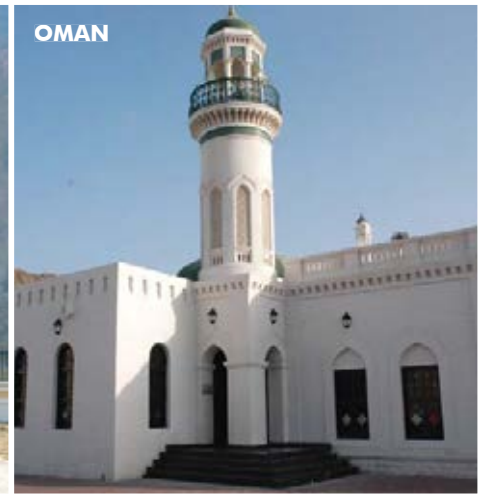

OMAN



OMAN MUSCAT - SULTAN'S PALACES



OMAN WADI DAYQAT




OMAN



OMAN MUSCAT - AL BUSTAN PALACE



OMAN

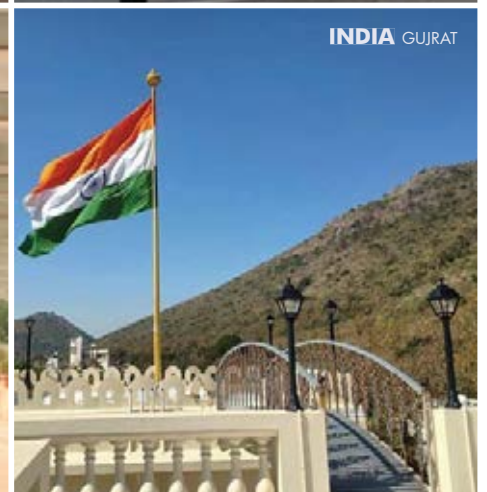



MALAYSIA



MALAYSIA



MALAYSIA




THAILAND




THAILAND



TAIWAN KAOHSIUNG · ELEMENTARY SCHOOL

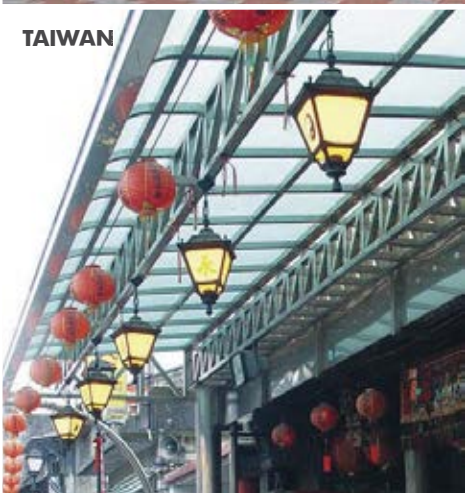

TAIWAN

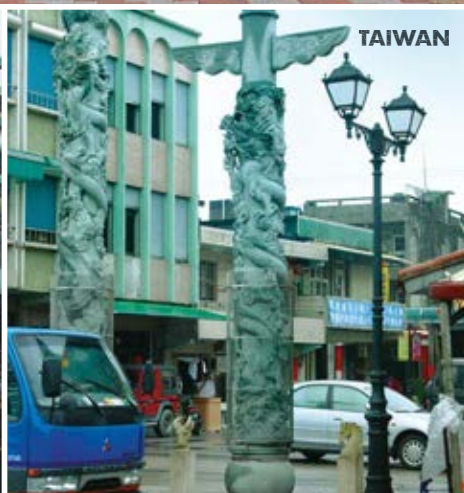

TAIWAN



TAIWAN



SINGAPORE



PHILIPPINES



PHILIPPINES PAMPANGGA - PROVINCIAL CAPITOL



PHILIPPINES CAVITE - PROVINCIAL CAPITOL




PHILIPPINES MANILA - INTRAMUROS



PHILIPPINES CELADON - SAN LAZARO



LAPU-LAPU PLAZA PHILIPPINES

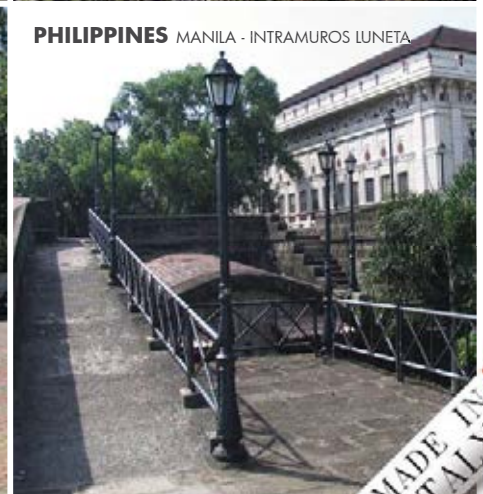

PHILIPPINES MANILA - INTRAMUROS LUNETA



SOUTH KOREA



SOUTH KOREA




SOUTH KOREA



SOUTH KOREA


NEPAL LUMBINI - THE BIRTHPLACE OF THE LORD BUDDHA

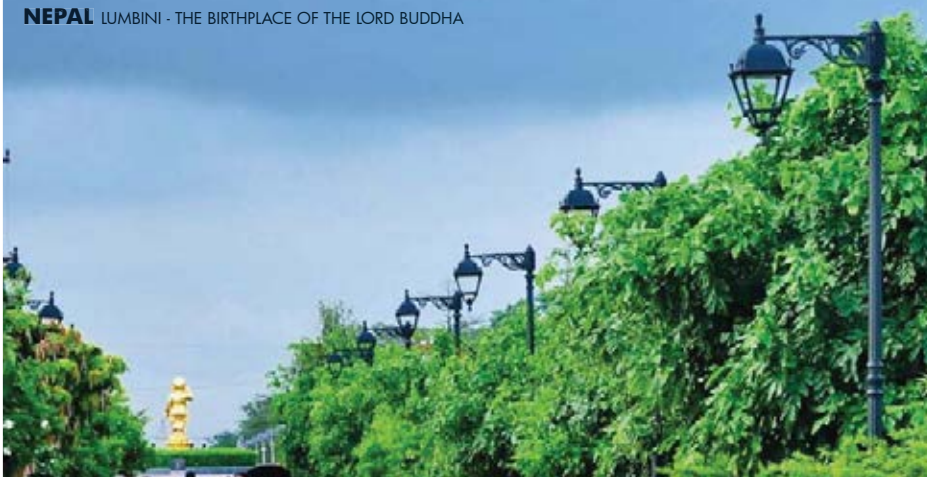

SOUTH KOREA







NEPAL LUMBINI

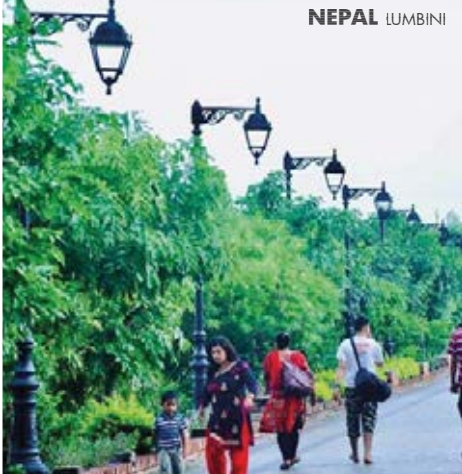

NEPAL PRESIDENT HOUSE



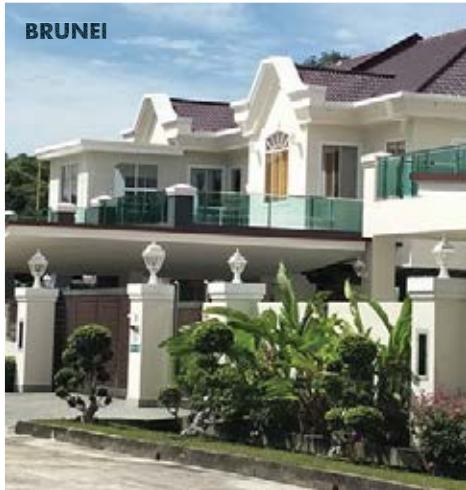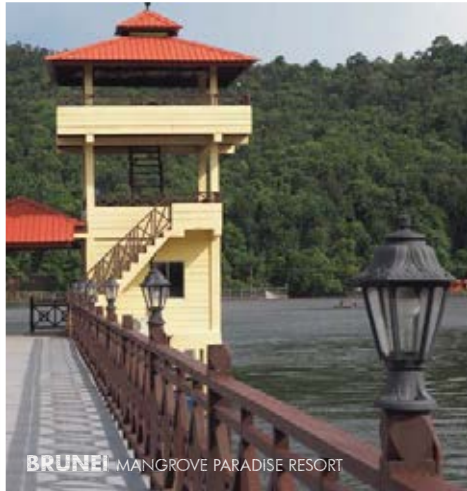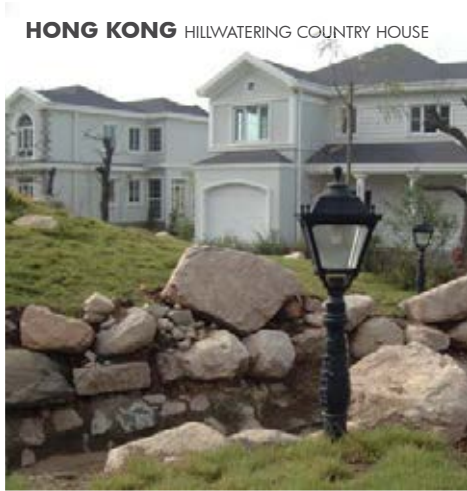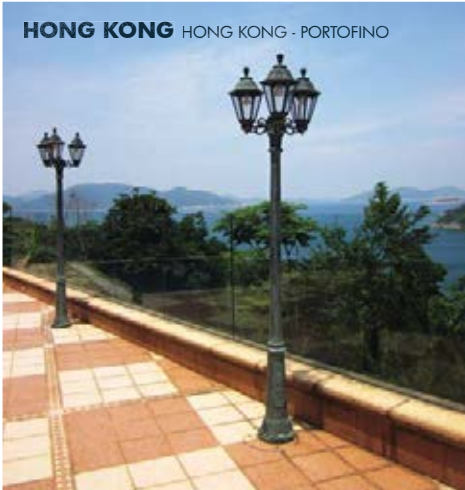



PANAMA LA CALZADA DE AMADOR



COSTA RICA




COSTA RICA



MEXICO




MEXICO

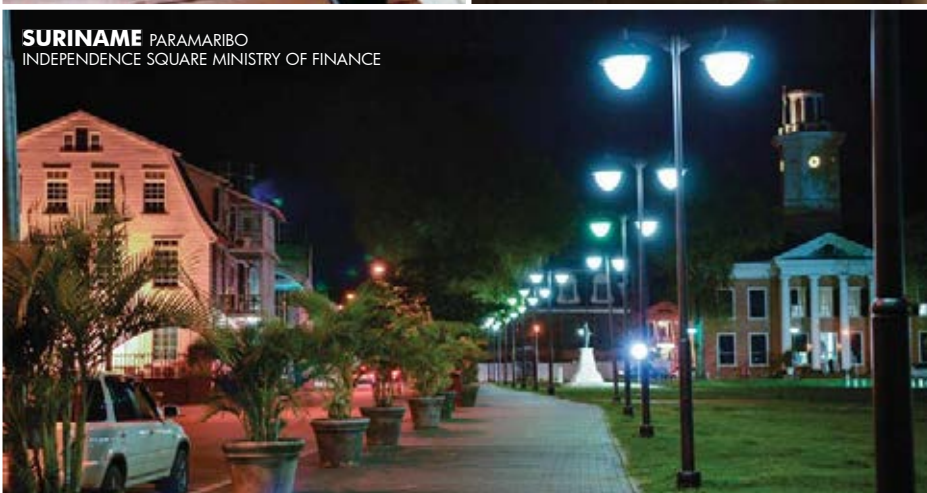

SURINAME PARAMARIBO
INDEPENDENCE SQUARE MINISTRY OF FINANCE



SURINAME

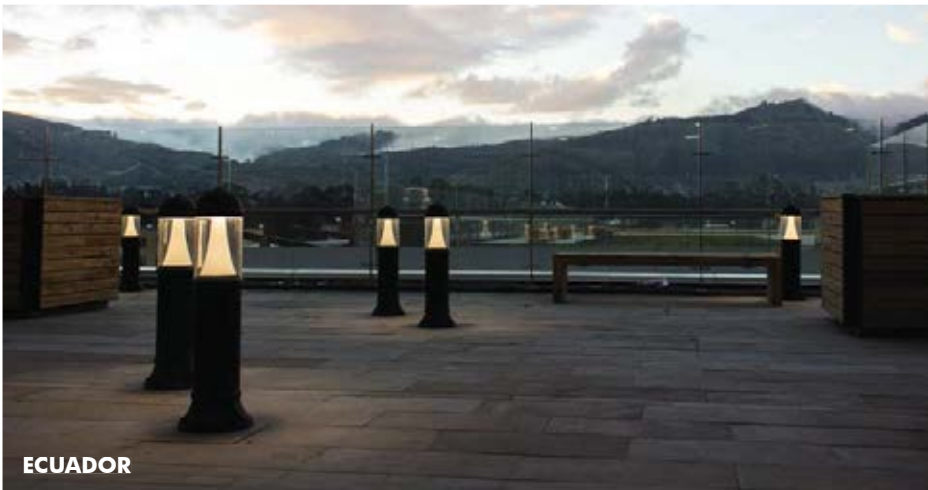



Fumagalli S.r.l.
Via Ca' Bassa, 29
21100 Varese - ITALY
Tel. +39.0332.336353
Fax. +39.0332.336358
E-mail italian.lux@fumagalli.it



www.fumagalli.it