

[www.projectcollection.co.uk](http://www.projectcollection.co.uk)



21 / 22

# project

## collection

---

recessed / recessed plaster / track & spot / led strip /  
ceiling / wall / wall plaster / wall shades / wall lights /  
reading lights / table & floor / shades / outdoor /



# project

collection

.....

**t**he 2021 Project Collection is developed with you the 'specifier' in mind. Providing a single solution that will enable you to effectively specify lighting for your project requirements and the task at hand.

# contents

## recessed

11



zeus LED 🔥💧

12



zeus GU10 🔥💧

13



hera

14



slim trim adjustable FR 🔥

15



slim trim adjustable

16



slim trim IP65 FR 🔥💧

17



slim trim IP65 💧

18-19



glacier 💧 / wall washer

20-21



grid WW / WB / SB / BB

22




grid FR 🔥

23-25



grid FR 🔥 / slim trimless 💧

26-29

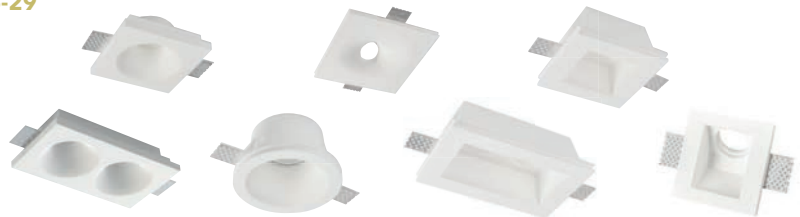

plaster downlights

30-37



recessed wall lights

38-39



marker lights 💧

## track & spot

40-49



track, track heads and accessories

50-53



moon

54-55



selene

56-57



apollo

58-59



jupiter


## led strip

60-65



led strip / IP65

66-69

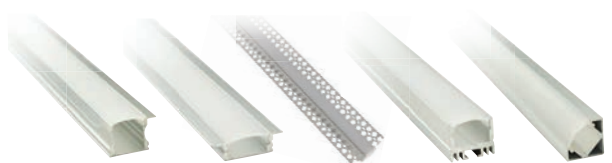

aluminium profile and drivers

## ceiling

72



ara pendant 100

73



ara pendant 60

74



compass 2

75



orbit 120

76-77



eternity 78 / 55 pendant

# contents

## ceiling

77



eternity 55 flush

78-79



hepburn

80



clip pendant

81



lino pendant

82



athena pendant

83



artemis

83



apollo pendant

84-85



honos / andromeda

86-87



orca / saturn

88



banda 

89



andaman 

90



lyra

91



vulcan

92-93



corona 

94



blob pendant

95



blob flush

96



3 light semi-flush

96



3 light -suspension

97



1lt suspension

## wall

100-101



sloane

102-103



southwark

102-103



shoreditch

104



ice

105



halkin

106-107



london bridge

108-109



vavin

110-111



veritas / venti 

112-113



tube / ovo

116



concorde

117



europe

118-119



sentier / mirabeau / monceau

120-121



mabillon / avron

122-123



cadet / voltaire

124



cambronne

125



odeon / opera

126-127



mini projector

128-129



universal shades

128



universal wall bracket

# contents

## wall

130-131



pimlico / reader

132-133



pimlico plus / reader

134



fenchurch

135



victoria / reader

136



victoria LED

137



victoria LED recessed

138-139



chelsea

187



acqua

## table & floor

142-143



libra

144-145



kensington

146-147



olympia

## shades

152-155



shades



## outdoor

158-159



strand / mayfair

160-161



berkeley

162-163



claridges / lanesborough

164-165



waldorf / connaught

166



dorchester

167



sanderson

168



grosvenor

169



grosvenor II

170-171



farrington

172-173



plot light

174



piccadilly

175




paddington

176-177



euston / hood

178-179

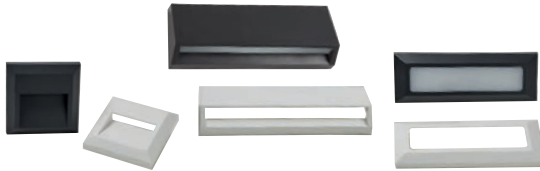

sapporo / suzuka

180-181



yokohama

182



chiba duo

183



tokyo

184



kobe

185



kyoto





recessed


# zeus features



## Benefits and features of the 'Zeus' All-in-One Universal Downlight:

- **Fire Rated** - Tested in 30, 60 and 90-minute fire-rated ceilings.
- **IP65** - Can be specified in bathrooms over shower / bath.
- **20° Tilt** - Can be used in a fixed or tilted orientation.
- **Anti-Glare** - Light source is set back from the face of the fitting.
- **Integrated Design** - Enables effective heat dissipation.
- **Dimmable** - Smooth and linear dimming.
- **Cameta™ Lens** - Provides high transparency and even light output.
- **Part L Compliant** - Adheres to the energy efficiency requirements of Part L of the Buildings Regulations.

## driver

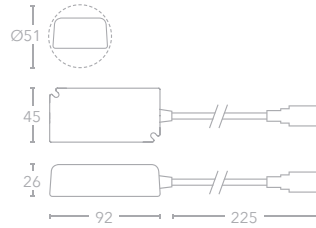


## Key Features

- UL 94 V0 fire resistant polycarbonate housing
- Loop in and loop out
- Up to 8A Max. current
- Glow wire: 650°C approved
- Compatible with dimmers
- No tools required



**CREE COB LED**  
SDCM<3  
Sharp Target  
2000K - 3000K  
Dim to Warm



**Cameta Lens**  
High transparency  
Even light  
protects the eye



**Rubycon capacitor**  
Ensures good quality



**Easy driver installation**  
Loop in and loop out design




DL-ZEUS3K




## zeus 3000K

DL-ZEUS3K   
 8.5W CREE COB 3000K ●  
 700 lumens

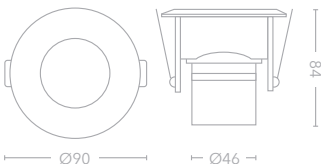

## zeus sunset

DL-ZEUSSUNSET   
 8.5W Sharp COB 2000-2800K ●  
 580 lumens

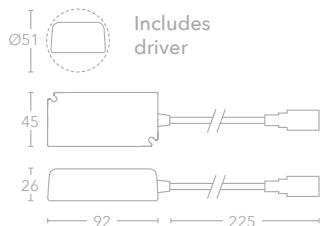


### Key Features

- Matt white finish / Aluminium / Carbon steel / Fireproof borosilicate glass
- Beam angle: 38° / 20° Tilt
- Power factor: 0.9 / 220-240V
- Anti-glare
- Bathroom zones 1 & 2, driver included
- Interchangeable bezel - See next page





## zeus GU10

DL-ZEUSGU10   
DL-ZEUSGU10BK 

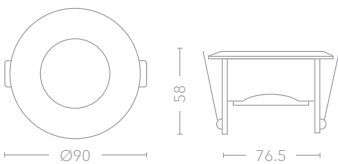


## accessories

DL-UNIRPC   
Polished chrome  
Bezel only



Ø90

DL-UNIRSN   
Satin nickel  
Bezel only

DL-UNISPG  
Spare clip, gasket  
& glass



### Key Features


- Matt painted finish / Aluminium / Carbon steel
- Fireproof borosilicate glass
- 220-240V / Anti-glare
- 20° Tilt
- Bathroom zones 1 & 2
- Interchangeable bezel



Products with this icon next to them are compatible with the Hera range of LED modules.

## hera

|            |  |                      |            |
|------------|--|----------------------|------------|
| DL-MOD13K  |  | CREE COB 3000K       | 700 lumens |
| DL-MOD14K  |  | CREE COB 4000K       | 750 lumens |
| DL-MOD2D2W |  | SHARP COB 2800-2000K | 580 lumens |

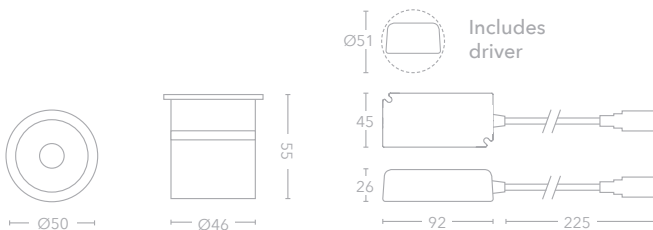

CLASS 3



DIMMABLE

### Key Features

Aluminium / White painted finish


8.5W / CRI >80

Beam angle: 38°

Power factor: 0.9 / 220-240V

Can be used as a replacement for a GU10 cap MR16 lamp shape on most fittings

Comes with dimmable driver, loop in loop out terminals

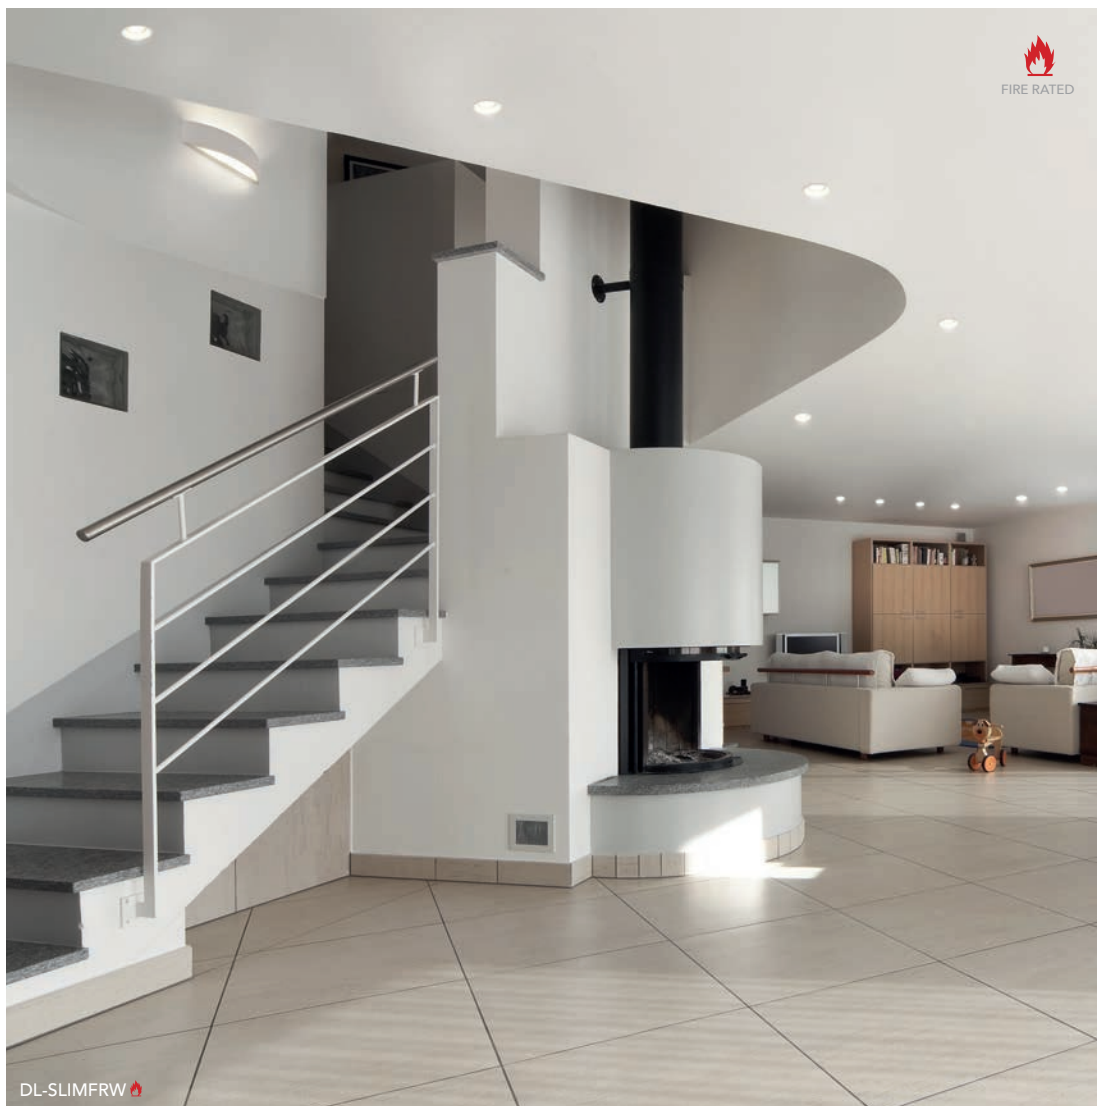

DL-SLIMFRW


## slim trim adjustable FR



DL-SLIMFRW 40° Tilt



CUT OUT  
86mm

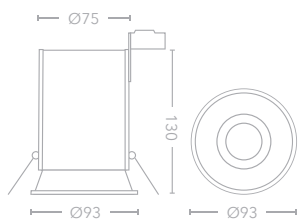

DL-SLIMFRW



CLASS 1



DIMMABLE

### Key Features

Matt white finish

220-240V / Max 10W LED only

Anti-glare / 15° Tilt

GU10 lampholder

Fire Rated - Tested in 30, 60 and 90 minute ceilings





NEW

DL-SLIMSQW



NEW

DL-SLIMSQB

DL-SLIMSQW



DL-SLIMW



DL-SLIMB

DL-SLIMW

**slim trim square adjustable**

NEW

- DL-SLIMSQB 40° Tilt ■
- DL-SLIMSQW 40° Tilt □




CUT OUT  
84x84mm

**slim trim adjustable**

- DL-SLIMB 40° Tilt ■
- DL-SLIMW 40° Tilt □



CUT OUT  
84mm

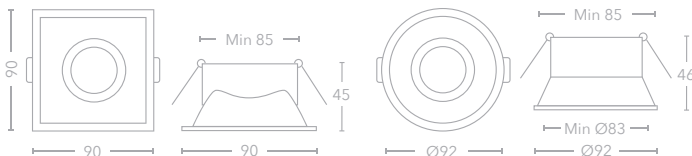

CLASS 2



DIMMABLE

**Key Features**

Matt white finish / Die cast body

220-240V / Max 10W LED only

Anti-glare / 15° Tilt

GU10 lampholder



**NEW**

DL-SLIMFRW

**FIRE RATED**

**slim trim  
 IP65 FR**

**FIRE RATED**

**NEW**


CLASS 1

DIMMABLE

IP 65

DL-SLIMIPFRW

CUT OUT  
 75mm

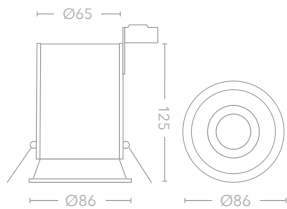

DL-SLIMIPFRW

**Key Features**

- Matt white finish
- 220-240V / Max 10W LED only
- Anti-glare
- GU10 lampholder
- Fire Rated - Tested in 30, 60 and 90 minute ceilings



recessed




**slim trim  
IP65**



- DL-SLIMIPB
- DL-SLIMIPW



CUT OUT  
75mm

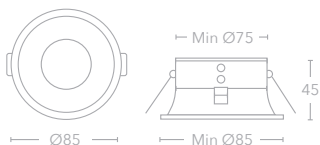

CLASS 2



DIMMABLE



IP  
65

**Key Features**

Matt white finish / Die cast body

220-240V / Max 10W LED only

Anti-glare

GU10 lampholder




Compatible with  
Hera module



## glacier round IP65

DL-GLAR

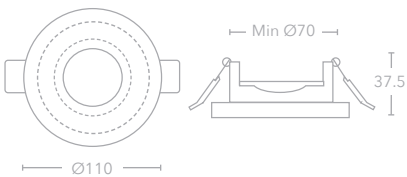

CLASS 2



DIMMABLE



IP 65

### Key Features

PMMA & Polished chrome

220-240V

GU10 lampholder

Suitable for use in  
Bathroom zones 1 & 2

LED only



DL-WASH



DL-WWW

## LED wall washer


DL-WASH 60° Tilt

8W COB LED

Class III



CUT OUT  
76mm





## GU10 wall washer

DL-WWW 40° Tilt

Class II



CUT OUT  
92mm



DIMMABLE

### Key Features

Sand white finish (LED) / Matt white finish (GU10) / Die cast body

220-240V / Anti-glare

CRI > 80 / 585 lumens (LED)

350° Rotation

Mains dimmable driver  
included with LED wall washer



DL-GRID1WW



DL-GRID1WB




DL-GRID1BB

## grid 1

DL-GRID1WW 

DL-GRID1WB 

DL-GRID1BB 

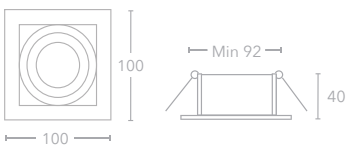

CLASS 2



DIMMABLE

### Key Features

Matt painted finish / Die cast body

220-240V

GU10 lampholder

15° Tilt / 360° Rotation

LED only



Compatible with  
Hera module



DL-GRID3WW



DL-GRID3WB



DL-GRID3BB



DL-GRID2WW




DL-GRID2WB



DL-GRID2BB


grid 3

- DL-GRID3WW
- DL-GRID3WB
- DL-GRID3BB

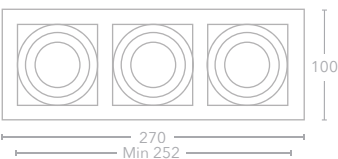

grid 2

- DL-GRID2WW
- DL-GRID2WB
- DL-GRID2BB

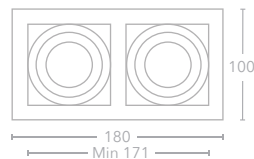

CLASS 2



DIMMABLE

Key Features

Matt painted finish / Die cast body

220-240V

GU10 lampholder

15° Tilt / 360° Rotation

LED only



Compatible with  
Hera module




DL-GRID2FRWB 🔥



DL-GRID1FRWW 🔥


**grid 1 FR** 🔥  
FIRE RATED

- DL-GRID1FRWW
- DL-GRID1FRWB

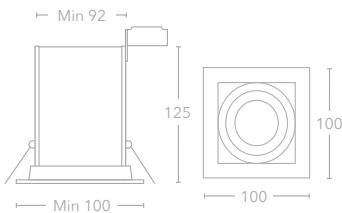

**grid 2 FR** 🔥 **NEW**  
FIRE RATED

- DL-GRID2FRWW
- DL-GRID2FRWB
- DL-GRID2FRBB

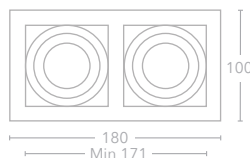

- CLASS 1
- DIMMABLE

**Key Features**

- ..... Matt painted finish / Die cast body
- ..... 220-240V
- ..... GU10 lampholder
- ..... 15° Tilt / 360° Rotation
- ..... LED only
- ..... Fire Rated - Tested in 30, 60 and 90 minute ceilings





NEW



NEW

PL-GRID1FR

FIRE RATED




PL-GRID1FR

**grid 1 FR**  
**trimless** FIRE RATED

PL-GRID1FR



CUT OUT  
85x85mm

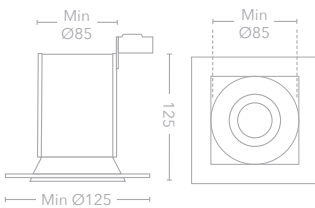

NEW



CLASS 1



DIMMABLE

**Key Features**

Matt white finish / Die cast body



220-240V / Max 10W LED only

Anti-glare / 15° Tilt

GU10 lampholder

Fire Rated - Tested in 30, 60 and 90 minute ceilings

Ceiling must be skimmed after fitting the item

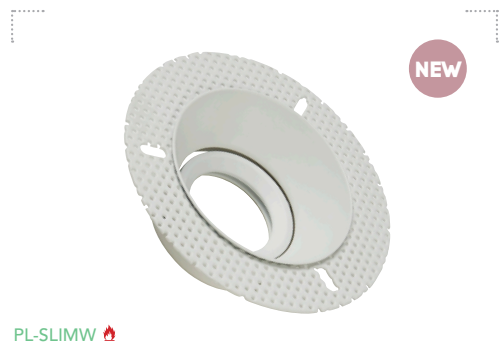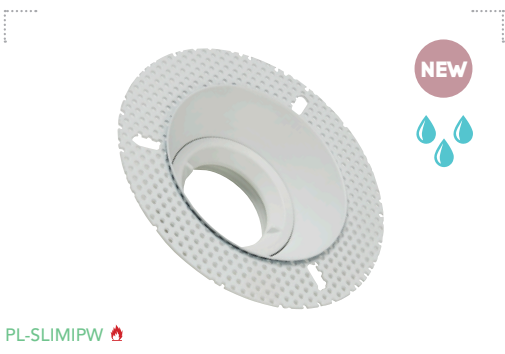


**slim trimless IP65**



PL-SLIMIPW



CUT OUT 85mm

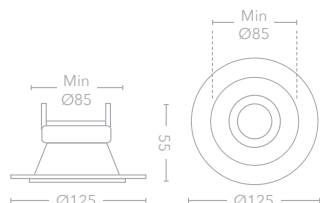


**slim trimless adjustable**



PL-SLIMW



CUT OUT 85mm

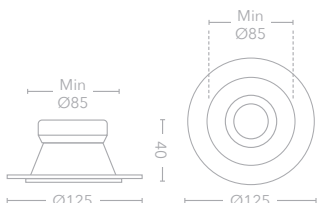

CLASS 2



DIMMABLE

**Key Features**

Matt white finish / Die cast body

220-240V / Max 10W LED only

Anti-glare / 15° Tilt

GU10 lampholder


Ceiling must be skimmed after fitting the item



Compatible with Hera module

NEW



PL-SLIMFRW 

**slim trimless adjustable FR**




NEW

PL-SLIMFRW 

Class I



CUT OUT  
86mm

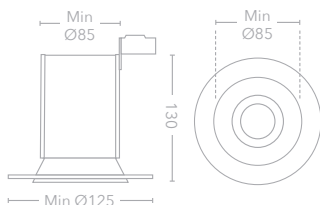

PL-SLIMFRW 



CLASS 1



DIMMABLE

**Key Features**

Matt white finish / Die cast body

220-240V / Max 10W LED only

Anti-glare / 15° Tilt

GU10 lampholder

Fire Rated - Tested in 30, 60 and 90 minute ceilings

Ceiling must be skimmed after fitting the item




PL-ROM1 / PL-ROM2



PL-ROM2

## rome


### PL-ROM1



 This symbol represents a white plaster finish

## rome twin

### PL-ROM2

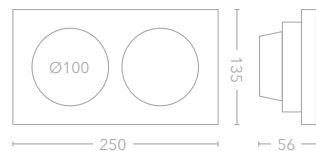

CLASS 1



DIMMABLE



PAINTABLE

### Key Features

White plaster

GU10 Class 1 earthed lampholder

Max. 10W LED only

Anti-glare

How to fit guide - See website

Ceiling must be skimmed before fitting the item



recessed / plaster




## trocadero adjustable

PL-TROCA 

Tilt angle: 40°



Check website for CUT OUT size

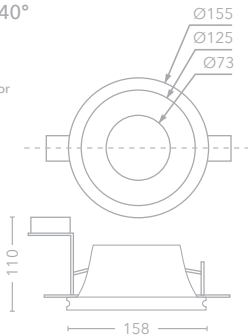


## telegraphe wall washer

PL-TELEG 

Lamp angle: 45°



CUT OUT  
222x222mm

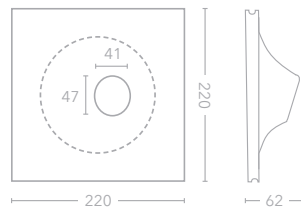

CLASS 1



DIMMABLE



PAINTABLE

### Key Features

White plaster


GU10 Class 1 earthed lampholder

Max. 10W LED only

Anti-glare

How to fit guide - See website

Ceiling must be skimmed  
before fitting the item

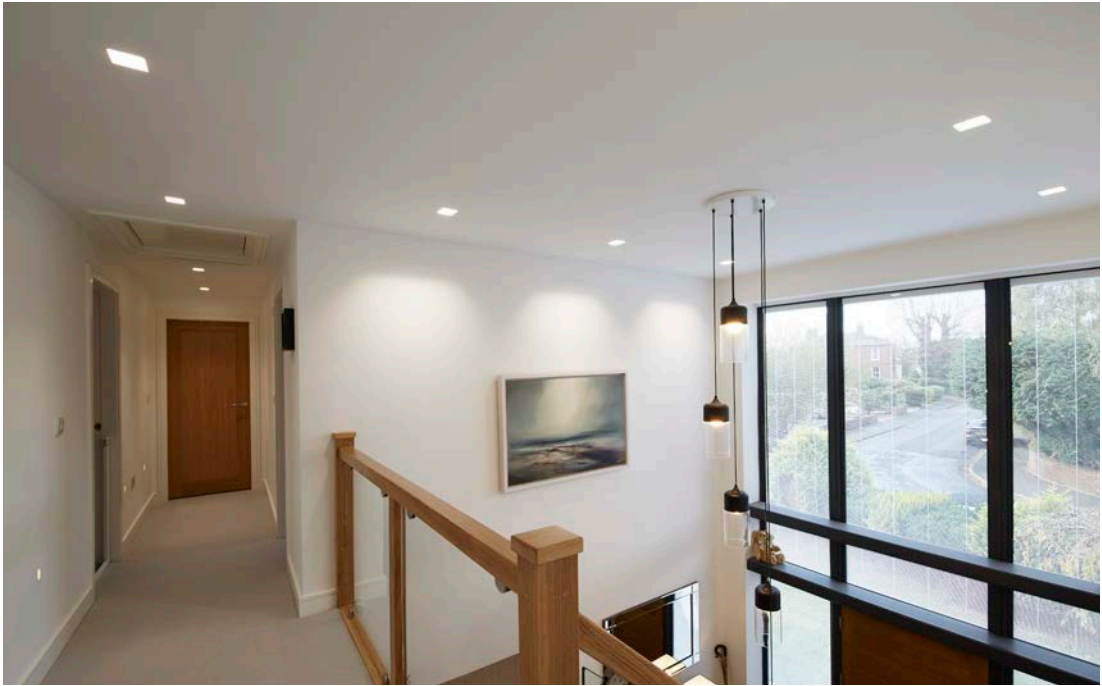

PL-REN1




PL-REN1

## renne

PL-REN1 

  
CUT OUT  
120x120mm



 This symbol represents a white plaster finish



CLASS 1



DIMMABLE



PAINTABLE

### Key Features

White plaster

GU10 Class 1 earthed lampholder

LED only

Anti-glare

How to fit guide - See website

Ceiling must be skimmed  
before fitting the item




PL-REN2



PL-RENWW


## renne twin

PL-REN2 



## renne wall washer

PL-RENWW 



CLASS 1



DIMMABLE



PAINTABLE

### Key Features

White plaster

GU10 Class 1 earthed lampholder

LED only

Anti-glare

How to fit guide - See website

Ceiling must be skimmed  
before fitting the item



PL-PYREN



PL-PYREN

## pyrenees plaster


| Item no.   | Finish                                 | Power | CCT   | Lumens | Dimmable  | Replaceable LED module |
|------------|--|-------|-------|--------|-----------|------------------------|
| PL-PYREN   | <input type="checkbox"/> White plaster | 350mA | 3000K | 60     | Dimmable* | MOD1W                  |
| PL-PYREN27 | <input type="checkbox"/> White plaster | 350mA | 2700K | 60     | Dimmable* | MOD1W2700              |

## simplon plaster

| Item no.   | Finish                                 | Power | CCT   | Lumens | Dimmable  | Replaceable LED module |
|------------|--|-------|-------|--------|-----------|------------------------|
| PL-SIMPL   | <input type="checkbox"/> White plaster | 350mA | 3000K | 60     | Dimmable* | MOD1W                  |
| PL-SIMPL27 | <input type="checkbox"/> White plaster | 350mA | 2700K | 60     | Dimmable* | MOD1W2700              |

\* Dimmable when used with a dimmable driver



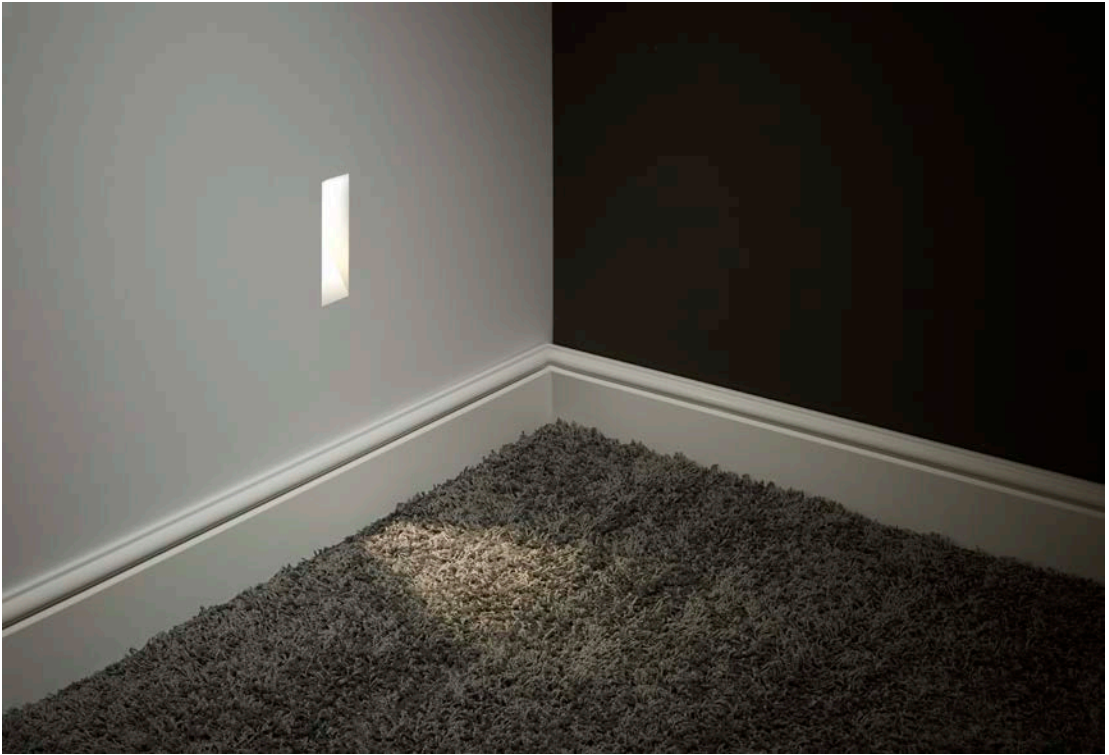


PL-SIMPL




PL-SIMPL

### pyrenees plaster

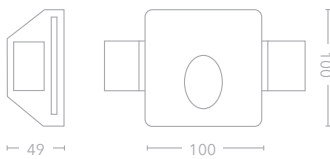



### simplon plaster

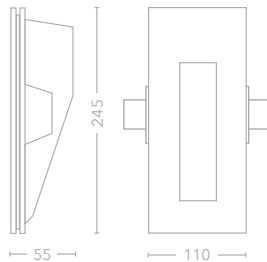

#### Key Features



- White plaster finish
- 1W CREE XPE LED / 3000K
- 350mA Operating current
- Driver supplied separately
- Fittings must be wired in series
- Not suitable for use in solid walls
- How to fit guide - See website
- Walls must be skimmed before fitting the item

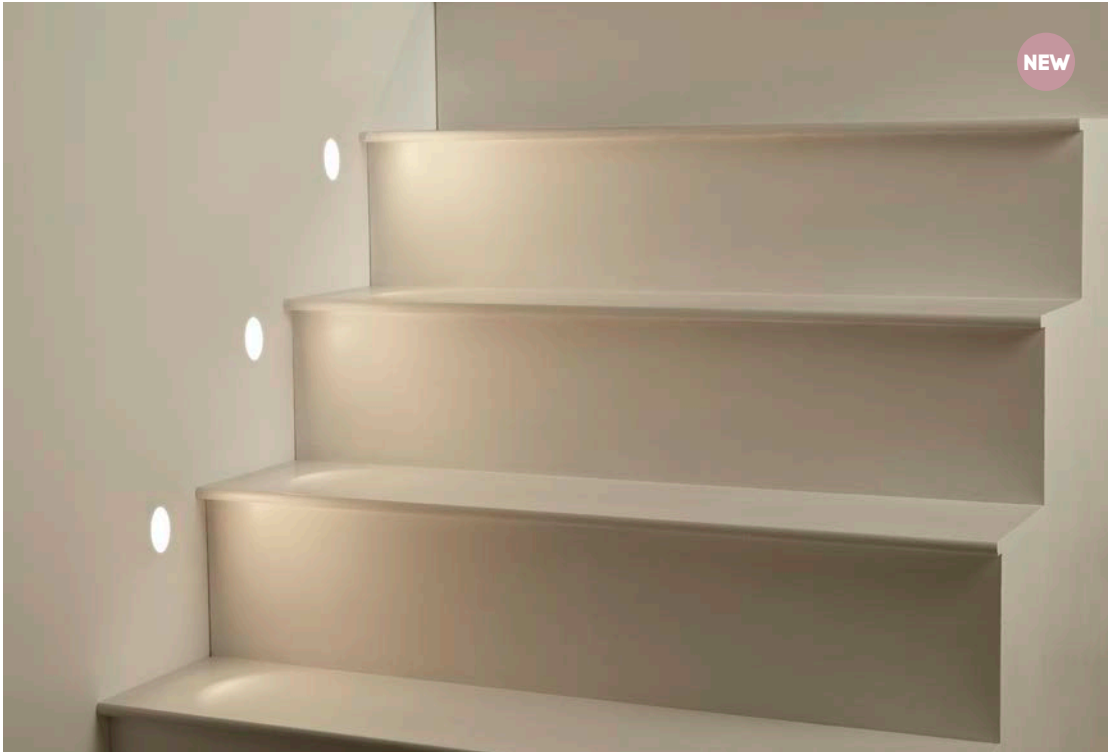NEW





PL-BOU

## boulogne LED



| Item no. | Finish                                 | Power | CCT   | Lumens | Dimmable  | Replaceable LED module |
|----------|--|-------|---|--------|-----------|------------------------|
| PL-BOU   | <input type="checkbox"/> White plaster | 350mA | 3000K  | 60     | Dimmable* | MOD1W                  |
| PL-BOU27 | <input type="checkbox"/> White plaster | 350mA | 2700K  | 60     | Dimmable* | MOD1W2700              |

## blanche LED

| Item no. | Finish                                 | Power | CCT   | Lumens | Dimmable  | Replaceable LED module |
|----------|--|-------|---|--------|-----------|------------------------|
| PL-BLA   | <input type="checkbox"/> White plaster | 350mA | 3000K  | 60     | Dimmable* | MOD1W                  |
| PL-BLA27 | <input type="checkbox"/> White plaster | 350mA | 2700K  | 60     | Dimmable* | MOD1W2700              |

\* Dimmable when used with a dimmable driver

NEW

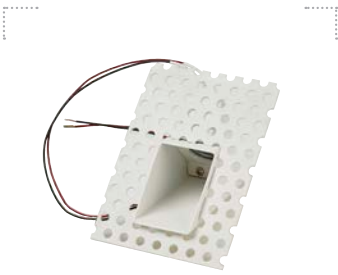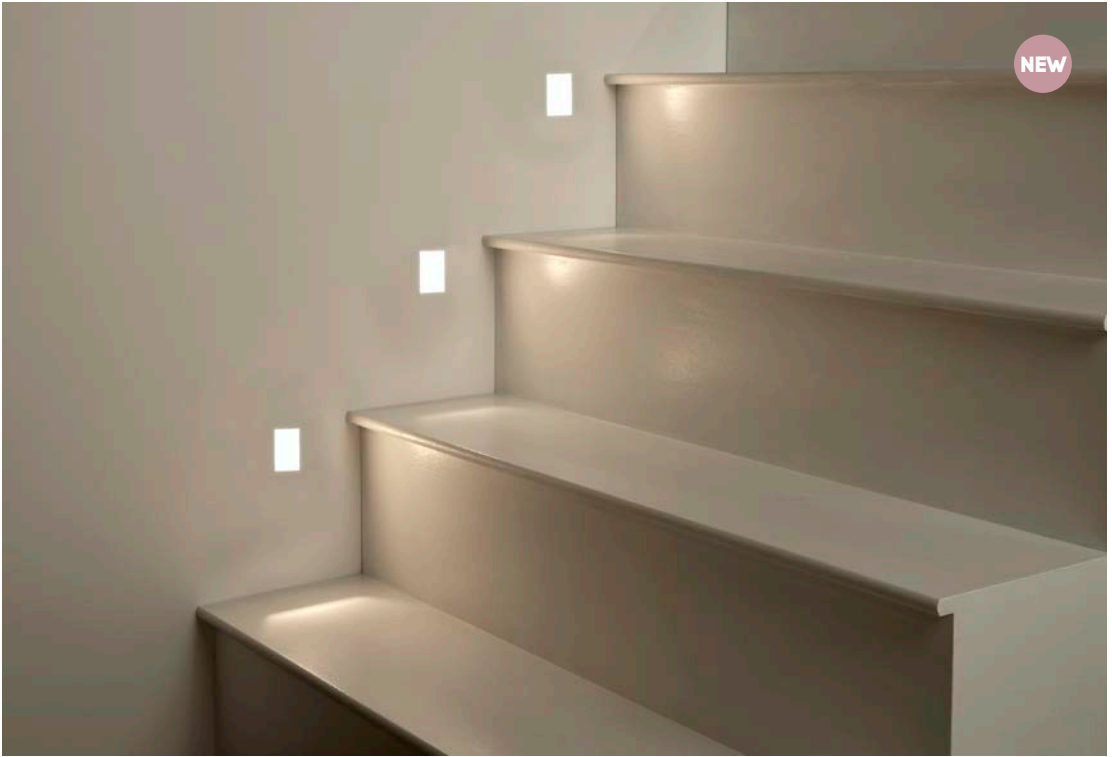



PL-BLA

**boulogne  
LED**

NEW

**blanche  
LED**

NEW

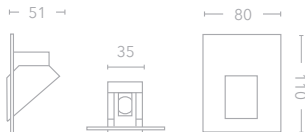

**Key Features**

Painted white finish

1W CREE XPE LED / 3000K

350mA Operating current

60 lumens

Driver supplied separately

Fittings must be wired in series

Walls must be skimmed after fitting the item




NEW



PL-BLAGU10

**blanche  
GU10**

PL-BLAGU10

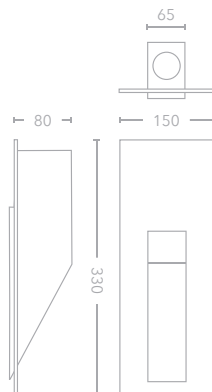

NEW



CLASS 2



DIMMABLE


**Key Features**

Painted white finish

GU10 LED only, max. 10W

Suitable for use in solid walls

Walls must be skimmed after fitting the item

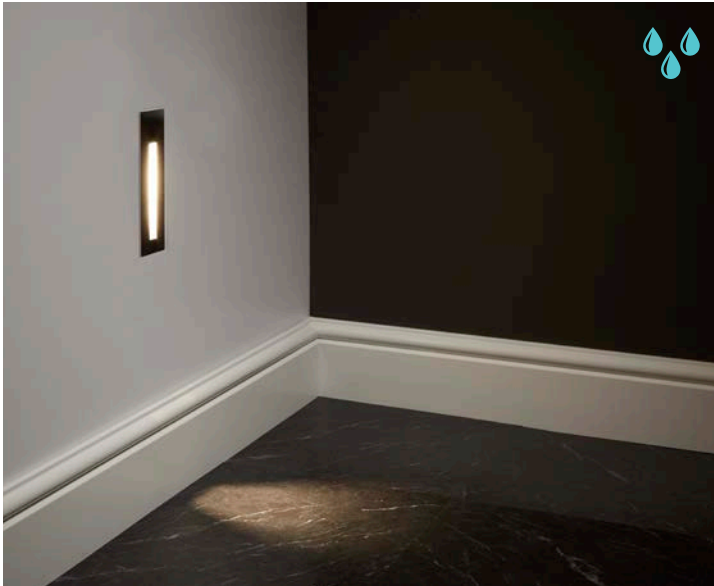

recessed / wall


IPR-WSLW

| Item no.       | Finish          | Power        | CCT   | Lumens | IP Rating | Dimmable | Replaceable LED module | Class |
|----------------|-----------------|--------------|-------|--------|-----------|----------|------------------------|-------|
| IPR-WSLW       | White           | 350mA        | 3000K | 95     | 65        | Yes*     | MOD1WIP                | III   |
| IPR-WSLW-AC    | White           | 220 - 240V** | 3000K | 95     | 65        | No       | MOD1WIP230V            | I     |
| IPR-WSLW27     | White           | 350mA        | 2700K | 95     | 65        | Yes*     | MOD1WIP-2700           | III   |
| IPR-WSLW27-AC  | White           | 220 - 240V** | 2700K | 95     | 65        | No       | MOD1WIP230V-2700       | I     |
| IPR-WSLCP      | Polished chrome | 350mA        | 3000K | 95     | 65        | Yes*     | MOD1WIP                | III   |
| IPR-WSLCP-AC   | Polished chrome | 220 - 240V** | 3000K | 95     | 65        | No       | MOD1WIP230V            | I     |
| IPR-WSLW27     | Polished chrome | 350mA        | 2700K | 95     | 65        | Yes*     | MOD1WIP-2700           | III   |
| IPR-WSLCP27-AC | Polished chrome | 220 - 240V** | 2700K | 95     | 65        | No       | MOD1WIP230V-2700       | I     |
| IPR-WLSLN      | Satin nickel    | 350mA        | 3000K | 95     | 65        | Yes*     | MOD1WIP                | III   |
| IPR-WLSLN-AC   | Satin nickel    | 220 - 240V** | 3000K | 95     | 65        | No       | MOD1WIP230V            | I     |
| IPR-WLSLN27    | Satin nickel    | 350mA        | 2700K | 95     | 65        | Yes*     | MOD1WIP-2700           | III   |
| IPR-WLSLN27-AC | Satin nickel    | 220 - 240V** | 2700K | 95     | 65        | No       | MOD1WIP230V-2700       | I     |

\*Dimmable when used with dimmable driver \*\*Integrated driver

## simplon IP65

CUT OUT  
40x147mm

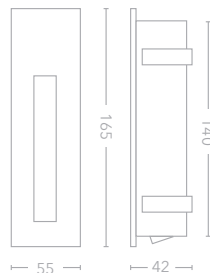

### Key Features

- Aluminium body
- 1W CREE XPE LED
- Bathroom zones 1 & 2
- Wall mounted
- 350mA items require a separate driver
- Not suitable for use in solid walls



IPR-WVOW



IPR-WVOSN

| Item no.       | Finish         | Power        | CCT   | Lumens | IP Rating | Dimmable | Replaceable LED module | Class |
|----------------|----------------|--------------|-------|--------|-----------|----------|------------------------|-------|
| IPR-WVOW       | □ White        | 350mA        | 3000K | 95     | 65        | Yes*     | MOD1WIP                | III   |
| IPR-WVOW-AC    | □ White        | 220 - 240V** | 3000K | 95     | 65        | No       | MOD1WIP230V            | I     |
| IPR-WVOW27     | □ White        | 350mA        | 2700K | 95     | 65        | Yes*     | MOD1WIP-2700           | III   |
| IPR-WVOW27-AC  | □ White        | 220 - 240V** | 2700K | 95     | 65        | No       | MOD1WIP230V-2700       | I     |
| IPR-WVOSN      | ■ Satin nickel | 350mA        | 3000K | 95     | 65        | Yes*     | MOD1WIP                | III   |
| IPR-WVOSN-AC   | ■ Satin nickel | 220 - 240V** | 3000K | 95     | 65        | No       | MOD1WIP230V            | I     |
| IPR-WVOSN27    | ■ Satin nickel | 350mA        | 2700K | 95     | 65        | Yes*     | MOD1WIP-2700           | III   |
| IPR-WVOSN27-AC | ■ Satin nickel | 220 - 240V** | 2700K | 95     | 65        | No       | MOD1WIP230V-2700       | I     |



\*Dimmable when used with dimmable driver \*\*Integrated driver

## vosges IP65

\*can be used in solid walls



CUT OUT  
60mm



### Key Features


Aluminium body

1W CREE XPE LED

Bathroom zones 1 & 2

Wall mounted

350mA items require a separate driver

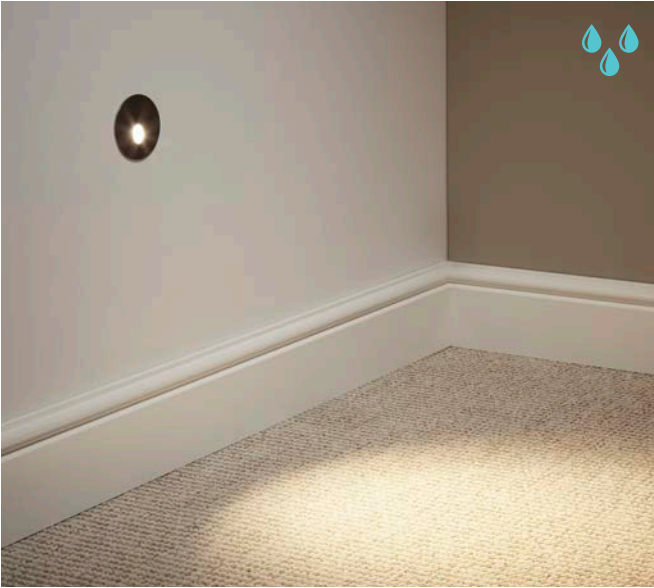

IPR-WRW

| Item no.      | Finish          | Power        | CCT   | Lumens | IP Rating | Dimmable | Replaceable LED module | Class |
|---------------|-----------------|--------------|-------|--------|-----------|----------|------------------------|-------|
| IPR-WRW       | White           | 350mA        | 3000K | 95     | 65        | Yes*     | MOD1WIP                | III   |
| IPR-WRW-AC    | White           | 220 - 240V** | 3000K | 95     | 65        | No       | MOD1WIP230V            | I     |
| IPR-WRW27     | White           | 350mA        | 2700K | 95     | 65        | Yes*     | MOD1WIP-2700           | III   |
| IPR-WRW27-AC  | White           | 220 - 240V** | 2700K | 95     | 65        | No       | MOD1WIP230V-2700       | I     |
| IPR-WRCP      | Polished chrome | 350mA        | 3000K | 95     | 65        | Yes*     | MOD1WIP                | III   |
| IPR-WRCP-AC   | Polished chrome | 220 - 240V** | 3000K | 95     | 65        | No       | MOD1WIP230V            | I     |
| IPR-WRW27     | Polished chrome | 350mA        | 2700K | 95     | 65        | Yes*     | MOD1WIP-2700           | III   |
| IPR-WRCP27-AC | Polished chrome | 220 - 240V** | 2700K | 95     | 65        | No       | MOD1WIP230V-2700       | I     |
| IPR-WRSN      | Satin nickel    | 350mA        | 3000K | 95     | 65        | Yes*     | MOD1WIP                | III   |
| IPR-WRSN-AC   | Satin nickel    | 220 - 240V** | 3000K | 95     | 65        | No       | MOD1WIP230V            | I     |
| IPR-WRSN27    | Satin nickel    | 350mA        | 2700K | 95     | 65        | Yes*     | MOD1WIP-2700           | III   |
| IPR-WRSN27-AC | Satin nickel    | 220 - 240V** | 2700K | 95     | 65        | No       | MOD1WIP230V-2700       | I     |




\*Dimmable when used with dimmable driver \*\*Integrated driver

## pyrenees IP65

\*can be used in solid walls



CUT OUT  
60mm



### Key Features

Aluminium body

1W CREE XPE LED

Bathroom zones 1 & 2

Wall mounted

350mA items require a separate driver



## holborn round IP65



IPR-HOLCP

IPR-HOLSS

## hoxton square IP65

IPR-HOXCP

IPR-HOXSS

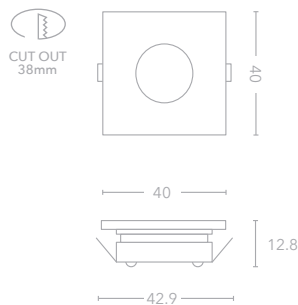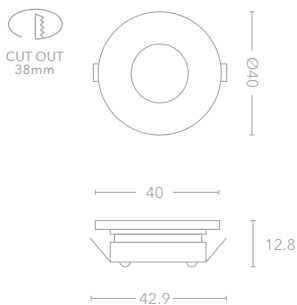

### Key Features

Polished chrome or satin stainless steel 316 / Aluminium body

1W CREE XPE / 3000K

Operating current: 350mA

90 lumens / Beam angle: 120°

Very shallow profile


Bathroom zones 1 & 2

Driver supplied separately

Fittings must be wired in series




## holborn anti glare IP65

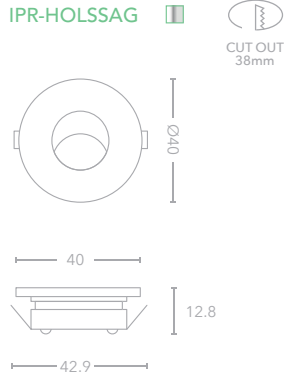

### Key Features

- Satin stainless steel 316
- 1W CREE XPE / 3000K
- 25 lumens / Beam angle: 120°
- Very shallow profile
- Bathroom zones 1 & 2
- Driver supplied separately
- Fittings must be wired in series


## ankle light

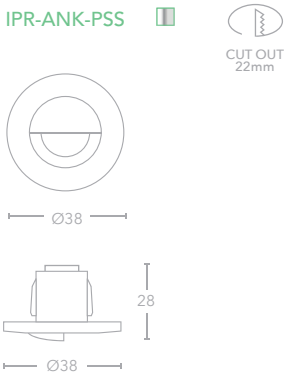

### Key Features

- 316L Mirror polished stainless steel body
- 1.2W LED / 3000K
- 95 lumens / Beam angle 120°
- Bathroom zones 1 & 2
- Driver supplied separately
- Fittings must be wired in series

## diana

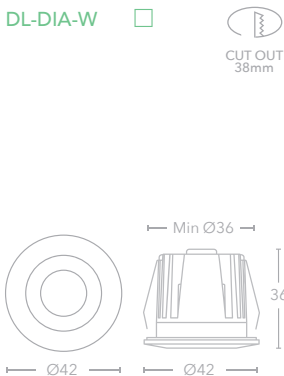

### Key Features

- Sand white finish / Die cast body
- 1.1W Olsen LED / 3000K
- 95 lumens / Beam angle 30°
- Bathroom zone 2
- Driver supplied separately
- Fittings must be wired in series



# track & spot





TR-APO-W

TR-APO-B

## apollo GU10 track spot


NEW



### Key Features

- Steel / Sand white or Sand black head
- GU10 LED only / Max. 10W
- Track mounted head
- 350° Rotation / 90° Tilt
- 58mm max lamp length
- On/Off switch on track connector

- TR-APO-B ■
- TR-APO-W □

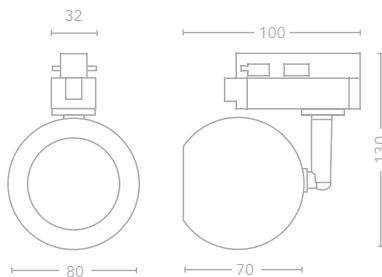




TR-PEG-W

TR-PEG-B

## pegasus GU10 track spot

- TR-PEG-B ■
- TR-PEG-W □

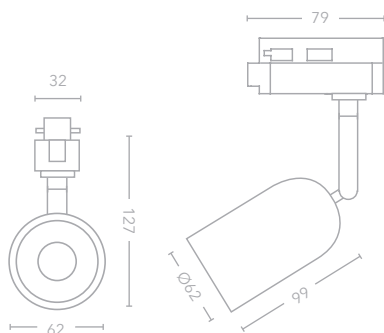

-  CLASS 1
-  SWITCH
-  DIMMABLE

### Key Features

- Steel / Sand white or Sand black head
- GU10 LED only / Max. 10W
- Track mounted head
- 350° Rotation / 90° Tilt
- 58mm max lamp length
- On/Off switch on track connector



NEW

NEW



TR-AND-W



TR-AND-B




TR-LIB-WW

## andromeda track spot

- TR-AND-B ■
- TR-AND-W □

NEW

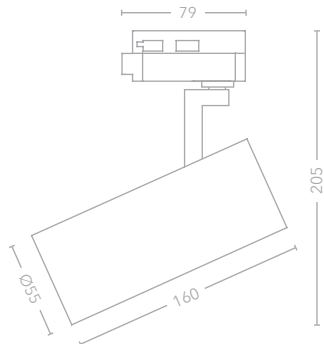

CLASS 2



SWITCH



DIMMABLE

### Key Features

- Die cast construction / Sand white or Sand black head
- GU10 LED only / Max. 10W
- Track mounted head
- 350° Rotation / 90° Tilt
- On/Off switch on track connector




TR-LIB-B

TR-ORI-W

TR-ORI-B

### libra GU10 track spot


- TR-LIB-B ■
- TR-LIB-WW □

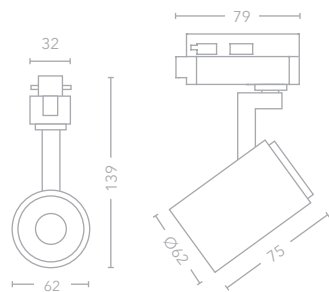

### orion track spot

NEW

- TR-ORI-B ■
- TR-ORI-W □

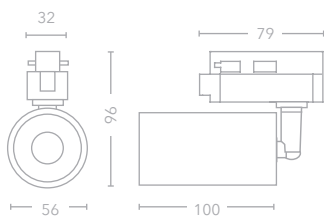

- CLASS 2
- SWITCH
- DIMMABLE

#### Key Features

- Die cast construction / Sand white or Sand black head
- GU10 LED only / Max. 10W
- Track mounted head
- 350° Rotation / 90° Tilt
- 58mm max lamp length
- On/Off switch on track connector




TR-GEM-W



TR-GEM-B

## gemini 13w LED track spot

TR-GEM-B ■  
 TR-GEM-W □  
 1280 lumens

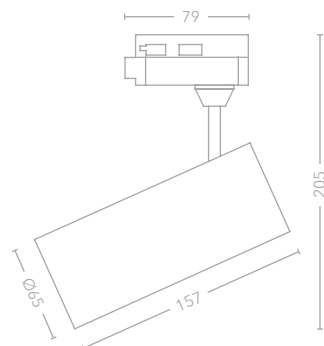

CLASS 1



SWITCH




DIMMABLE

### Key Features

Die cast construction / Sand white with Silver ring and interchangeable White ring / Sand black with Gold ring and interchangeable Black ring  
 13W COB LED / TRIAC dimmable  
 36° Beam angle  
 350° Rotation / 90° Tilt  
 On/Off switch on track connector



NEW

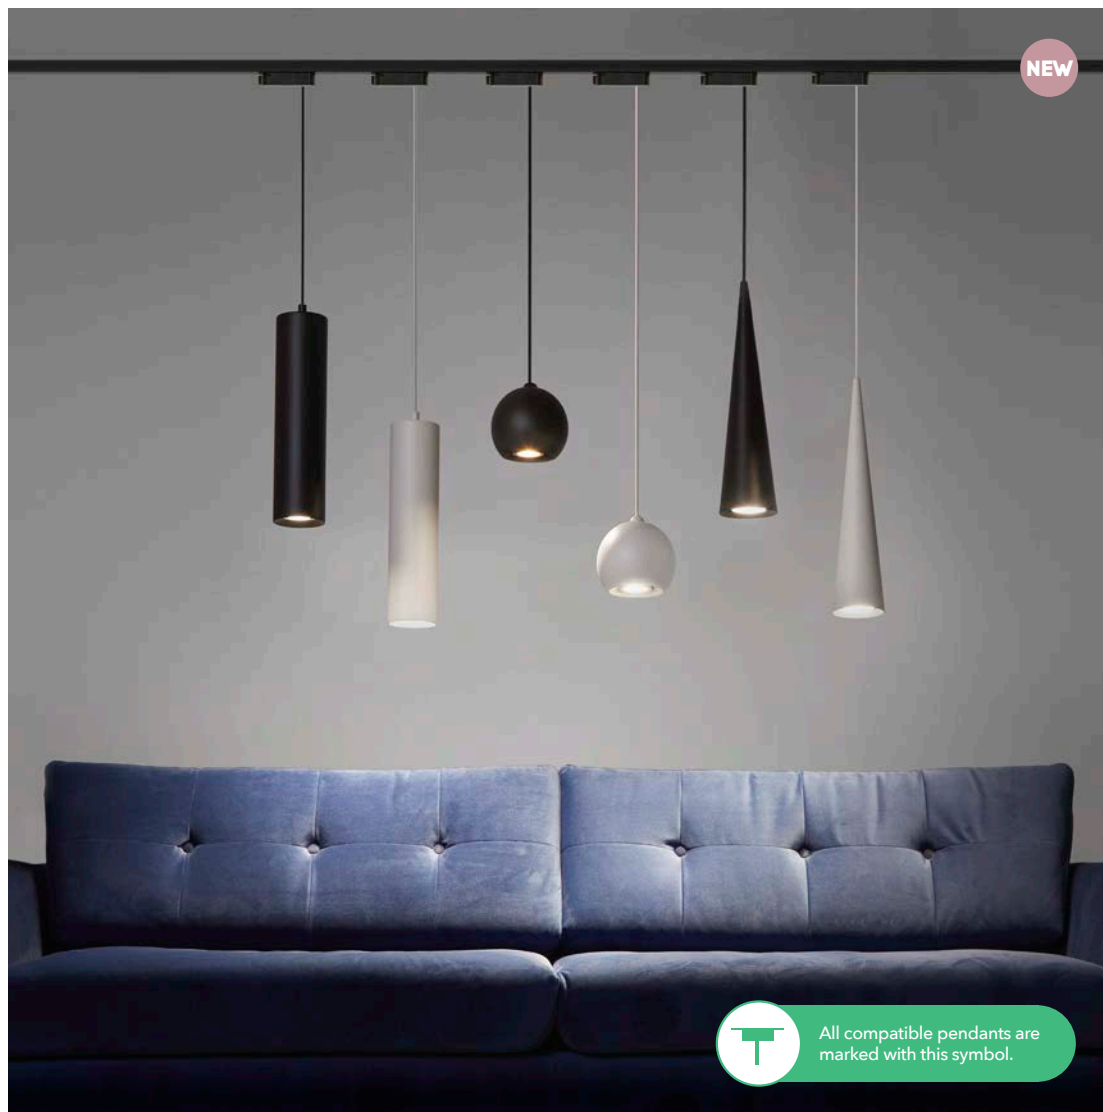

All compatible pendants are marked with this symbol.

## pendant track adapter

NEW

- TR-PEN-B ■
- TR-PEN-W □

Use with any 220-240V pendant under 2kg that is suspended by a single power cable.



CLASS 1



DIMMABLE



240 VOLTS

### Key Features

Used to convert mains voltage pendants meeting the following criteria:

1. Suspended by a single power cable
2. Maximum 2kg weight



All compatible pendants are marked with this symbol



TR-1W / TR-1B

### 1m track kit

TR-1B

TR-1W

Includes live end & end cap  
L1000 x W35 x H18mm

### 1m track only

TR-T1-B

TR-T1-W

L1000 x W35 x H18mm

### 2m track kit

TR-2B

TR-2W

Includes live end & end cap  
L2000 x W35 x H18mm

### 2m track only

TR-T2-B

TR-T2-W

L2000 x W35 x H18mm



CLASS 1



DIMMABLE



240 VOLTS

#### Key Features

Extensive range of track & connectors

Ideal for applications where fittings need to be moved or added

Track can be cut to any length

Earth on the neutral side




TR-EC-W



TR-LE-W




TR-MJ-W

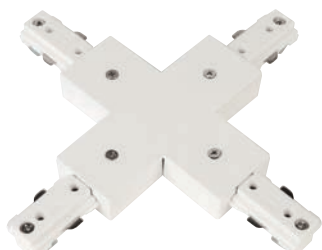

TR-XC-W




TR-LC-W



TR-TC-W



TR-SUS-W

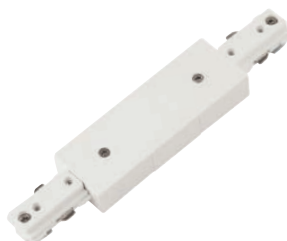

TR-CC-W



TR-CC-B  
All options available in Black

### end cap

TR-EC-B

TR-EC-W

L18 x W35 x H18mm

### live end

TR-LE-B

TR-LE-W

L108 x W35 x H18mm

### mini joiner

TR-MJ-B

TR-MJ-W

L80 x W35 x H18mm

### X connector

TR-XC-B

TR-XC-W

L182 x W182 x H18mm

### L connector

TR-LC-B

TR-LC-W

L108 x W108 x H18mm

### T connector

TR-TC-B

TR-TC-W

L182 x W108 x H18mm

### 3m suspension kit

TR-SUS-B

TR-SUS-W

### centre connector

TR-CC-B  With power feed in

TR-CC-W  L180 x W35 x H18mm



CLASS 1



DIMMABLE



240 VOLTS

#### Key Features

Extensive range of track & connectors

Ideal for applications where fittings need to be moved or added

Earth on the neutral side

Suspension kit length is adjustable

NEW





**moon 1** **NEW**





**moon 1 round**

**moon recessed** **NEW**

- SP-MOO1-B ■
  - SP-MOO1-W □
  - SP-MOO1S-B\* ■
  - SP-MOO1S-W\* □
- 1 x GU10 LED

- SP-MOO1R-B ■
  - SP-MOO1R-W □
- 1 x GU10 LED
- Class I

- SP-MOOR-B ■
  - SP-MOOR-W □
- 1 x GU10 LED
- Class II



\* Switched



**Key Features**

Sand white or Sand black /  
Die cast construction

GU10 LED only / Max. 10W each

Ceiling / Wall mounted

350° Rotation

90° Pivot

58mm max lamp length

Cut out for SP-MOOR 60-85mm



SP-MOO3-B



SP-MOO3-W




SP-MOO3L-W



SP-MOO3L-B

### moon 3


SP-MOO3-B ■  
 SP-MOO3-W □  
 3 x GU10 LED

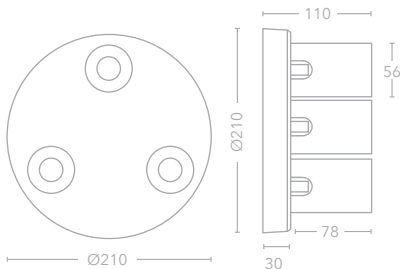

### moon 3 bar

SP-MOO3L-B ■  
 SP-MOO3L-W □  
 3 x GU10 LED

NEW

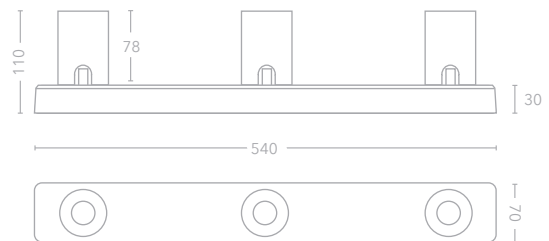

NEW



SP-MOO3L-B / SP-MOO4-B



SP-MOO2-W



SP-MOO4-W



**moon 4 bar**

SP-MOO4-B ■  
 SP-MOO4-W □  
 4 x GU10 LED

**moon 2 bar**

SP-MOO2-B ■  
 SP-MOO2-W □  
 2 x GU10 LED

NEW

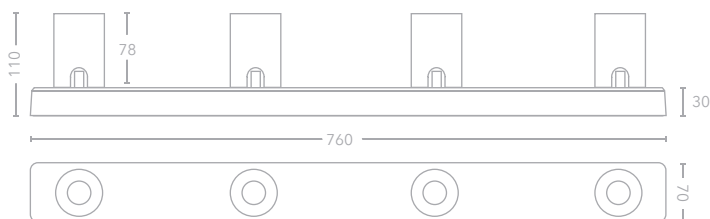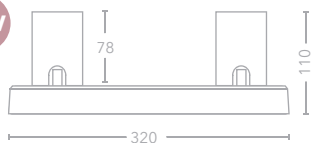

CLASS 1



DIMMABLE

**Key Features**

Sand white or Sand black /  
 Die cast construction

GU10 LED only / Max. 10W each

Ceiling / Wall mounted

350° Rotation

90° Pivot

58mm max lamp length

NEW



SP-SEL3R-W




SP-SEL3R-B

## selene 3 round

SP-SEL3R-B ■

SP-SEL3R-W □

3 x GU10 LED

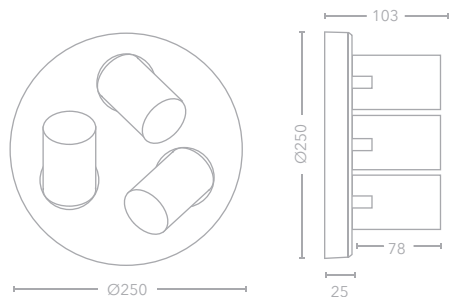

NEW



CLASS 2



DIMMABLE



IP44



GLASS

### Key Features

Sand white or Sand black /  
Die cast construction

GU10 LED only / Max. 10W each

Ceiling / Wall mounted

350° Rotation

90° Pivot

58mm max lamp length





SP-SEL3L-B




SP-SEL3L-W

## selene 3 long

SP-SEL3L-B ■

SP-SEL3L-W □

3 x GU10 LED

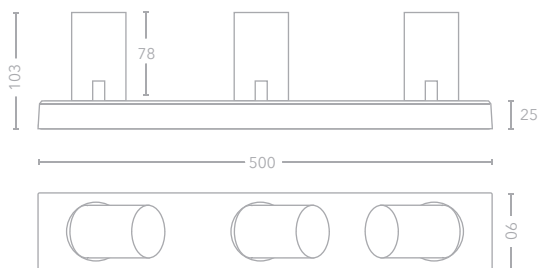

CLASS 2



DIMMABLE



IP 44



GLASS

### Key Features

Sand white or Sand black /  
Die cast construction

GU10 LED only / Max. 10W each

Ceiling / Wall mounted

350° Rotation

90° Pivot

58mm max lamp length

NEW





SP-APO3-W

SP-APO1-W

### apollo 3

- SP-APO3-B ■
- SP-APO3-W □
- 3 x GU10 LED
- Class I

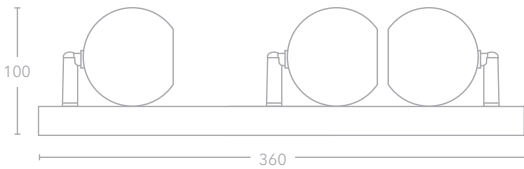


NEW

### apollo 2

- SP-APO2-B ■
- SP-APO2-W □
- 2 x GU10 LED
- Class I


NEW

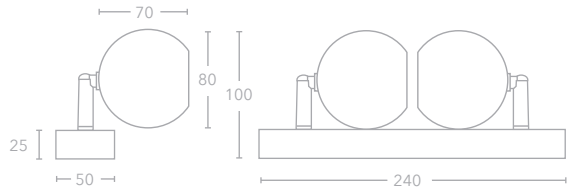



**apollo 1**

- SP-APO1-B ■
- SP-APO1-W □
- 1 x GU10 LED
- Class I

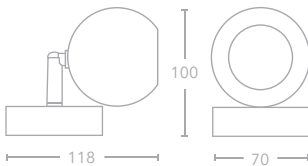


NEW

**apollo recessed**

- SP-APOR-B ■
- SP-APOR-W □
- 1 x GU10 LED
- Class II

NEW

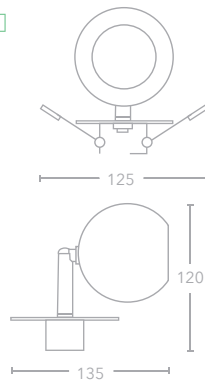

DIMMABLE

**Key Features**

Steel / Sand white or Sand black

GU10 LED / Max. 10W

Ceiling / Wall mounted

350° Rotation

90° Pivot

58mm max lamp length

Cut out for SP-APOR 60-85mm

NEW





SP-JUP1-W



SP-JUP2-B



SP-JUP1-B




SP-JUP2-W

## jupiter 1

NEW


SP-JUP1--B ■  
 SP-JUP1-W □  
 1 x ES111



## jupiter 2

NEW

SP-JUP2-B ■  
 SP-JUP2-W □  
 2 x ES111

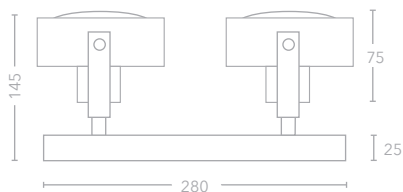

CLASS 1



DIMMABLE

### Key Features

Steel / Sand white or  
 Sand black

ES111 Max. 75W

Ceiling / Wall mounted

350° Rotation

120° Pivot



# led strip

## guide to using LED strip

### ① choose your strip and connectors

- 4.8W/m - feature glow of light
- 14.4W/m - ambient light

### ② choose your colour temperature

- Cool White is 4000K ●
- Warm White is 3000K ●

### ③ choose your profile

- Recessed profiles conceal lines of light
- Surface mounted profiles are easy to fit
- Use corner profile for angling the strip at 45° to a surface, particularly useful for lighting shelves, inside wardrobes and over kitchen worktops
- A profile must be used with 14.4W/m strips

### ④ select your driver


- Multiply the total number of metres of strip to be run from a single driver by the wattage of the strip and then add 10% e.g. 16m of 4.8W/m strip plus 10% = 85W
- Decide if your circuit needs to be dimmable
- Select the driver e.g. dimmable LST-DRD80, non-dimmable LST-DR100



LST-4-3-IP / LST-4-3



LST-CON3

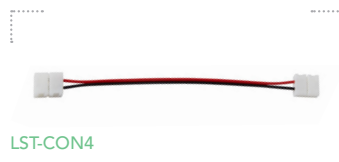

LST-CON4

Driver:  
Supplied separately  
See page 68-69



## 4.8w/m LED strip IP65



73 lumens per Watt

LST-4-3-IP ● 3000K

LST-4-4-IP ● 4000K

## 4.8w/m LED strip

83 lumens per Watt

LST-4-3 ● 3000K

LST-4-4 ● 4000K



CLASS 3



DIMMABLE



24 VOLTS

### Key Features

5 metre roll

CRI Ra>80

3528 Epistar SMD LED

2oz double sided PCB for  
longer strip runs

Power feed-in required every 10m

Cut distance every 100mm

Supplied with 150mm tails  
on both ends





**8mm inline connector**

LST-CON3



**8mm corner connector / power feed in**

LST-CON4  
2 x Wire





LST-14-3-IP / LST-14-3



LST-CON1



LST-CON2

Driver:  
Supplied separately  
See page 68-69



## 14.4w/m LED strip IP65



90 lumens per Watt

- LST-14-3-IP ● 3000K
- LST-14-4-IP ● 4000K

## 14.4w/m LED strip

100 lumens per Watt

- LST-14-3 ● 3000K
- LST-14-4 ● 4000K



CLASS 3



DIMMABLE



24 VOLTS

### Key Features

5 metre roll

CRI Ra>80 / 24V / 3000K

2835 Epistar SMD LED

2oz double sided PCB for  
longer strip runs

Power feed-in required every 10m

Cut distance every 100mm

Supplied with 150mm tails  
on both ends

Aluminium profile must be used



### 10mm inline connector

LST-CON1



15

### 10mm corner connector / power feed in

LST-CON2

2 x Wire



15

160



LST-PRO-R1



LST-PRO-HS




LST-PRO-PL1

## recessed aluminium profile

LST-PRO-R1


L1000 x W25 x H16mm

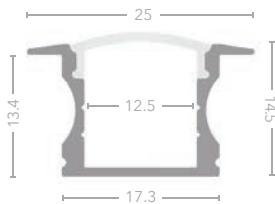

## aluminium heat sink

LST-PRO-HS


L1000 x W25 x H8mm

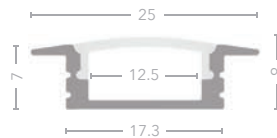

## plastered in profile

LST-PRO-PL1

L1000 x W55.5 x H15mm

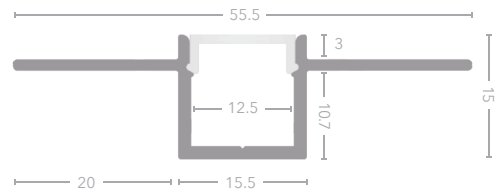



LST-PRO-SM1




LST-PRO-COR

## surface mounted aluminium profile

LST-PRO-SM1


L1000 x W17.2 x H15mm



## 45° corner profile

LST-PRO-COR

L1000 x W18.1 x H18.1mm



### Key Features

Aluminium / Opal PC diffuser

Includes 2 x End caps

2 x Installation clips with surface profile



LST-DRD200



LST-DRD150



LST-DRD120



LST-DRD80

## LED drivers - dimmable

INPUT POWER  
+/-220-250V

MAINS  
DIMMER

DIMMING  
SYSTEM

MAINS  
DIM DRIVER

LED STRIP

LED STRIP

### TRIAC dimmable 24v 200w driver

LST-DRD200

### TRIAC dimmable 24v 150w driver

LST-DRD150

### TRIAC dimmable 24v 120w driver

LST-DRD120

### TRIAC dimmable 24v 80w driver

LST-DRD80



IP  
66



DIMMABLE



24 VOLTS

#### Key Features

PWM Output

Loading: 1-100%

Short circuit protection

TRIAC Dimmable

Dimming range: 0-100%

Leading and trailing edge

Lutron & Clipsal C-BUS compatible



LST-DR150



LST-DR100



LST-DR75



LST-DR50



LST-DR20

### LED drivers - non dimmable

INPUT POWER  
+/-220-250V

ON/OFF



LED STRIP

### LED 24v 150w driver

LST-DR150

### LED 24v 100w driver

LST-DR100

### LED 24v 75w driver

LST-DR75

### LED 24v 50w driver

LST-DR50

### LED 24v 20w driver

LST-DR20



CLASS 2



24 VOLTS

#### Key Features

Loading: 1-100%

Over load, short circuit and thermal protection







# ceiling

NEW





## ara pendant 100

PE-ARA100-B ■

PE-ARA100-W □

60W SMD LED



NEW



CLASS 1



DIMMABLE



### Key Features

Sand white or Black body /  
Frosted acrylic diffuser

3000K / 4000K switchable

Switch in ceiling can

Mains dimmable

Power factor 0.95 / CRI >80

5600 lumens at 4000K

5400 lumens at 3000K



PE-ARA60-W



PE-ARA100-B



PE-ARA60-W




## ara pendant 60

PE-ARA60-B ■

PE-ARA60-W □

30W SMD LED

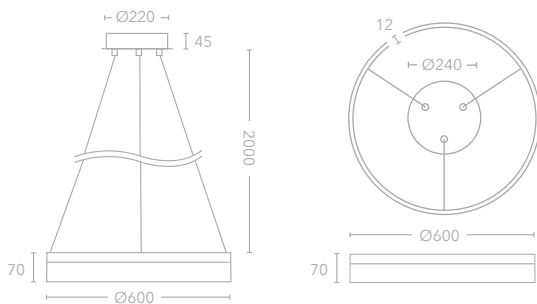

NEW



CLASS 1



DIMMABLE



### Key Features

Sand white or Black body /  
Frosted acrylic diffuser

3000K / 4000K switchable

Switch in ceiling can

Mains dimmable

Power factor 0.95 / CRI >80

2800 lumens at 4000K

2700 lumens at 3000K



PE-COM2-B




PE-COM2-W

## compass 2

PE-COM2-B ■ 6000 lumens

PE-COM2-W □ 92W SMD LED

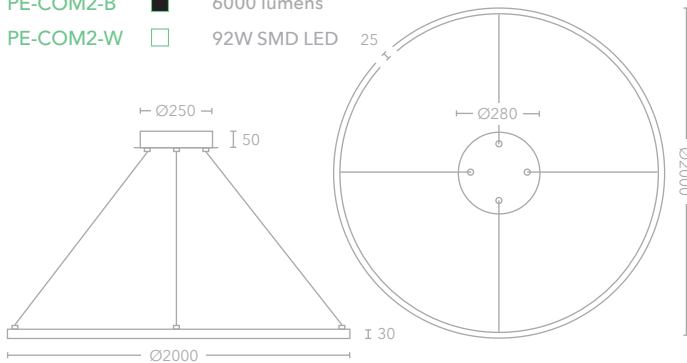

CLASS 1

### Key Features

Sand black or Sand white body /  
Sand white ceiling can / Die cast  
aluminium / Opal acrylic diffuser


3000K / 120° / CRI > 80 / PF 0.95

Non-dimmable

Height adjustable, min. 90cm,  
max. 3m drop



PE-ORB120-B

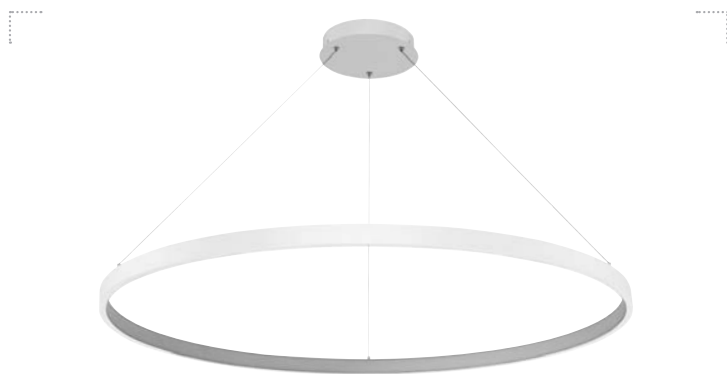


PE-ORB120-W



Illuminated inside ring

## orbit 120

- PE-ORB120-B ■ 3300 lumens  
 PE-ORB120-W □ 60W SMD LED

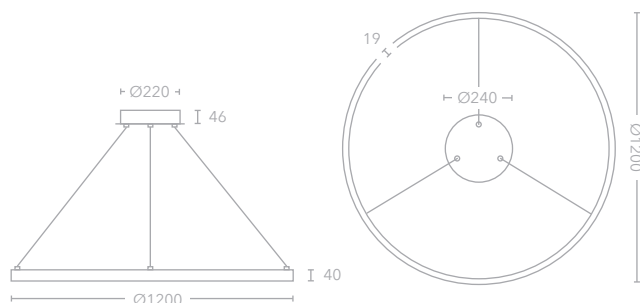

CLASS 1



DIMMABLE

### Key Features


- Sand black or Sand white body / Sand white ceiling can / Die cast aluminium / Opal silicone diffuser
- 3000K / 120° / CRI > 80 / PF 0.95
- Mains dimmable
- Height adjustable, min. 60cm, max. 2m drop



PE-ETE78-B

## eternity 78 pendant

PE-ETE78  PE-ETE78-B   
 80W SMD LED 80W SMD LED  
 4700 lumens 3900 lumens

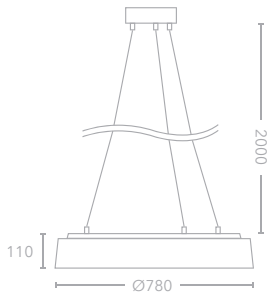

PE-ETE78



CLASS 1



DIMMABLE

### Key Features

Sand white or Black body / Sand white ceiling can / Opal PC diffuser

3000K

Beam Angle: 120°

Power factor 0.95

CRI >80

Mains dimmable



PE-ETE55-B



FL-ETE55




PE-ETE55



FL-ETE55


## eternity 55 pendant

PE-ETE55  PE-ETE55-B   
 40W SMD LED 40W SMD LED  
 3300 lumens 2400 lumens

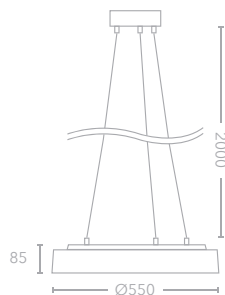

## eternity 55 flush

FL-ETE55   
 40W SMD LED  
 2020 lumens

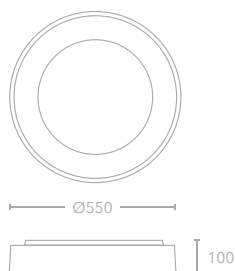

CLASS 1



DIMMABLE

### Key Features

Sand white or Black body /  
Opal PC diffuser

3000K


Beam Angle: 120°

Power factor 0.95

CRI >80


Mains dimmable

NEW

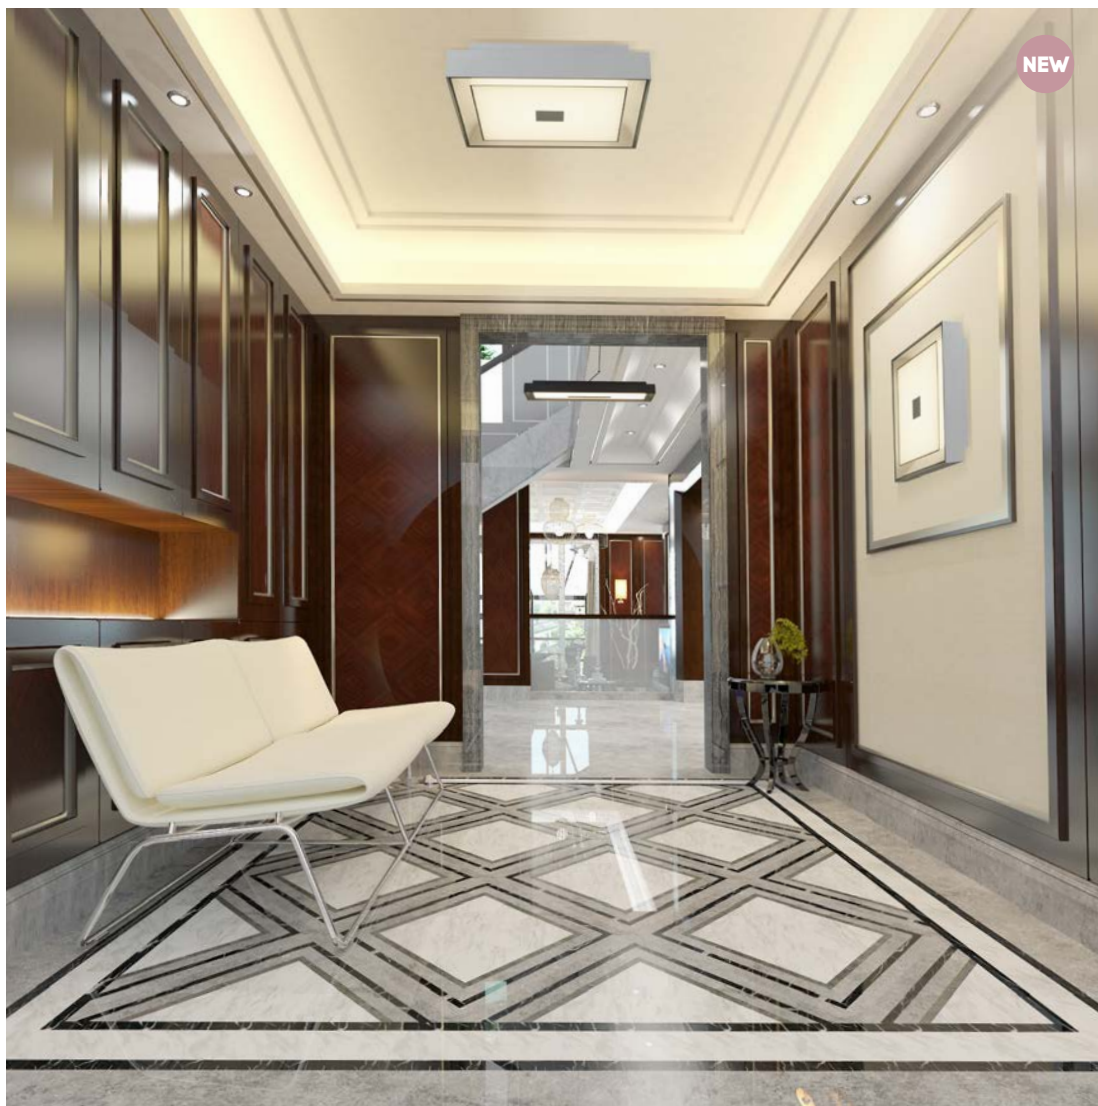

### hepburn square pendant & flush


CE-HEPS43-B ■  
 CE-HEPS43-W □  
 25W SMD LED  
 1400 lumens

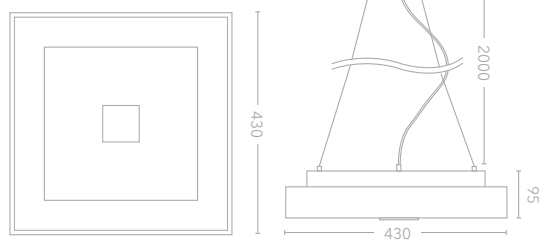

NEW

### hepburn round pendant & flush


CE-HEPR40-B ■  
 CE-HEPR40-W □  
 25W SMD LED  
 1300 lumens

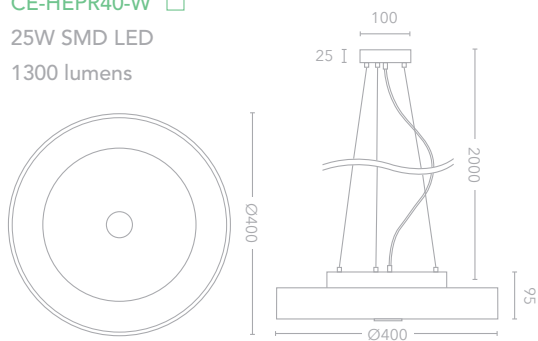

NEW



NEW

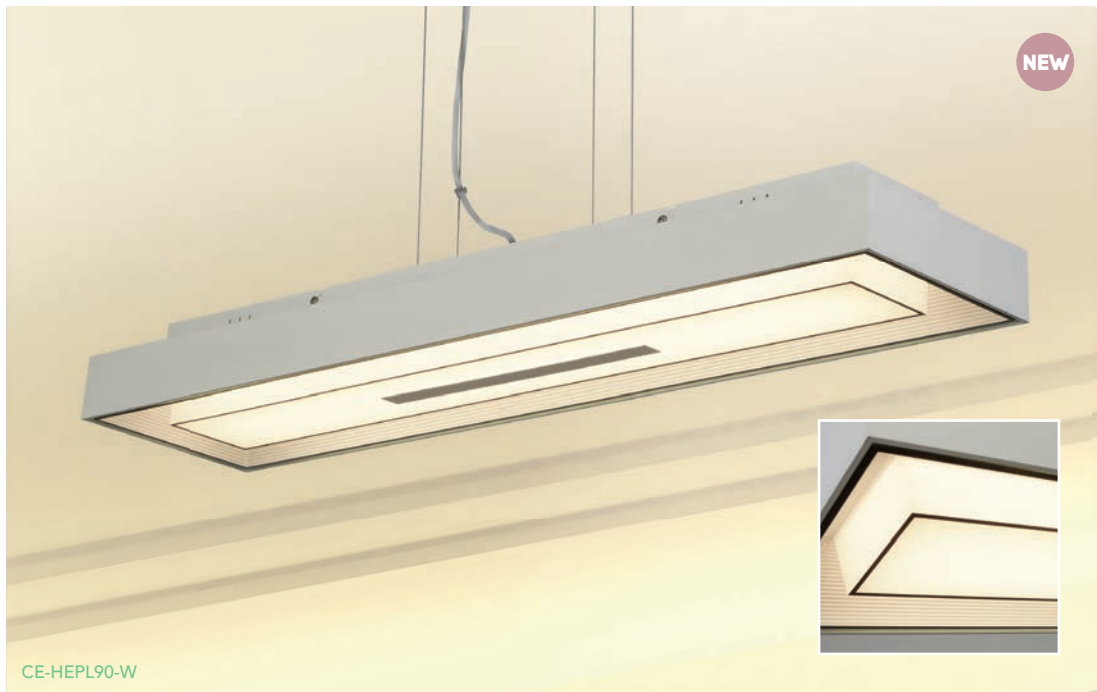

CE-HEPL90-W




CE-HEPS43-W



CE-HEPR40-B

## hepburn long pendant & flush

- CE-HEPL90-B ■
- CE-HEPL90-W □
- 25W SMD LED
- 1300 lumens

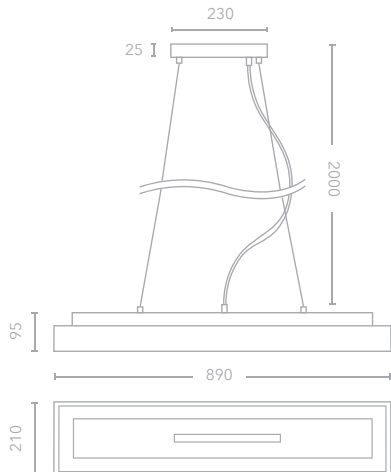

NEW



CLASS 1



DIMMABLE



GLASS

### Key Features

Sand white / Sand black  
Steel and glass

3000K

Mains dimmable

Power factor 0.9

Supplied as a surface mounted item, with 2m pendant adapter included in the box




PE-CLIP



PE-CLIP

## clip pendant

PE-CLIP   
 40W SMD LED  
 2630 lumens

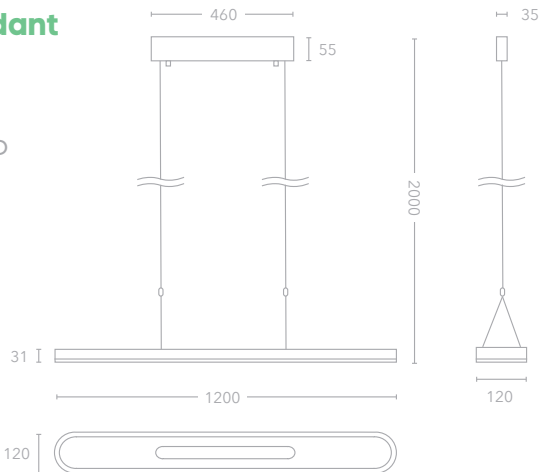

CLASS 1



DIMMABLE

### Key Features

- Sand white
- Frosted acrylic diffuser
- 3000K
- Mains dimmable
- Height adjustable
- CRI >80
- Power factor 0.98

NEW



CE-LINO-B




10% light up from pendant

CE-LINO-W

## lino pendant / flush

NEW

- CE-LINO-B ■
- CE-LINO-W □
- 30W SMD LED
- 2800 lumens

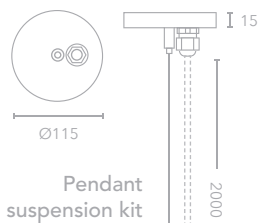

CLASS 1

### Key Features

Sand white / Sand black

Opal PC diffuser

3000K

Pendant drop max 2m

CRI >80

Power factor 0.98

Flush mounting kit included in the box






## athena pendant

PE-ATH-B



PE-ATH-W

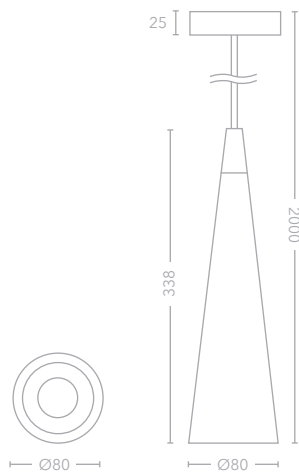

CLASS 1



DIMMABLE



TRACK  
ADAPTER

### Key Features

Sand white / Sand black

Steel

GU10 LED only / Max 10W

Height adjustable



Compatible with  
Pendant Track Adapter




### artemis pendant

PE-ART-B



PE-ART-W




### apollo pendant

PE-APO-B



PE-APO-W

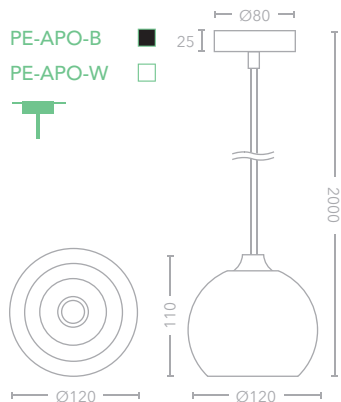

CLASS 1



DIMMABLE



TRACK ADAPTER

#### Key Features

Sand white / Sand black

Steel

GU10 LED only / Max 10W

Height adjustable



Compatible with  
Pendant Track Adapter




CE-HONSQ2B

## honos square twin

CE-HONSQ2B ■ 2 x GU10

CE-HONSQ2W □

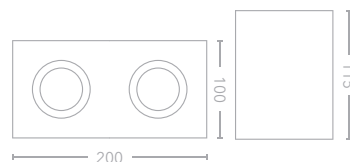



CE-HONRW



CE-AND-W



CE-HONSQW



CE-AND-B



CE-HONRB



CE-HONSQB

### honos round

CE-HONRB ■  
CE-HONRW □  
1 x GU10

### honos square

CE-HONSQB ■  
CE-HONSQW □  
1 x GU10

### andromeda ceiling

CE-AND-B ■  
CE-AND-W □  
1 x GU10

TR-AND  
track version  
available.

NEW



DIMMABLE

#### Key Features


- Steel / Sand painted finish
- GU10 LED only, max. 10W each
- Anti glare

#### Honos

Class II / 20° Tilt, 360° Rotation

#### Andromeda

Class I / 90° Pivot, 350° Rotation

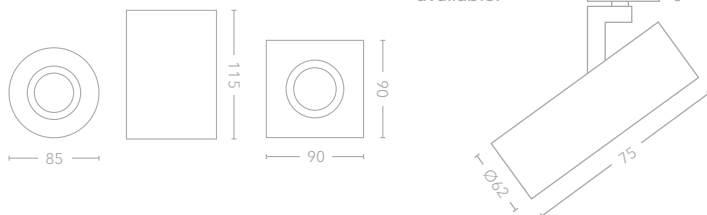

NEW




## orcus

CE-ORC40-B □

23W SMD LED

1900 lumens

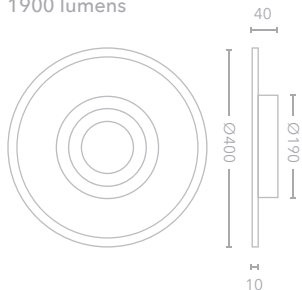

NEW



CLASS 1



DIMMABLE

### Key Features

Acrylic

3000K

Mains dimmable

Power Factor 0.9

Ceiling or wall mounted



NEW



FL-SAT60-W



FL-SAT40-W



FL-SAT40-B

### saturn 60

NEW

- FL-SAT60-B ■ 2900 lumens
  - FL-SAT60-W □ 3700 lumens
- 42W SMD LED

### saturn 40

NEW

- FL-SAT40-B ■ 1800 lumens
  - FL-SAT40-W □ 2500 lumens
- 30W SMD LED





CLASS 1



DIMMABLE

#### Key Features

- Matt Black / Matt White
- Steel and acrylic
- 3000K
- Mains dimmable
- Power Factor 0.9
- Ceiling or wall mounted

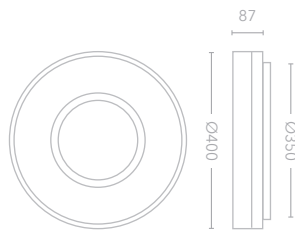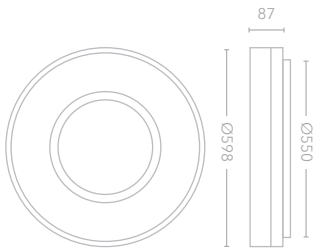

NEW



FL-BAN35-B



FL-BAN35-B



FL-BAN23-B

## banda

NEW



CLASS 2



DIMMABLE



IP 44




GLASS

### FL-BAN35-B ■

23W SMD LED


650 lumens

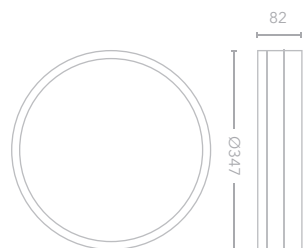

### FL-BAN23-B ■

12W SMD LED

330 lumens

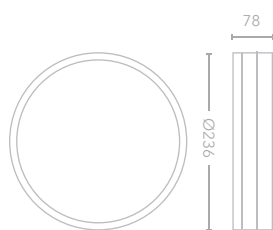

### Key Features

Sand black / Matt white glass

SMD LED 3000K

Ceiling / Wall mounted

Mains dimmable

Power factor 0.9

Bathroom zone 2

NEW



FL-ADM40-W



FL-ADM40-W



FL-ADM30-W

**andaman**

NEW



CLASS 2



DIMMABLE



IP 44



GLASS

**FL-ADM40-W** □

24W SMD LED

1150 lumens

**FL-ADM30-W** □

12W SMD LED

670 lumens

**Key Features**

Matt white glass /  
Clear glass outer shade


SMD LED 3000K

Ceiling / Wall mounted

Mains dimmable

Power factor 0.9


Bathroom zone 2

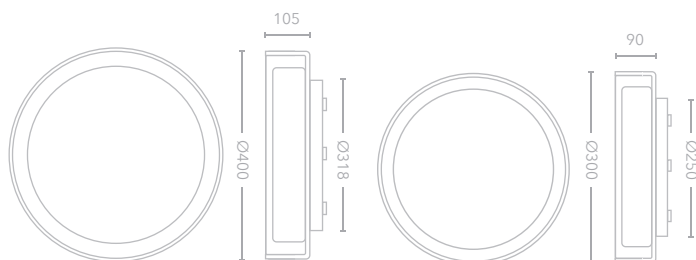




## lyra pendant

PE-LYRAW    
 PE-LYRAB

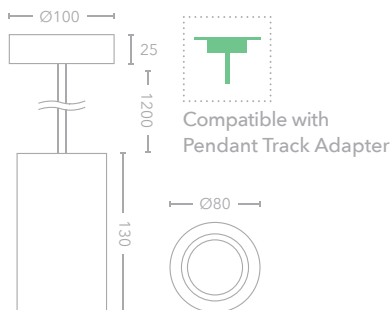

## lyra flush

FL-LYRAW   
 FL-LYRAB

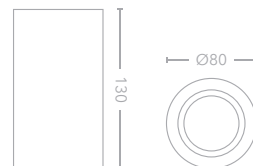

CLASS 1



DIMMABLE



TRACK  
ADAPTER

### Key Features

Sand white / silver interior

Sand black / gold interior

10W 3000K CREE COB LED

Beam angle: 36°

Mains dimmable

Height adjustable (Pendant only)

Lumens: White/silver 930 /  
Black/gold 895

Power factor 0.9



AM-VUL2

AM-VUL4

## vulcan 2ft

AM-VUL2 □

18W SMD LED

1700 lumens



## vulcan 4ft

AM-VUL4 □

36W SMD LED

3000 lumens



CLASS 2

### Key Features

White end caps / Aluminium body /  
Opal Polycarbonate diffuser

3000K

Power factor: 0.9

Ceiling or wall mounted



| Item no.       | Power | CCT   | Lumens | Diameter | Dimmable | Emergency /Sensor  |
|----------------|-------|-------|--------|----------|----------|--------------------|
| AM-CORO12-3    | 12W   | 3000K | 810    | 280mm    | No       | -                  |
| AM-CORO12-4    | 12W   | 4000K | 830    | 280mm    | No       | -                  |
| AM-CORO25-3    | 25W   | 3000K | 1970   | 350mm    | Dimmable | -                  |
| AM-CORO25-3S   | 25W   | 3000K | 1970   | 350mm    | Dimmable | Sensor             |
| AM-CORO25-3EM  | 25W   | 3000K | 1970   | 350mm    | Dimmable | Emergency          |
| AM-CORO25-3EMS | 25W   | 3000K | 1970   | 350mm    | Dimmable | Emergency & sensor |
| AM-CORO60-3    | 60W   | 3000K | 4900   | 480mm    | Dimmable | -                  |
| AM-CORO60-3S   | 60W   | 3000K | 4900   | 480mm    | Dimmable | Sensor             |
| AM-CORO60-3EM  | 60W   | 3000K | 4900   | 480mm    | Dimmable | Emergency          |
| AM-CORO60-3EMS | 60W   | 3000K | 4900   | 480mm    | Dimmable | Emergency & sensor |
| AM-CORO25-4    | 25W   | 4000K | 2020   | 350mm    | Dimmable | -                  |
| AM-CORO25-4S   | 25W   | 4000K | 2020   | 350mm    | Dimmable | Sensor             |
| AM-CORO25-4EM  | 25W   | 4000K | 2020   | 350mm    | Dimmable | Emergency          |
| AM-CORO25-4EMS | 25W   | 4000K | 2020   | 350mm    | Dimmable | Emergency & sensor |
| AM-CORO60-4    | 60W   | 4000K | 5070   | 480mm    | Dimmable | -                  |
| AM-CORO60-4S   | 60W   | 4000K | 5070   | 480mm    | Dimmable | Sensor             |
| AM-CORO60-4EM  | 60W   | 4000K | 5070   | 480mm    | Dimmable | Emergency          |
| AM-CORO60-4EMS | 60W   | 4000K | 5070   | 480mm    | Dimmable | Emergency & sensor |

**Microwave motion sensor**

- 30° - 150° detection angle
- 1 - 5m adjustable detection range
- 5s - 25min adjustable time setting
- 2 - 30 lux adjustable daylight threshold (can be disabled)

**Emergency**

- Maintained emergency function
- 3 hour emergency function
- Green indicator light

**corona 12**

AM-CORO12...  
12W SMD LED

**corona 25**

AM-CORO25...  
25W SMD LED

**corona 60**

AM-CORO60...  
60W SMD LED



CLASS 1



IP 44



DIMMABLE



SENSOR



EMERGENCY

**Key Features**

White painted steel /  
Opal Polycarbonate diffuser

Power factor: 0.9

Bathroom zone 2

Ceiling or wall mounted


Mains dimmable where applicable



### blob pendant large

PE-BLOBL


GLS lamp shape  
Class II

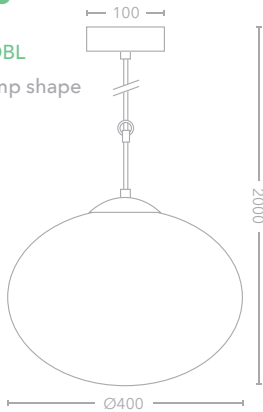

### blob pendant medium

PE-BLOBM


GLS lamp shape  
Class II

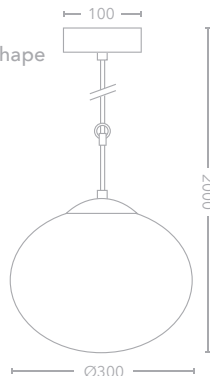

### blob pendant small

PE-BLOBS

GLS lamp shape  
Class II









### blob flush medium

FL-BLOBM  
Class I

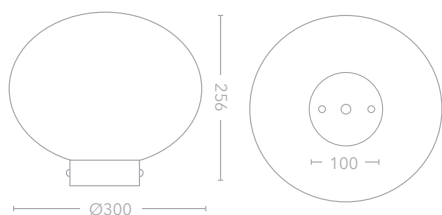

### blob flush small

FL-BLOBS  
Class I



#### Key Features

Polished chrome metalwork /  
Matt white glass

E27 Lampholder / 20W Max

LED only

The glass is handmade and there will always be very small variations between each piece



Compatible with  
Pendant Track Adapter




SH-SF3-SN

SH-P3-SN


**E27 3 light  
semi flush**

SH-SF3-SN ■

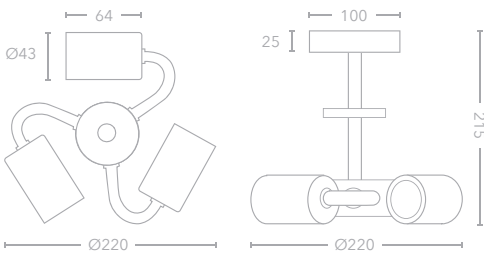

**E27 3 light  
suspension**


SH-P3-SN ■

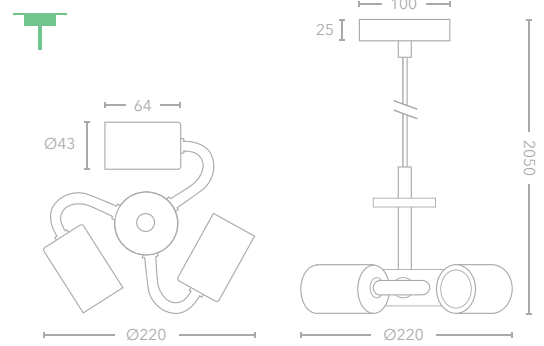



## E27 suspension

SH-P1-SN ■

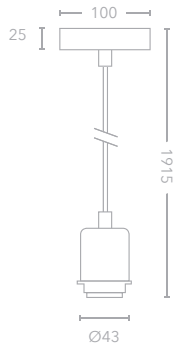

Compatible with  
Pendant Track Adapter



CLASS 1



DIMMABLE



TRACK  
ADAPTER

### Key Features

E27 20W Max

1.8m Clear cable

LED only / 220-240V

IP20

Height adjustable

Suitable for:

Drum 30, Drum 40 & Drum 58 shades.

Shades available in colours:

Grey seal / Coconut / Mushroom





Wall

NEW



WL-SLO2-W

## sloane 2

NEW

WL-SLO2-B ■ 500 lumens

WL-SLO2-W □ 525 lumens



CLASS 1



DIMMABLE

### Key Features


Sand Black / Sand White

Die cast steel body

6W LED

3000K

Power factor 0.9

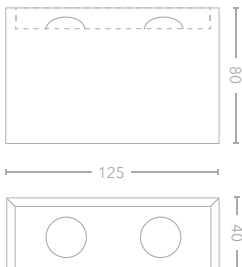

WL-SLO2-B



WL-SLO1-B



WL-SLO1-B




WL-SLO1-W

## sloane 1

WL-SLO1-B ■ 260 lumens

WL-SLO1-W □ 280 lumens

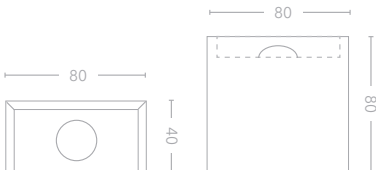

NEW



CLASS 1



DIMMABLE

### Key Features

Sand Black / Sand White

Die cast steel body

4W LED

3000K

Power factor 0.9

NEW



WL-SOU24-B



WL-SOU24-W

NEW




WL-SHO20-B



WL-SHO20-W



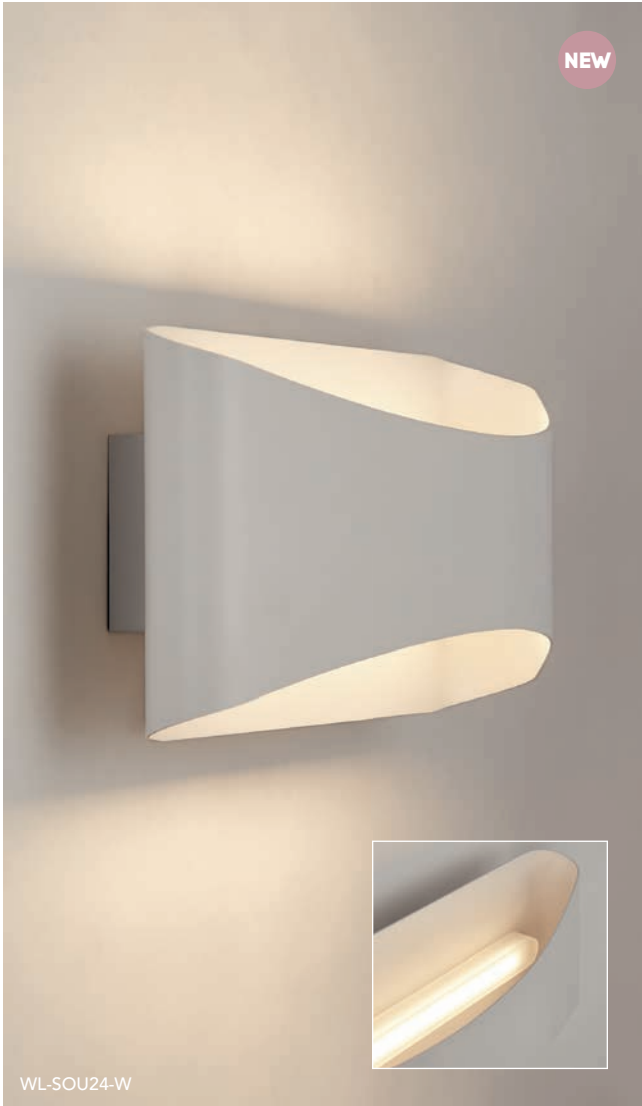

WL-SOU24-W



WL-SOU24-B



WL-SHO20-W



WL-SHO20-B

southwark


NEW

- WL-SOU24-B ■ 350 lumens
- WL-SOU24-W □ 720 lumens

shoreditch

NEW

- WL-SHO20-B ■ 580 lumens
- WL-SHO20-W □ 1040 lumens

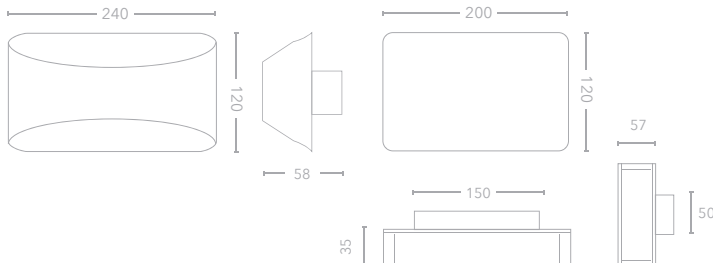


CLASS 1



DIMMABLE


Key Features

- Sand White / Sand Black
- Die cast aluminium / Acrylic
- SMD LED
- 3000K
- Power factor 0.9
- Southwark 11W
- Shoreditch 17W

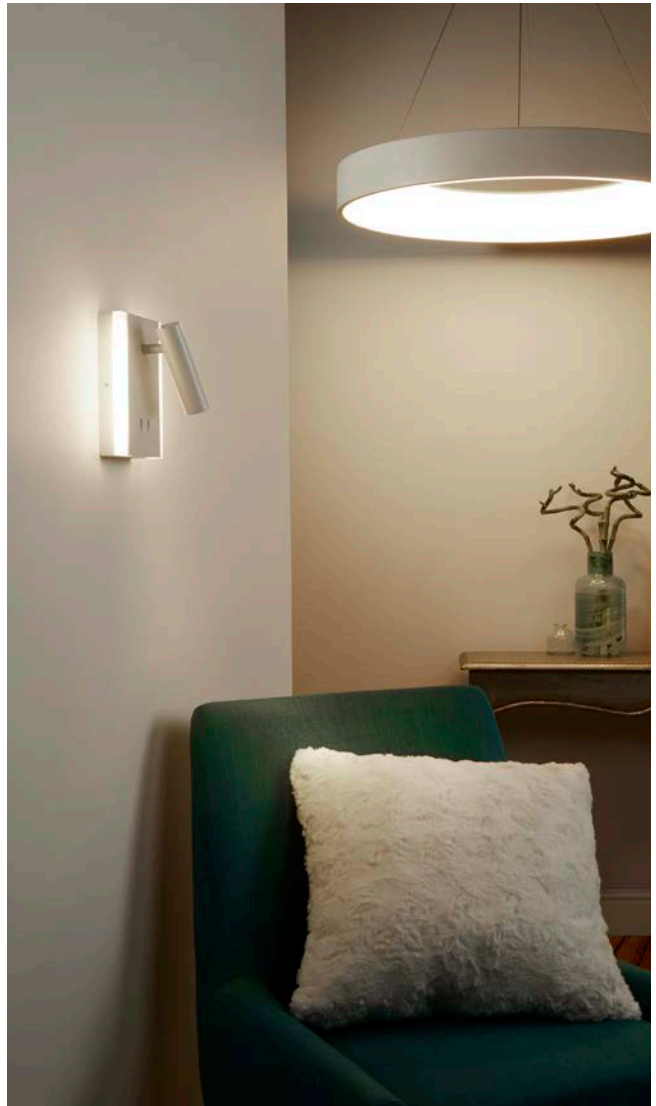

## ice

- WL-ICE-B ■
- WL-ICE-W □

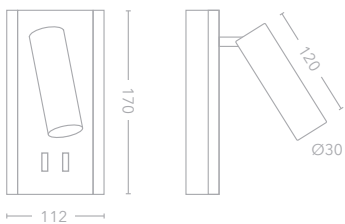

NEW



CLASS 1



SWITCH

### Key Features

Sand White / Steel

8.5W SMD LED + 3W Power LED

3000K

Backlight / 280 lumens

Reading light / 170 lumens

Reading light pivots and rotates

Dual switching

Power factor 0.65



WL-HALK



WL-HALKB





WL-HALK

## halkin

WL-HALKB  
230 lumens



WL-HALK  
450 lumens

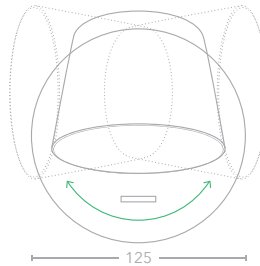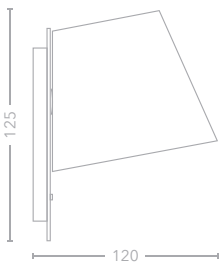

CLASS 1



SWITCH

### Key Features

Sand white or black /  
Die cast aluminum

6W Edison SMD LED

3000K

350° Rotation

Power factor 0.5






WL-LB10



WL-LB20



WL-LB38

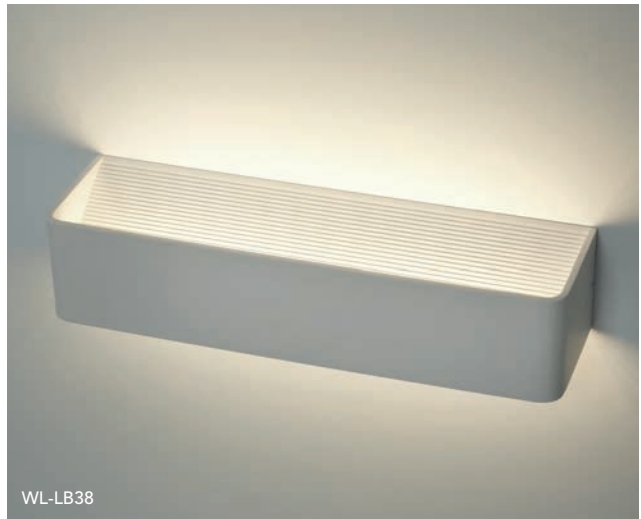

WL-LB38



WL-LB20

## london bridge


WL-LB10   
 6W EDISON COB  
 450 lumens

WL-LB20   
 6W EDISON SMD LED  
 570 lumens


WL-LB38   
 12W EDISON SMD LED  
 1030 lumens



100



200



370


100



80



80



80



CLASS 1

### Key Features


Sand white /  
 Die cast aluminium

Integrated LED


3000K

Can be fitted vertically  
 or horizontally



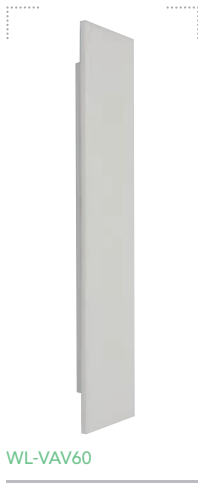


WL-VAV60

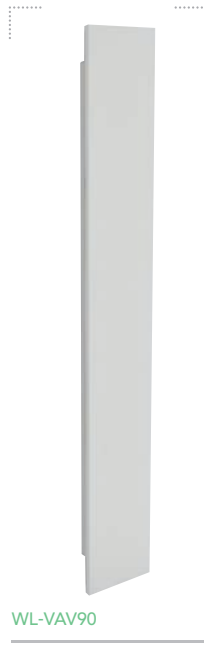

WL-VAV90



WL-VAV120

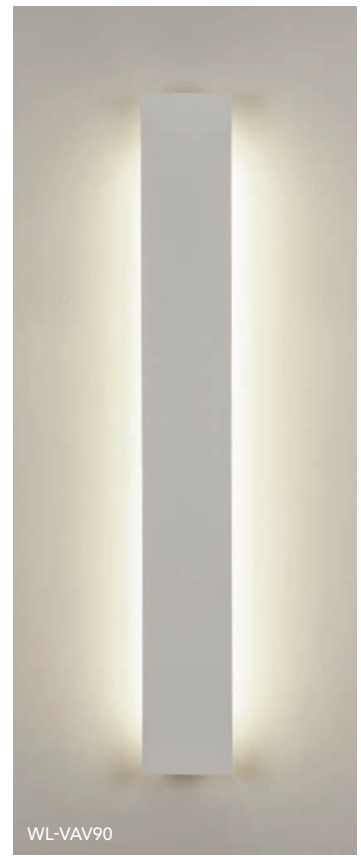

WL-VAV90

### vavin 60

WL-VAV60   
 12W SMD LED  
 570 lumens



### vavin 90

WL-VAV90   
 20W SMD LED  
 860 lumens



### vavin 120

WL-VAV120   
 30W SMD LED  
 1220 lumens



CLASS 2



DIMMABLE

#### Key Features


Sand white

Steel

3000K

220-240V

Can be fitted vertically  
 or horizontally

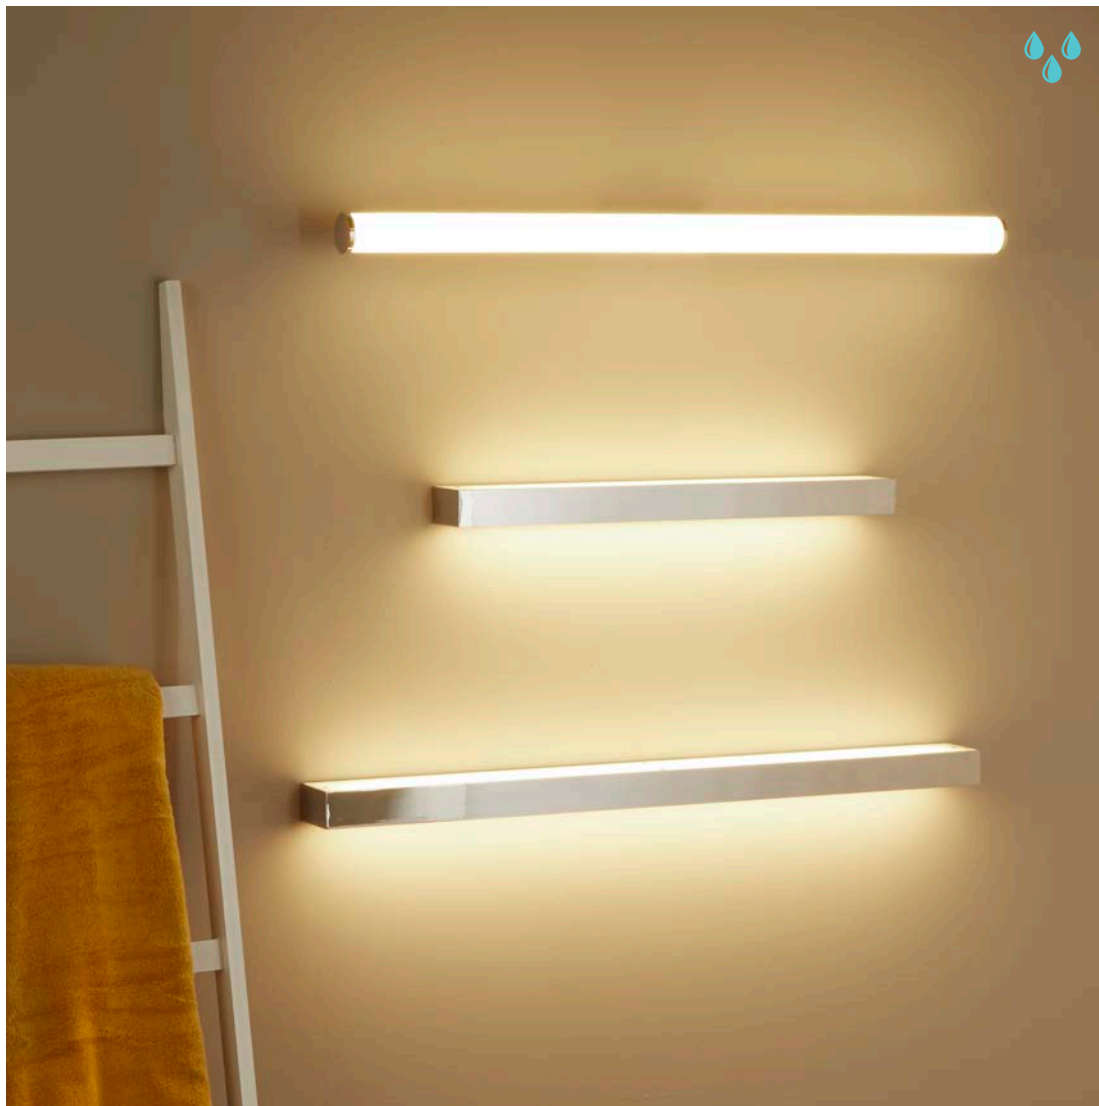

## veritas

BA-VER90   
18W SMD LED  
1570 lumens



CLASS 1




IP  
44

### Key Features


Polished chrome /  
Opal Polycarbonate diffuser  
3000K  
Ceiling or wall mounted  
Bathroom zone 2





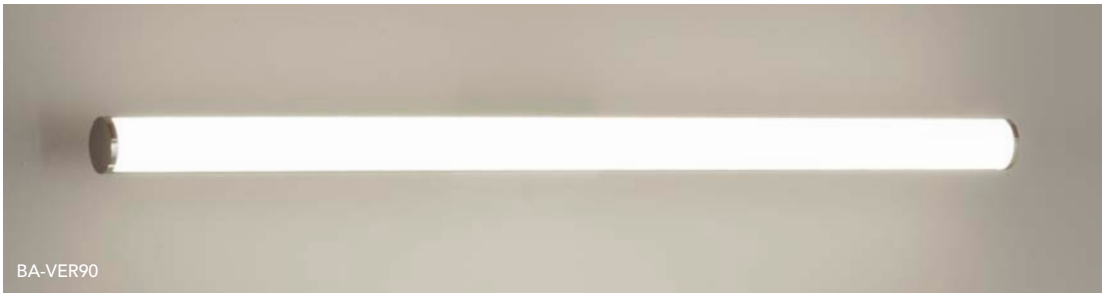

BA-VER90

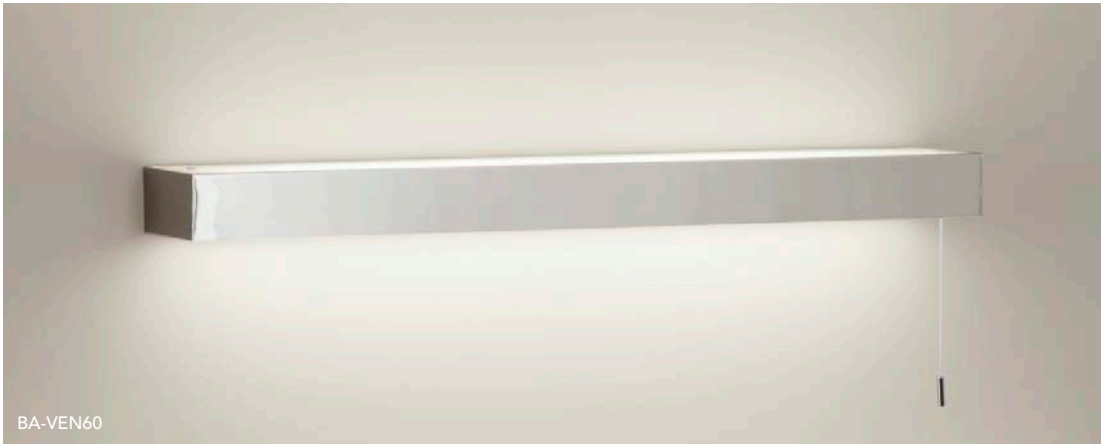

BA-VEN60



BA-VEN90

## venti 60

BA-VEN60   
18W SMD LED  
870 lumens



## venti 90

BA-VEN90   
24W SMD LED  
1080 lumens



CLASS 1

IP  
44

### Key Features

Polished chrome /  
Opal Polycarbonate / Frosted

3000K

Removable pull cord

Can be fitted vertically  
or horizontally

Bathroom zone 2





WL-TU16



WL-OV25



WL-TU16



WL-OV25

**tube 16**

WL-TU16

**ovo 25**

WL-OV25



CLASS 2



DIMMABLE





GLASS


**Key Features**


Polished Chrome / Matt white glass

E14 LED only / Max 20W

Golf ball shape lamp required

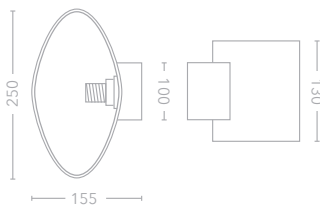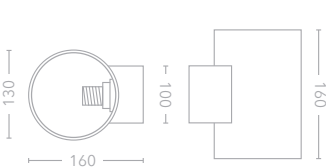

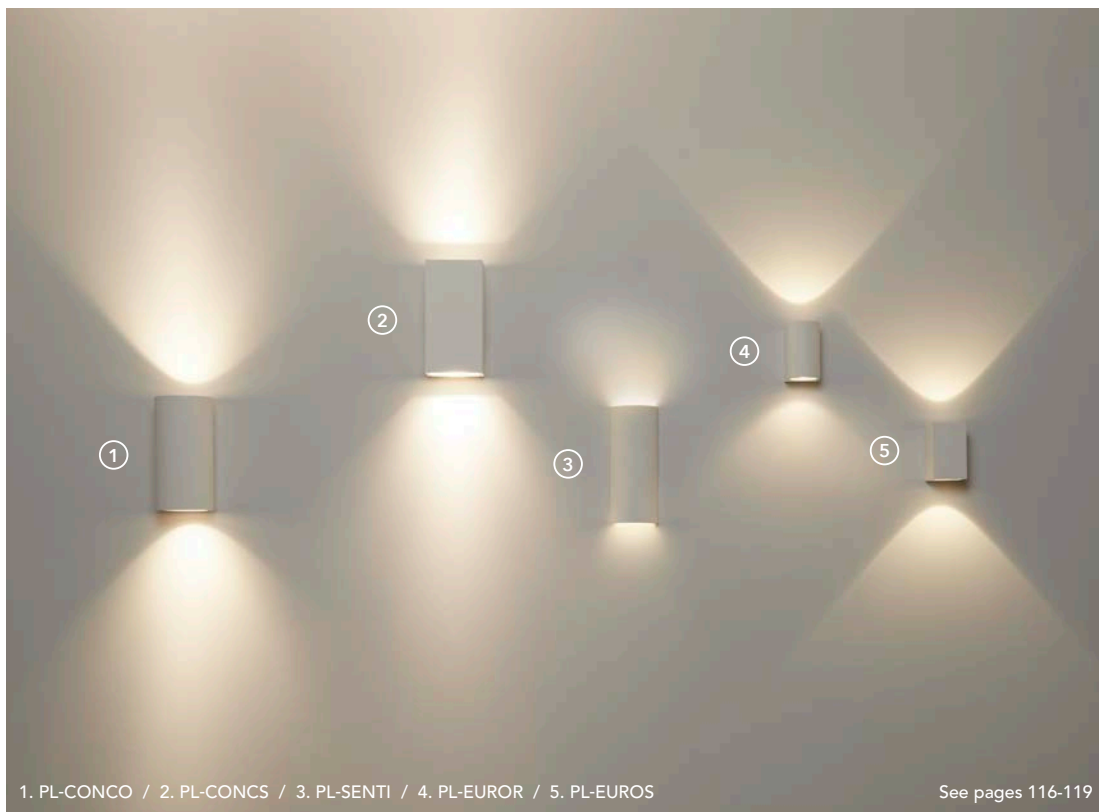


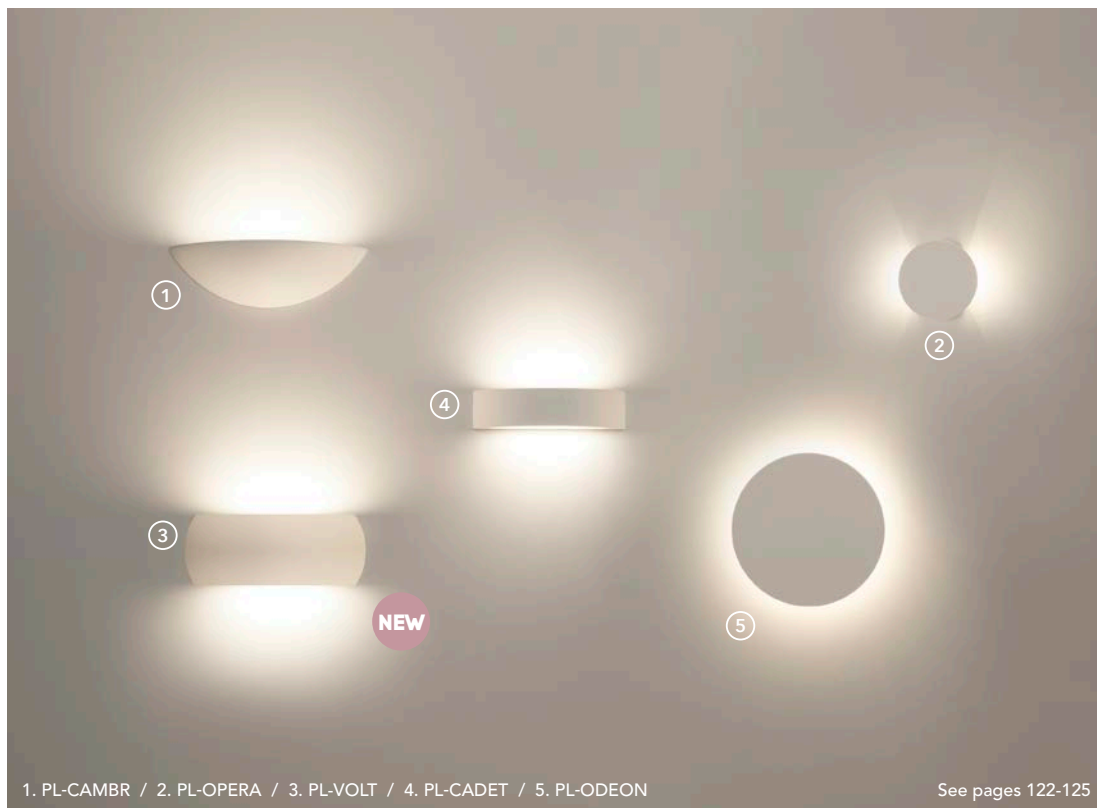

## how to paint


All our plaster items are paintable. Follow these steps to achieve the best finish.

- seal the plaster with a PVA sealer (1 part PVA to 1 part water). allow to dry thoroughly
- paint with a soft brush. allow to dry
- lightly sand
- apply a second coat of paint with a soft brush
- this symbol represents a white plaster finish

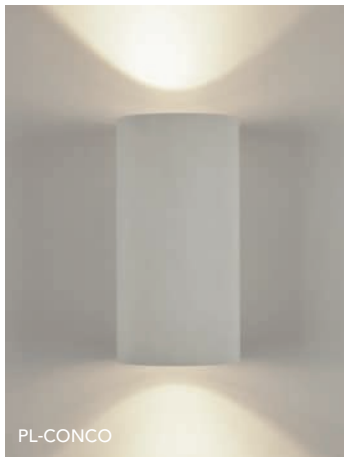


## concorde round

PL-CONCO 

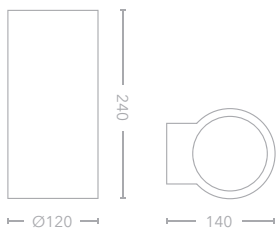

## concorde square

PL-CONCS 



CLASS 2



DIMMABLE



PAINTABLE


### Key Features

White plaster

2 x GU10 Lampholder


LED only / Max 10W each

220-240V

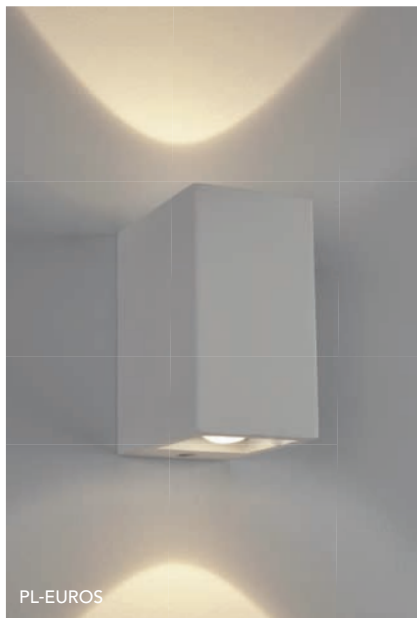


**europa round**

PL-EUROR 

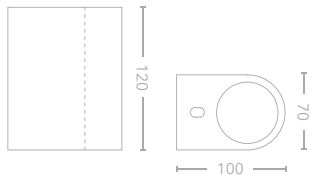

**europa square**

PL-EUROS 

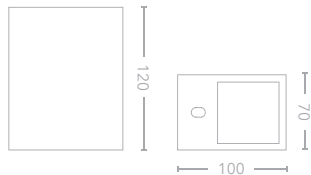

CLASS 2



PAINTABLE

**Key Features**

White plaster

2 x 3W CREE LED


450 lumens

3000K

220-240V





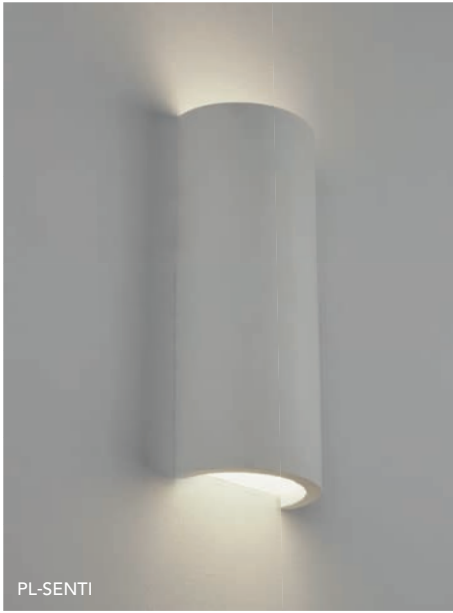


PL-SENTI



PL-MIRAB



PL-MONCE

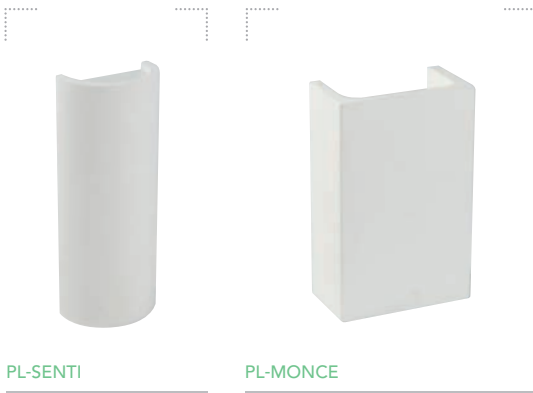


PL-SENTI

PL-MONCE

## sentier

PL-SENTI


2 x 1.5W Power LED  
245 lumens

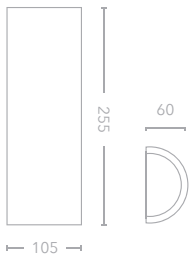

## mirabeau

PL-MIRAB


2 x 3W CREE LED  
410 lumens



## monceau

PL-MONCE

2 x 3W CREE LED  
510 lumens



PAINTABLE

### Key Features

White plaster

3000K

Mirabeau & Monceau (Class I)

Sentier (Class II)

220-240V



PL-MABIL




PL-MABIL

## mabillon

PL-MABIL 

570 lumens



CLASS 1



PAINTABLE

### Key Features

White plaster

5W CREE LED

3000K

220-240V



PL-AVRON




PL-AVRON

## avron

PL-AVRON 

600 lumens



CLASS 2



PAINTABLE

### Key Features

White plaster

6.5W SMD LED

3000K

220-240V





PL-CADET



PL-VOLT




PL-CADET



PL-VOLT


cadet

PL-CADET   
 6.5W SMD LED  
 550 lumens



voltaire

PL-VOLT   
 E27 20W Max

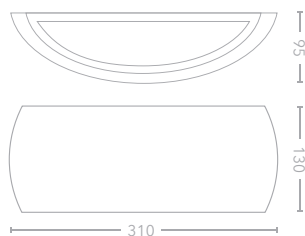

NEW



CLASS 2



PAINTABLE

Key Features

White plaster

3000K


220-240V



## cambronne

PL-CAMBR 

600 lumens

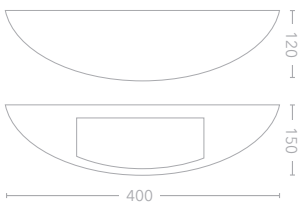

CLASS 2



PAINTABLE

### Key Features

White plaster

10W SMD LED

3000K

220-240V




## odeon

PL-ODEON 

10W SMD LED

620 lumens




## opera

PL-OPERA 

2 x 1.5W LED

175 lumens



CLASS 2



PAINTABLE

### Key Features

White plaster

3000K

220-240V







LED-PROJ1W-B



LED-PROJ1W-W



LED-PROJ1W-SN




Driver:  
Supplied separately



## mini projector

- LED-PROJ1W-B ■
  - LED-PROJ1W-W □
  - LED-PROJ1W-SN ■
- 120 lumens

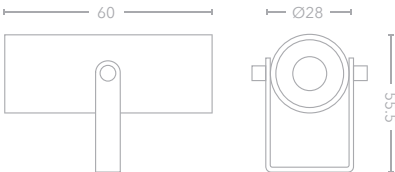

CLASS 3



DIMMABLE



350mA

### Key Features

Aluminium body

1W CREE XPE 3000K

Beam angle: 20°

270° Pivot / 360° Rotation

Driver supplied separately

Fittings must be wired in series


Can be wall, ceiling or floor mounted



SH-US-M



SH-US-C

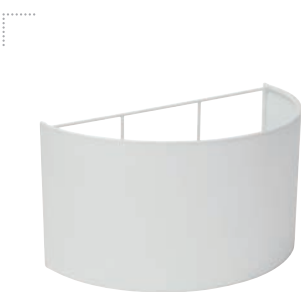

SH-UD-C




SH-UD-M



SH-UWB


**universal half drum**

- SH-UD-C ■
- SH-UD-M ■




**universal half square**

- SH-US-C ■
- SH-US-M ■



**SH-UWB**

Universal wall bracket  
Class I / Switch  
Dimmable





SH-UWB

+ SH-UR-C



SH-UR-M



SH-UR-C




SH-UC-C



SH-UC-M


### universal half cylinder

- SH-UC-C ■
- SH-UC-M ■



### universal half rectangle

- SH-UR-C ■
- SH-UR-M ■

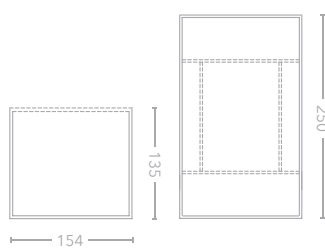

CLASS 1



SWITCH



DIMMABLE

#### Key Features

Polycotton shade / PVC lining

For use with SH-UWB only  
Universal shade wall bracket  
sold separately

E27 20W Max

LED only

To Order: SH-UWB + SH-UC- Colour e.g. SH-UWB + SH-UC-C



SH-WBPIM-AB



SH-WBPIM-MB



SH-WBPIM-SN




SH-WBPIM-CP



Shades:  
Supplied separately  
See pages 150-155

## pimlico

- SH-WBPIM-AB ■
- SH-WBPIM-CP ▨
- SH-WBPIM-SN ■
- SH-WBPIM-MB ■

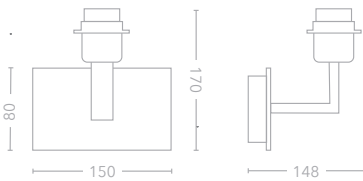

CLASS 1



SWITCH

### Key Features

Steel

E27 GLS LED max 20W

LED only



SH-WBPIMR-CP



SH-WBPIMR-SN



SH-WBPIMR-MB




SH-WBPIMR-SN



Shades:  
Supplied separately  
See pages 150-155

## pimlico reader

- SH-WBPIMR-AB ■
- SH-WBPIMR-CP ■
- SH-WBPIMR-SN ■
- SH-WBPIMR-MB ■

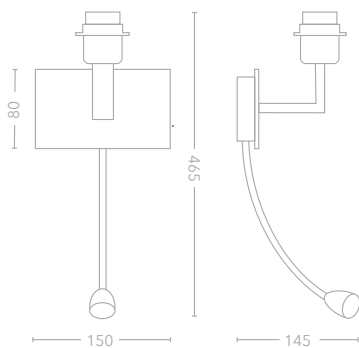

CLASS 1



SWITCH

### Key Features

Steel

E27 GLS LED max 20W

LED only

### Reading Arm

1W 3000K LED / 90 lumens

30° Beam angle

Replaceable LED Module MOD1W

Dual switching




SH-WBPIMP-CP



SH-WBPIMP-AB



SH-WBPIMP-SN

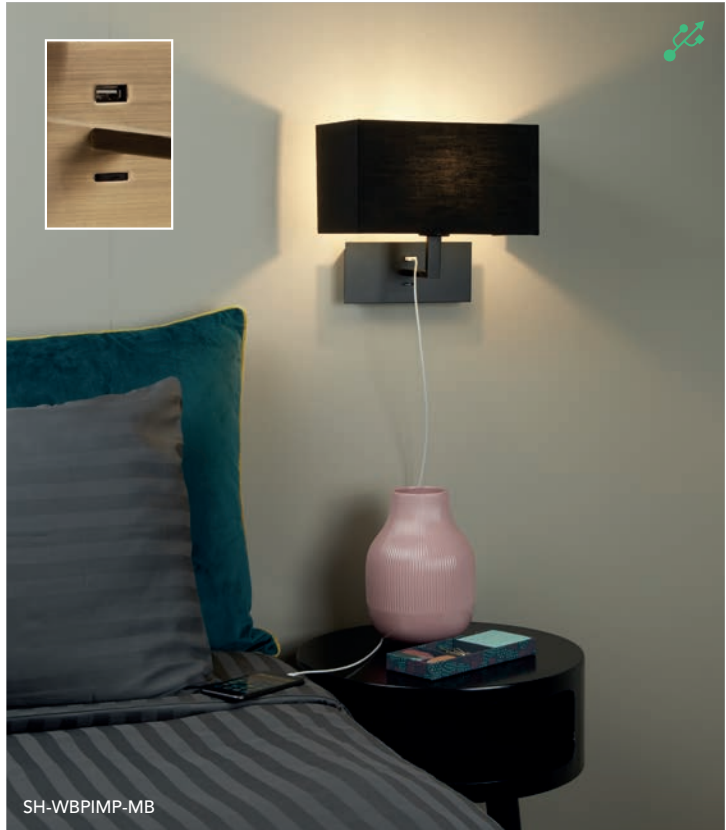






SH-WBPIMP-MB



Shades:  
Supplied separately  
See pages 150-155

## pimlico plus

- SH-WBPIMP-AB 
- SH-WBPIMP-CP 
- SH-WBPIMP-SN 
- SH-WBPIMP-MB 

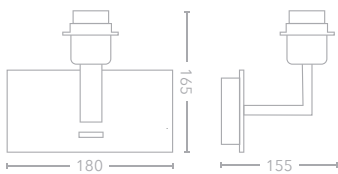

-  CLASS 1
-  SWITCH
-  USB

### Key Features

- Steel
- E27 GLS LED max 20W
- LED only
- Switches on the front plate



SH-WBPIMPR-CP



SH-WBPIMPR-AB



SH-WBPIMPR-MB




SH-WBPIMPR-SN



Shades:  
Supplied separately  
See pages 150-155

## pimlico plus reader

- SH-WBPIMPR-AB
- SH-WBPIMPR-CP
- SH-WBPIMPR-SN
- SH-WBPIMPR-MB

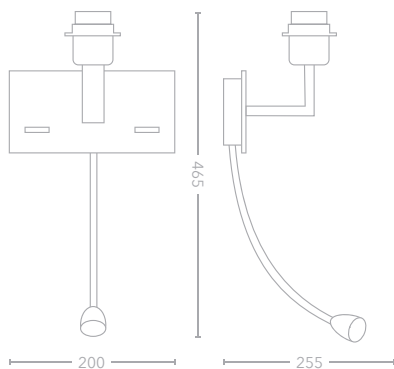

-   
CLASS 1
-   
SWITCH
-   
USB

### Key Features

- Steel
- E27 GLS LED max 20W
- LED only
- Switches on the front plate

### Reading Arm

- 1W 3000K LED / 90 lumens
- 30° Beam angle
- Replaceable LED Module MOD1W
- Dual switching



SH-WBFEN-SN




SH-WBFEN-SN



Shades:  
Supplied separately  
See pages 150-155

## fenchurch

SH-WBFEN-SN

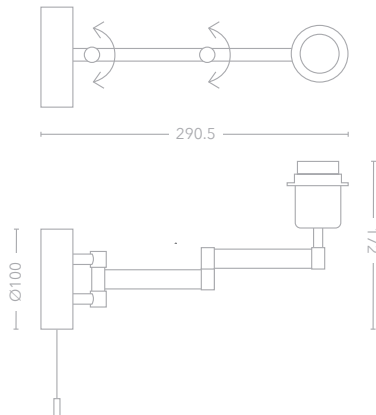

CLASS 2



SWITCH



DIMMABLE

### Key Features

Steel

Double articulated arm

E27 LED max 20W

Removable pull cord switch

Recommended shades

SHDR15 & SH-CO, see page 152





SH-WBVIC-AB



SH-WBVIC-MB



SH-WBVICR-SN




SH-WBVIC-SN



Shades:  
Supplied separately  
See pages 150-155


## victoria

- SH-WBVIC-AB ■
- SH-WBVIC-SN ■
- SH-WBVIC-MB ■

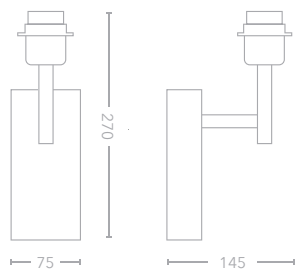

## victoria reader

- SH-WBVICR-AB ■
- SH-WBVICR-SN ■
- SH-WBVICR-MB ■

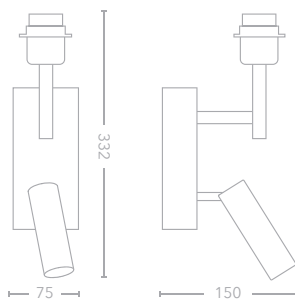

CLASS 1



SWITCH

### Key Features

Steel

E27 GLS LED max 20W

LED only

### Reading Arm

1W 3000K LED

90 lumens

30° Beam Angle

Replaceable LED module MOD1W

Dual switching



SH-VICLED-AB



SH-VICLED-SN




SH-VICLED-CP



SH-VICLED-MB

## victoria LED

- SH-VICLED-AB
- SH-VICLED-SN
- SH-VICLED-MB
- SH-VICLED-CP

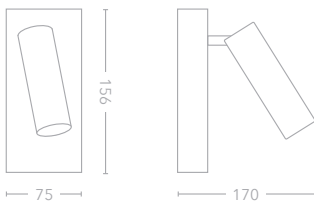

CLASS 1



SWITCH

### Key Features

Steel

Adjustable / Pivoting reading light

1W CREE XPE LED

3000K

90 lumens

30° Beam angle

Replaceable LED module MOD1W



SH-VICLEDR-AB



SH-VICLEDR-MB




SH-VICLEDR-SN



SH-VICLEDR-SN

## victoria LED recessed

- SH-VICLEDR-AB
- SH-VICLEDR-SN
- SH-VICLEDR-MB

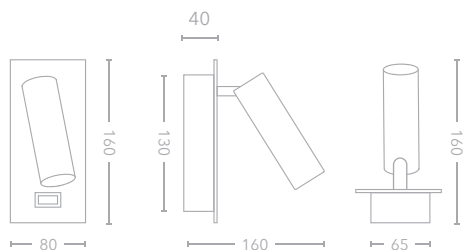

CLASS 1



SWITCH



USB



CUT OUT  
67x132mm

### Key Features

Steel

Adjustable / Pivoting reading light

1W CREE XPE LED

USB Charger

3000K / 90 lumens

30° Beam angle

Replaceable LED module MOD1W





WL-CHER-AB




WL-CHE-AB




### chelsea recessed

- WL-CHER-AB ■
- WL-CHER-SN ■

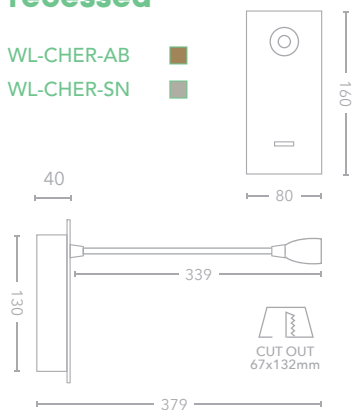

### chelsea

- WL-CHE-AB ■
- WL-CHE-SN ■

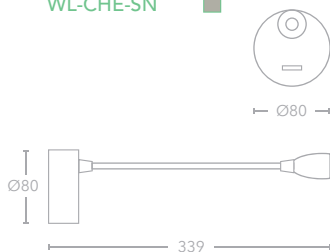

CLASS 1



SWITCH

#### Key Features

Steel

Adjustable / Pivoting reading light

1W CREE XPE LED

3000K

90 lumens

30° Beam angle

Replaceable LED module MOD1W



# table & floor









TA-LIB-B




FS-LIB-W



TA-LIB-W


### libra table

- TA-LIB-B
- TA-LIB-W

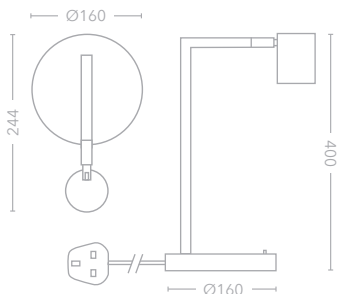

### libra floor

- FS-LIB-B
- FS-LIB-W

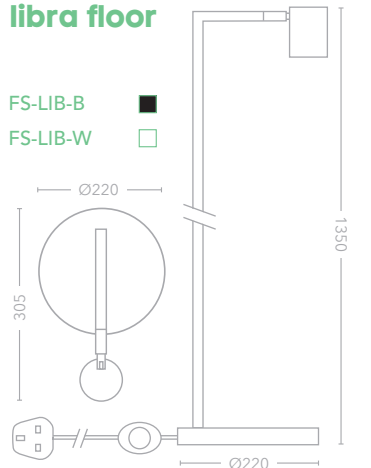

#### Key Features

- Sand black / Sand white
- Die cast construction
- GU10 max. 10W LED only
- Linear switch on base of table lamp
- Inline switch on cable of floor lamp

For European plug use code  
 EUTA-LIB.\*\*  
 EUFS-LIB.\*\*





TA-KEN-SN

FS-KEN-SN



FS-KEN-SN  
TA-KEN-SN


SH-RXL-M  
SH-RL-G



Shades:  
Supplied separately  
See pages 150-155

### kensington table


TA-KEN-SN ■

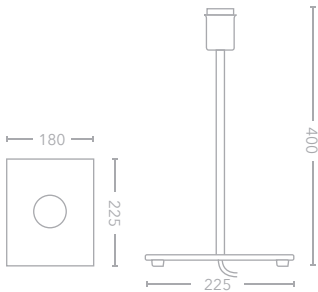

Recommended shade: SH-RL

### kensington floor

FS-KEN-SN ■

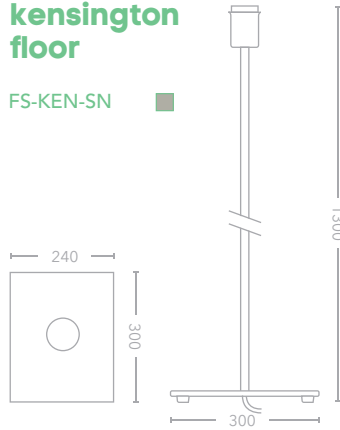

Recommended shade: SH-RXL



### Key Features

- Satin nickel finish
- E27 max. 20W
- LED only
- Inline switch on cable
- Shades supplied separately

For European plug use code  
EUTA-KEN-SN  
EUFS-KEN-SN



TA-OLY-AB-USB

TA-OLY-AB-USB


SH-DR30-M

## olympia table USB

TA-OLY-AB-USB 

TA-OLY-SN-USB 

With USB charging port

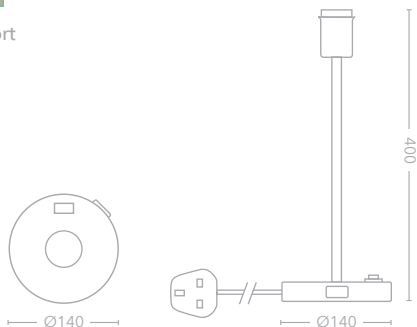

CLASS 2



SWITCH

### Key Features

Antique brass, Satin nickel finishes

E27 max. 20W / LED only

Switch on base


Shades supplied separately

For European plug use code  
EUTA-OLY-\*\*



FS-OLY-SN + SH-DR40-B

SH-DR30-B



Shades:  
Supplied separately  
See pages 150-155




TA-OLY-SN



FS-OLY-AB

### olympia table


- TA-OLY-AB ■
- TA-OLY-SN ■

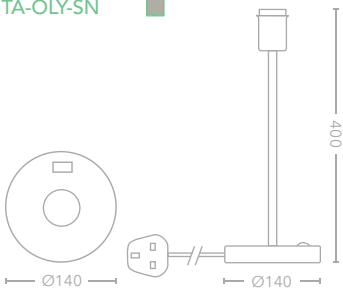

Recommended shade: SH-DR30 / SH-OVM

### olympia floor

- FS-OLY-AB ■
- FS-OLY-SN ■

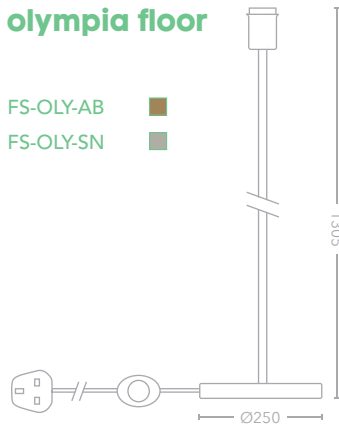

Recommended shade: SH-DR40 / SH-OVL



CLASS 2 SWITCH

#### Key Features

E27 max. 20W / LED only

Floor lamp has inline switch on cable

Table lamp has switch on base

Shades supplied separately

For European plug use code

EUTA-OLY-\*\*


EUFS-OLY-\*\*



# shades



# shades

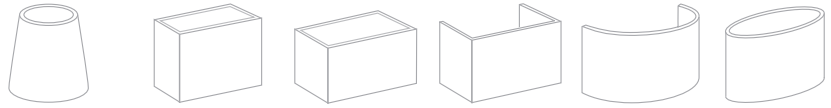




| Colour |                  | Cone    | Small Rectangle | Large Rectangle | Open Square | Open Crescent | Small Oval |
|--------|------------------|---------|-----------------|-----------------|-------------|---------------|------------|
|        | <b>Coconut</b>   | SH-CO-C | SH-RS-C         | SH-RL-C         | SH-SQO-C    | SH-CR-C       | SH-OV-C    |
|        | <b>Mushroom</b>  | SH-CO-M | SH-RS-M         | SH-RL-M         | SH-SQO-M    | SH-CR-M       | SH-OV-M    |
|        | <b>Grey Seal</b> | SH-CO-G | SH-RS-G         | SH-RL-G         | SH-SQO-G    | SH-CR-G       | SH-OV-G    |
|        | <b>Black</b>     | SH-CO-B | SH-RS-B         | SH-RL-B         | SH-SQO-B    | SH-CR-B       | SH-OV-B    |

| Range            | Page no. |   |   |   |   |   |   |
|------------------|----------|---|---|---|---|---|---|
| 1lt Suspension   | 97       |   |   |   |   |   |   |
| 3lt Suspension   | 96       |   |   |   |   |   |   |
| 3lt Semi-flush   | 96       |   |   |   |   |   |   |
| Pimlico          | 130, 131 | ● | ● | ● | ● | ● | ● |
| Pimlico Plus     | 132, 133 | ● | ● | ● | ● | ● | ● |
| Victoria         | 135      | ● | ● | ● | ● | ● | ● |
| Fenchurch        | 136      | ● |   |   |   |   |   |
| Kensington Table | 145      | ● |   | ● |   |   | ● |
| Kensington Floor | 145      |   |   | ● |   |   |   |
| Olympia Table    | 146, 147 | ● |   | ● |   |   | ● |
| Olympia Floor    | 147      |   |   |   |   |   |   |





## Key

- C - Coconut
- M - Mushroom
- G - Grey seal
- B - Black

## Shade material without light source



























## Shade material with 3000K light source







| Medium Oval | Large Oval | X-Large Rectangle | Drum 15   | Drum 30   | Drum 40   | Drum 58   |
|-------------|------------|-------------------|-----------|---|---|---|
| SH-OVM-C    | SH-OVL-C   | SH-RXL-C          | SH-DR15-C | SH-DR30-C   | SH-DR40-C   | SH-DR58-C   |
| SH-OVM-M    | SH-OVL-M   | SH-RXL-M          | SH-DR15-M | SH-DR30-M   | SH-DR40-M   | SH-DR58-M   |
| SH-OVM-G    | SH-OVL-G   | SH-RXL-G          | SH-DR15-G | SH-DR30-G   | SH-DR40-G   | SH-DR58-G   |
| SH-OVM-B    | SH-OVL-B   | SH-RXL-B          | SH-DR15-B | SH-DR30-B  | SH-DR40-B  | SH-DR58-B  |

|   |   |   |   |  |   |  |   |
|---|---|---|---|--|---|--|---|
|   |   |   |   |  |    |   |  |
|   |   |   |   |  |   |   |  |
|   |   |   |   |  |   |   |  |
|   |   |   |  |  |   |  |   |
|   |   |   |  |  |   |  |   |
|   |   |   |  |  |   |  |   |
|   |   |   |  |  |   |  |   |
|    |   |   |   |  |    |  |   |
|  |   |   |   |  |  |  |   |
|   |   |   |   |  |   |  |   |
|   |   |   |   |  |   |  |  |
|   |  |   |   |  |   |  |   |
|   |   |  |   |  |   |  |   |

All the shades in this collection are:

- White PVC lining
- To suit E27/E14/B22 shade ring
- For use with LED lamps only
- Available from stock in the UK
- Flame retardant



**Special colours available**


Minimum order quantities will apply.  
Allow 4 weeks for a sample and  
12 weeks order lead time.

Not all items are stocked in black. Minimum quantity for special orders: 100


## cone



SH-CO-M



- SH-CO-C
- SH-CO-M
- SH-CO-G
- SH-CO-B




## open crescent



SH-CR-C


- SH-CR-C
- SH-CR-M
- SH-CR-G
- SH-CR-B

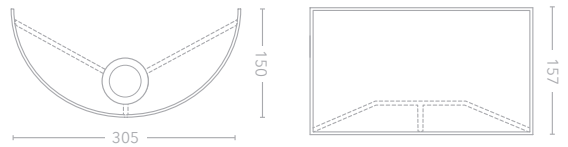


## small oval



SH-OV-G



- SH-OV-C
- SH-OV-M
- SH-OV-G
- SH-OV-B

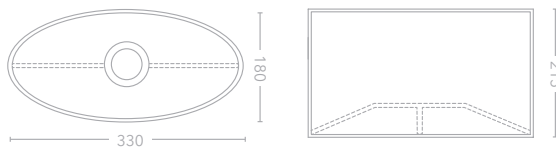


## drum 15



SH-DR15-M



- SH-DR15-C
- SH-DR15-M
- SH-DR15-G
- SH-DR15-B

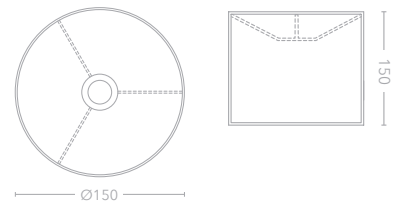

small rectangle





SH-RS-B

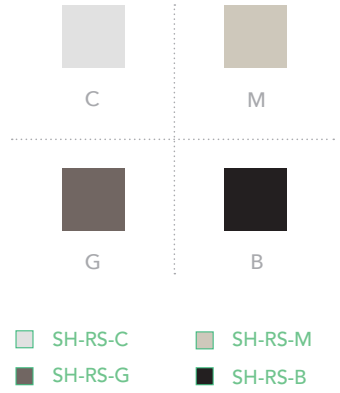

large rectangle





SH-RL-M

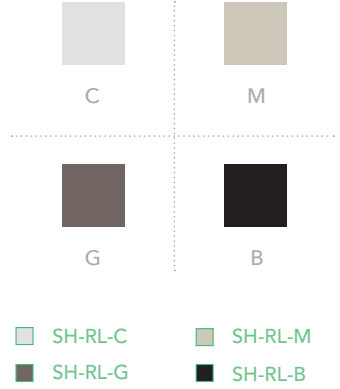

open square




SH-SQO-C

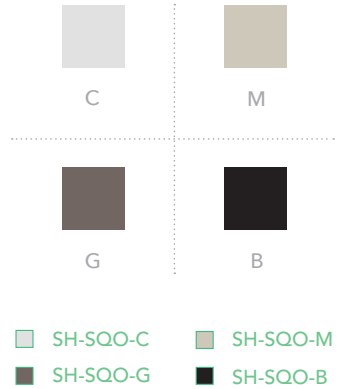

## medium oval



SH-OVM-M



C



M



G



B

SH-OVM-C

SH-OVM-M


SH-OVM-G

SH-OVM-B

## large oval



SH-OVL-C



C



M



G



B

SH-OVL-C

SH-OVL-M


SH-OVL-G

SH-OVL-B

## x-large rectangle



SH-RXL-B



C



M



G



B

SH-RXL-C

SH-RXL-M


SH-RXL-G

SH-RXL-B


## drum 30



SH-DR30-G



Ø300



165



C



M



G



B

SH-DR30-C

SH-DR30-M


SH-DR30-G

SH-DR30-B (S)


## drum 40



SH-DR40-M



Ø400



230



C



M



G



B

SH-DR40-C

SH-DR40-M

SH-DR40-G


SH-DR40-B (S)

SH-DIF40 Parchment effect PVC diffuser available as optional extra


## drum 58



SH-DR58-C



Ø580



320



C



M



G



B

SH-DR58-C

SH-DR58-M

SH-DR58-G

SH-DR58-B (S)

SH-DIF58 Parchment effect PVC diffuser available as optional extra





outdoor



Adjustable beam angles





OD-STR-G



OD-MAY-G




OD-STR-G



OD-MAY-G


### strand adjustable

**OD-STR-G** ■  
 2 x 7W CREE LED  
 Max. 550 lumens  
 Power factor 0.95

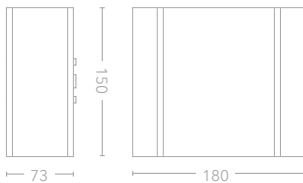

### mayfair adjustable

**OD-MAY-G** ■  
 2 x 3W CREE LED  
 Max. 251 lumens  
 Power factor 0.5

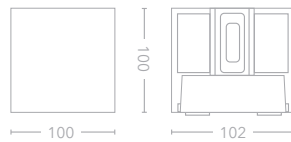

CLASS 1



IP 65

### Key Features

Graphite / Die cast aluminium  
 3000K

Adjustable shutters top and bottom to change the beam angles independently





OD-BER1-G




OD-BER1-G



OD-BER2-G


### berkeley I

OD-BER1-G ■  
8W CREE COB LED  
890 lumens  
IP65

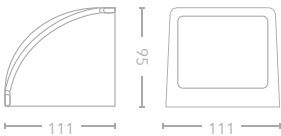

### berkeley II

OD-BER2-G ■  
8W Osram LED  
825 lumens  
IP54

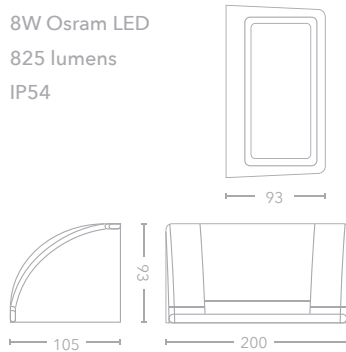

CLASS 1



IP



GLASS

#### Key Features

Graphite / Die cast aluminium

3000K

Power factor 0.9

Fit facing downwards





OD-CLA-G



OD-CLA-G




OD-LAN-G



OD-LAN-G


## claridges

OD-CLA-G ■  
2 x 6W CREE COB  
1030 lumens

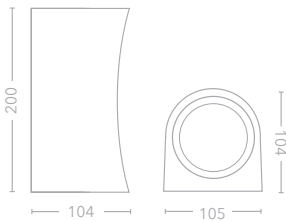

## lanesborough

OD-LAN-G ■  
2 x 6W Osram LED  
1000 Lumens

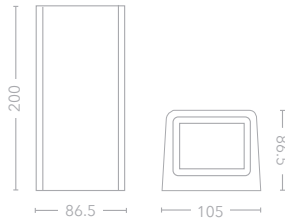

CLASS 1



IP 65



GLASS

### Key Features

Graphite / Die cast aluminium

3000K

Beam Angle 2 x 60°

Power Factor 0.95





OD-WAL1-G



OD-WAL2-G



OD-CON-G



OD-WAL1-G



OD-WAL2-G



OD-CON-G

**waldorf I**

OD-WAL1-G ■  
 3W COB LED  
 180 Lumens  
 0.4 Power factor  
 60° Beam angle

**waldorf II**

OD-WAL2-G ■  
 2x 3w COB LED  
 360 Lumens  
 0.5 Power factor  
 60° Beam angle

**connaught**

OD-CON-G ■  
 2 x 6W CREE COB LED  
 910 Lumens  
 0.95 Power factor  
 90° Beam angle



CLASS 1



IP 65





GLASS

**Key Features**

Graphite finish

Die cast aluminium

3000K

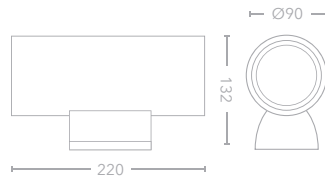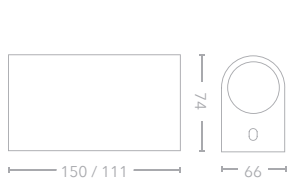




OD-DORB80-G



OD-DORW-G


### dorchester wall light

OD-DORW-G ■  
 8W CREE COB LED  
 580 lumens  
 Wall mounted

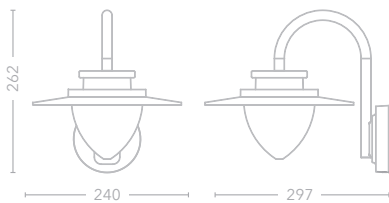

### dorchester 80cm post

OD-DORB80-G ■  
 8W CREE COBLED  
 580 lumens  
 Floor mounted

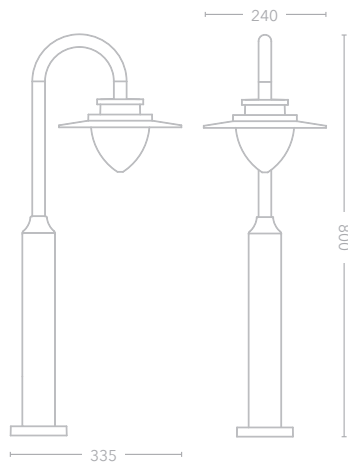

CLASS 1



IP 54

#### Key Features

Graphite /  
 Die cast aluminium /  
 Opal PC diffuser

3000K

Power factor 0.9





OD-SAN80-G



outdoor

OD-SAN80-G

## sanderson bollard

OD-SAN80-G ■  
 8W OSRAM COB LED  
 700 lumens  
 360° Beam angle  
 IP44



CLASS 1



IP  
44

### Key Features

Graphite body /  
 Die cast aluminium / Polycarbonate  
 3000K  
 Power factor 0.9




## grosvenor bollard 80

OD-GRO80-G ■  
8W CREE COB LED  
600 lumens



## grosvenor bollard 30

OD-GRO30-G ■  
8W CREE COB LED  
600 lumens

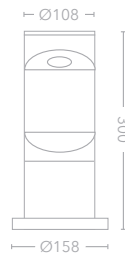

NEW



CLASS 1



IP 54


### Key Features

Graphite body

Die cast aluminium

3000K

Power factor 0.9

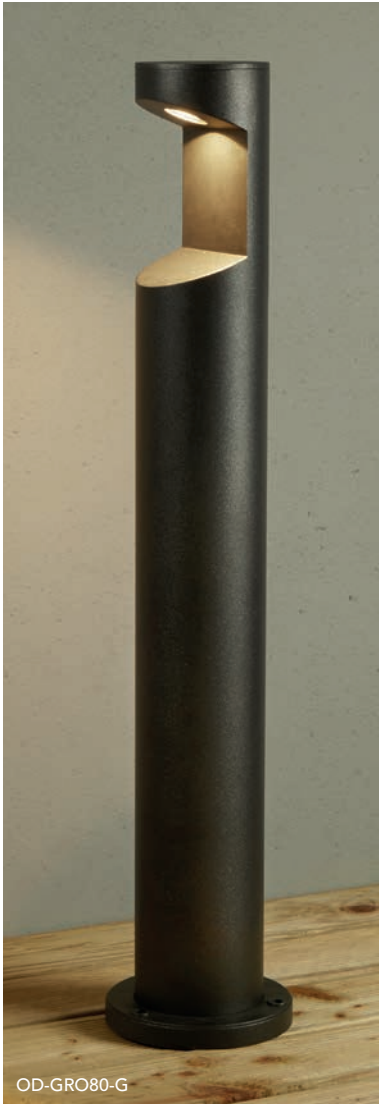


OD-GRO280-G



OD-GRO230-G


**grosvenor II bollard 80**

OD-GRO280-G ■  
12W Lumileds COB LED  
660 lumens

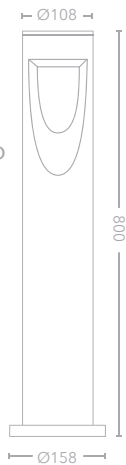

**grosvenor II bollard 30**

OD-GRO230-G ■  
12W Lumileds COB LED  
660 lumens



CLASS 1



IP 54

**Key Features**

Graphite body

Die cast aluminium

3000K

Power factor 0.9





outdoor


OD-FARR / OD-FARR700

## farringdon spike spot

**OD-FARR** ■  
 230V / Class I  
 CREE COB  
 670 Lumens  
 0.55 Power Factor

## farringdon spike spot 700mA

**OD-FARR700** ■  
 700mA / Class III  
 CREE COB  
 670 Lumens  
 Separate driver required  
 Dimmable when used  
 with a dimmable driver

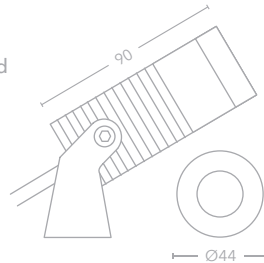

### Key Features

Passivated black / Aluminium  
 8W CREE COB  
 3000K  
 Corrosion resistant  
 240mm Plastic spike included  
 Pre-fitted with 24° lens  
 Spare 10° lens included





Driver:  
Supplied separately  
See page 190



**4 way  
plot light**

IPR-PLOT4SS  
4 x 70° Beam




**3 way  
plot light**

IPR-PLOT3SS  
3 x 70° Beam






**2 way  
plot light**

IPR-PLOT2SS  
2 x 110° Beam



**1 way  
plot light**

IPR-PLOT1SS  
110° Beam

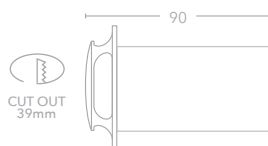

Includes  
installation  
tube



**Key Features**

- Satin stainless steel 316 cover / Aluminium body
- Recessed / 3W CREE XPE / 3000K
- Operating current: 700mA
- Average lumens 90
- Total lumens without cover 275
- Driver supplied separately
- Fittings must be wired in series
- Installation tube must be used for 2000kg drive over rating



IPR-PICRSS




IPR-PICRSS

Driver:  
Supplied separately  
See page 190




## piccadilly round IP67

IPR-PICRSS

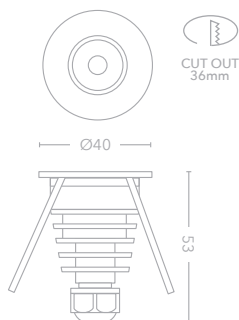

Includes  
installation tube

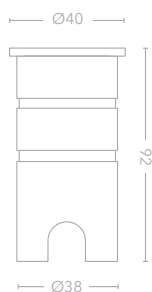

### Key Features

Satin stainless steel 316 cover /  
Aluminium body

3W CREE XPE / 3000K

Operating current: 700mA

175 lumens

Beam angle: 20°

Driver supplied separately  
Fittings must be wired in series





IPR-PADRSS15 / IPR-PADRSS30



IPR-PADSSS15 / IPR-PADSSS30




IPR-PADRSS15




IPR-PADSSS15

Driver:  
Supplied separately  
See page 190

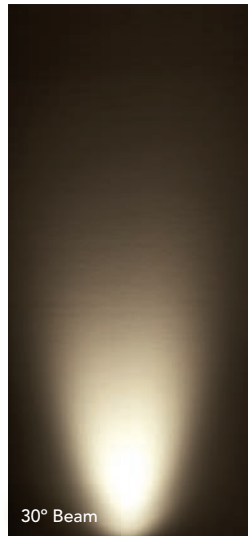

30° Beam

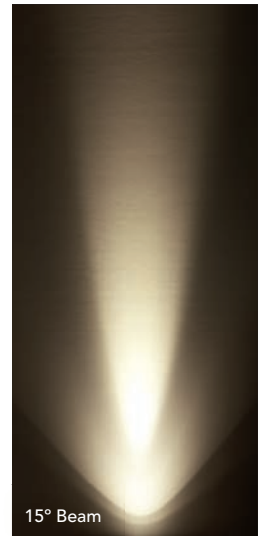

15° Beam

## paddington round IP67

## paddington square IP67





IPR-PADRSS15 ■ IPR-PADRSS30 ■ IPR-PADSSS15 ■ IPR-PADSSS30 ■

15° Beam

30° Beam

15° Beam

30° Beam

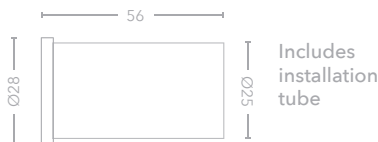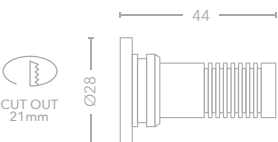

Includes  
installation  
tube



### Key Features

Satin stainless steel 316 cover /  
Aluminium body

1W CREE XPE / 3000K

90 lumens

Beam angle: 15° or 30°

Driver supplied separately  
Fittings must be wired in series

Spring clip supplied for  
installation in cavities





IPR-EUSSS



IPR-EUSSS




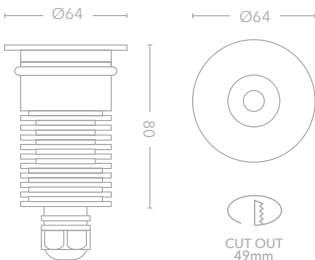
IPR-HOODSS



IPR-HOODSS

## euston 230V


IPR-EUSSS  400 lumens



## hood 230V

IPR-HOODSS  285 lumens

Includes installation tube

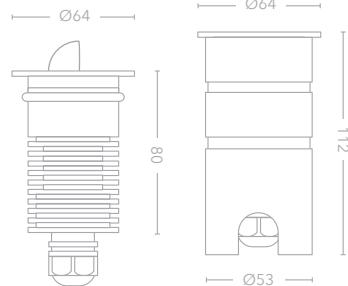

### Key Features

Satin stainless steel 316 cover / Aluminium body

6W COB LED / 3000K

Operating current: 220-240V

Beam angle: 24°

Power factor 0.6

Integral driver

Installation tube included




## sapporo square

OD-SAPS-GW ■ / □

1.1W SMD LED

45 lumens



NEW



CLASS 2



IP  
65

### Key Features

Dark grey and white covers  
supplied in the box

PC / ABS material

3000K

Corrosion resistant

Surface mounted

Vandal resistant materials

Interchangeable covers



NEW

OD-SAPL-GW



NEW

OD-SUZ-GW

### sapporo long

NEW

OD-SAPL-GW ■ / □

3.5W SMD LED

265 lumens




### suzuka slot

NEW

OD-SUZ-GW ■ / □

3W SMD LED

310 lumens

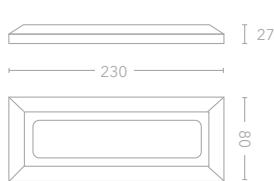

CLASS 2



IP 65

#### Key Features

Dark grey and white covers supplied in the box

PC / ABS material

3000K


Corrosion resistant

Surface mounted

Vandal resistant materials

Interchangeable covers



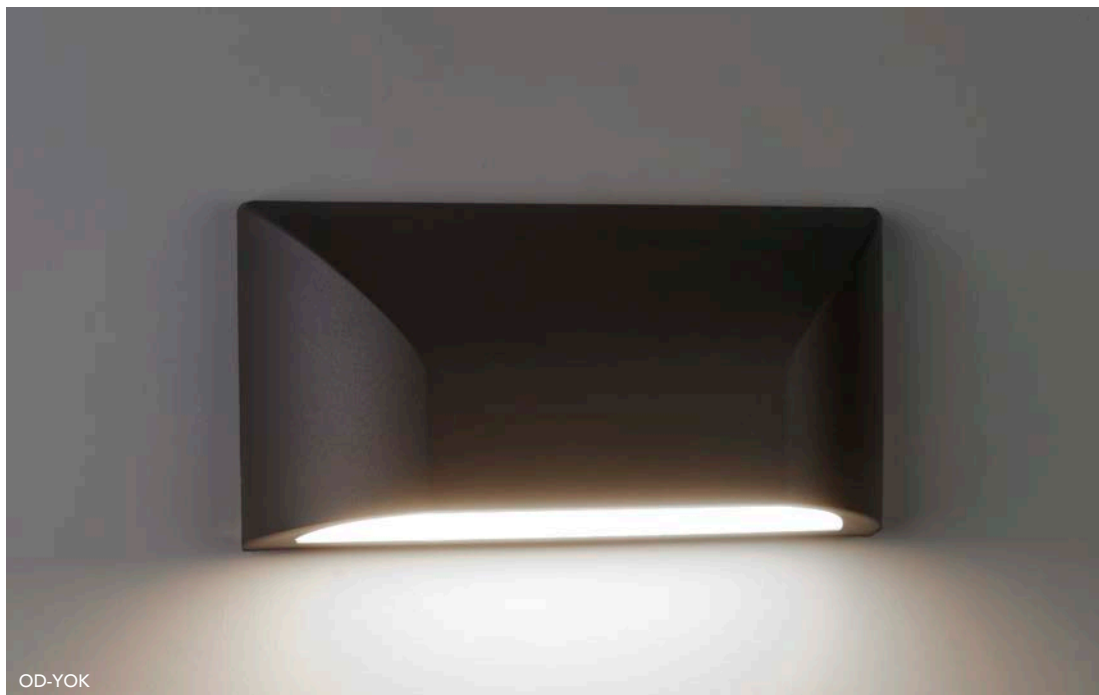

OD-YOK



OD-YOK

OD-YOKS

## yokohama

**OD-YOK** ■  
6W SMD LED  
320 lumens


## yokohama sensor

**OD-YOKS** ■  
6W SMD LED  
160° Sensor  
320 lumens



### Key Features

- Dark Grey PC ABS /
- Opal PC diffuser
- 3000K
- Power factor 0.4
- Corrosion resistant
- Surface mounted
- Vandal resistant materials

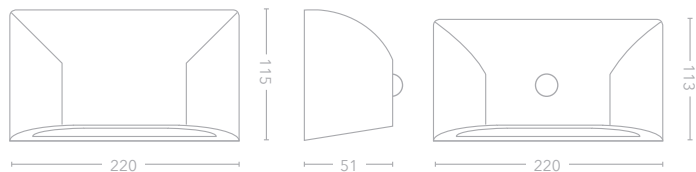



OD-CHIBA




OD-CHIBA



Interchangeable covers

## chiba duo

OD-CHIBA ■  
12.5W SMD LED  
1040 lumens

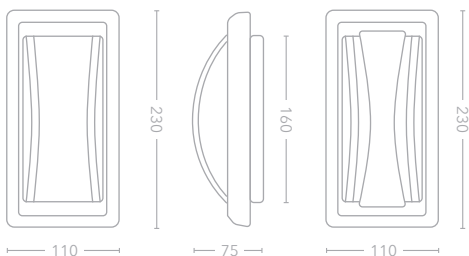

CLASS 2



IP 65

### Key Features

Dark Grey PC ABS /  
Opal PC diffuser

3000K

Power factor 0.6

Wall or ceiling mounted

Vertical or horizontal

Corrosion resistant

Base comes with two covers

Vandal resistant materials






OD-TOKYO



OD-TOKYO

### tokyo

OD-TOKYO ■  
12W SMD LED  
450 lumens

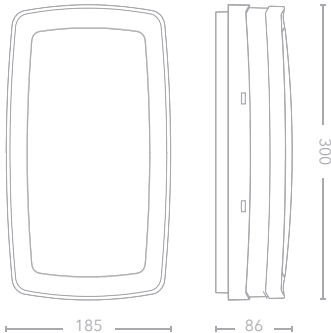

CLASS 2



IP  
54

#### Key Features

Dark Grey PC ABS /  
Opal PC diffuser

3000K

Power factor 0.6

Wall or ceiling mounted  
Vertical or horizontal


Corrosion resistant

Vandal resistant materials




## kobe large

OD-KOBL ■  
21W SMD LED  
1260 lumens

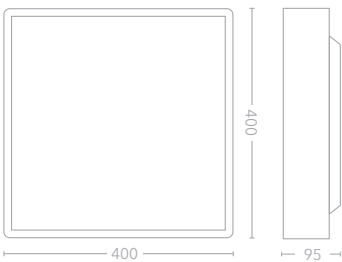

## kobe medium

OD-KOBLM ■  
16W SMD LED  
1030 lumens

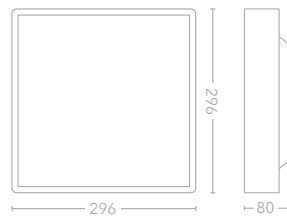

CLASS 2



IP  
54

### Key Features

Dark Grey PC ABS /  
Opal PC diffuser

3000K

Power factor 0.9

Wall / Ceiling mounted

Corrosion resistant

Vandal resistant materials



OD-KYOL




OD-KOBM



OD-KYOS


### kyoto large

OD-KYOL ■  
28W SMD LED  
2090 lumens

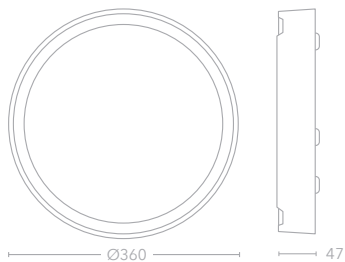


### kyoto medium

OD-KYOM ■  
18W SMD LED  
1320 lumens

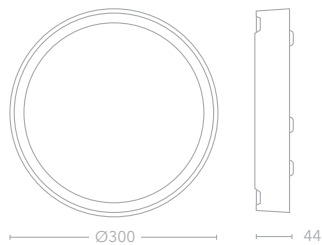

### kyoto small

OD-KYOS ■  
15W SMD LED  
930 lumens

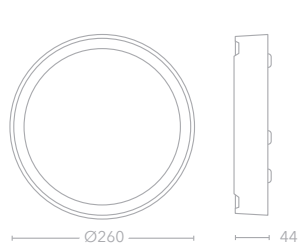



All bathroom lighting installations must comply to the guidelines set out in Amendment 1 of the 17th edition of the IEE Wiring Regulations (BS7671). The bathroom is divided into zones, with prescribed minimum IP ratings for the light fittings in each zone.

IP rating = Ingress Protection rating.

### zone 0

The area inside the bath or shower tray. Fittings must be rated at IPX7 or higher (protected against immersion in water).

### zone 1

The area above the bath or shower up to a height of 2.25 metres. Fittings must be rated at IPX5 or higher (protected from jets of water).

### zone 2

Covers an area 0.6 metres wide immediately next to, and all around Zone 1. The 60cm area around washbasins should also be treated as zone 2. The minimum rating is IPX4. If there is a likelihood of water jets being used for cleaning purposes in Zone 2, a minimum of IPX5 is required.

### outside zone

Covers any area outside Zones 0, 1 and 2. There is no IP requirement in this zone. Bathrooms are allowed to contain a socket outlet, this must be located 3 metres outside Zone 1. Lighting circuits and any socket-outlet circuit in a room containing a bath and/or shower must be provided with 30mA RCD protection.



BA-M-ACQUA

acqua

BA-M-ACQUA  
18.7W SMD LED  
1326 lumens



-   
CLASS 2
-   
SWITCH
-   
IP 44
-   
DE-MISTER

Key Features

Frosted / Mirrored glass

Bathroom zone 2

3000K

Removable pull cord

Demister pad

# bathroom index

## downlights



## marker lights and mini spots



# ceiling



CORONA

Pages 92-93



NEW

BANDA / ANDAMAN

Pages 88-89



NEW

SELENE

Pages 54-55

# wall




VERITAS / VENTI

Pages 110-111



SIMPLON

Page 35



VOSGES / PYRENEES

Pages 36-37

## accessories



MOD1WIP

### 1w IP65 350mA LED module

1W CREE XPE 350mA  
Beam angle: 30°  
95 lumens

MOD1WIP 3000K ●  
MOD1WIP-2700 2700K ●



MOD1WIP230V

### 1w IP65 230V LED module

1W CREE XPE 350mA  
Beam angle: 30°  
95 lumens

MOD1WIP230 3000K ●  
MOD1WIP230V-2700 2700K ●



MOD1W

### 1w 350mA LED module


1W CREE XPE 350mA  
Beam angle: 30°  
95 lumens

MOD1W 3000K ●  
MOD1W-2700 2700K ●

## constant current drivers

| Item no.   | Current | Min. load | Max. load | TRIAC dimmable | IP Rating | Power factor | Dimensions L x W x H (mm) | Tails / Screw terminals |
|------------|---------|-----------|-----------|----------------|-----------|--------------|---------------------------|-------------------------|
| DR350-3TD  | 350mA   | 2W        | 3W        | Yes            | IP65      | 0.9          | 38 x 27 x 21              | Tails                   |
| DR350-7    | 350mA   | 1W        | 7W        | No             | IP65      | 0.4          | 60 x 35 x 23              | Tails                   |
| DR350-9TD  | 350mA   | 2W        | 9W        | Yes            | IP20      | 0.9          | 110 x 45 x 28             | Screw terminals         |
| DR350-18TD | 350mA   | 10W       | 18W       | Yes            | IP20      | 0.9          | 165 x 52 x 25             | Screw terminals         |
| DR700-3    | 700mA   | 1W        | 3W        | No             | IP65      | 0.4          | 38 x 27 x 21              | Tails                   |
| DR700-9    | 700mA   | 3W        | 9W        | No             | IP65      | 0.5          | 60 x 35 x 23              | Tails                   |
| DR700-18TD | 700mA   | 6W        | 18W       | Yes            | IP20      | 0.9          | 110 x 45 x 28             | Screw terminals         |
| DR700-36TD | 700mA   | 20W       | 36W       | Yes            | IP20      | 0.9          | 165 x 52 x 25             | Screw terminals         |

## Wiring diagram



\* NOTE: All these drivers must be wired in series



## product name index

|                               |       |                     |        |                    |         |                   |         |
|-------------------------------|-------|---------------------|--------|--------------------|---------|-------------------|---------|
| Acqua                         | 187   | Drum 40             | 155    | Lino               | 81      | Simplon           | 30      |
| Andaman                       | 89    | Drum 58             | 155    | London Bridge      | 107     | Simplon IP65      | 35      |
| Andromeda Ceiling             | 85    | Drum Diffusers      | 155    | Lyra               | 90      | Slim Trim         | 14-15   |
| Andromeda Track               | 44    | Eternity            | 76-77  | Mabillon           | 120     | Adjustable        |         |
| Ankle Light                   | 39    | Europe              | 117    | Mayfair Adjustable | 159     | Slim Trim IP65    | 16-17   |
| Apollo Pendant                | 83    | Euston              | 177    | Medium Oval        | 154     | Slim Trimless     | 24      |
| Apollo Spotlights             | 56-57 | Farringdon          | 171    | Mini Projector     | 127     | Slim Trimless FR  | 25      |
| Apollo Track                  | 42    | Fenchurch           | 134    | Mirabeau           | 119     | Sloane            | 100-101 |
| Ara                           | 72-73 | Gemini              | 46     | Monceau            | 119     | Small Oval        | 152     |
| Artemis                       | 83    | Glacier             | 18     | Moon               | 51-53   | Small Rectangle   | 153     |
| Athena                        | 82    | Grid                | 20-23  | Odeon              | 125     | Southwark         | 103     |
| Avron                         | 121   | Grosvenor           | 168    | Olympia            | 146-147 | Strand Adjustable | 159     |
| Banda                         | 88    | Grosvenor II        | 169    | Open Crescent      | 152     | Suzuka            | 179     |
| Berkeley                      | 161   | Halkin              | 105    | Open Square        | 153     | Telegraphe        | 27      |
| Blanche LED                   | 32    | Hepburn             | 78-79  | Opera              | 125     | Tokyo             | 183     |
| Blanche GU10                  | 34    | Hera                | 13     | Orbit              | 75      | Track Heads       | 42-46   |
| Blob                          | 94-95 | Holborn             | 38     | Orcus              | 86      | Track             | 48      |
| Boulogne LED                  | 32    | Holborn Anti Glare  | 39     | Orion              | 45      | Track Kits        | 48      |
| Cadet                         | 123   | Honos               | 84-85  | Ovo                | 113     | Pendant Adapter   | 47      |
| Cambronne                     | 124   | Hood                | 177    | Paddington         | 175     | Track Accessories | 49      |
| Chelsea                       | 139   | Hoxton              | 38     | Pegasus            | 43      | Trocadero         | 27      |
| Chiba                         | 182   | Ice                 | 104    | Piccadilly         | 174     | Tube              | 113     |
| Claridges                     | 163   | Jupiter             | 59     | Pimlico            | 130-131 | Universal Shades  | 128-129 |
| Clip                          | 80    | Kensington          | 145    | Pimlico Plus       | 132-133 | Vavin             | 109     |
| Compass                       | 74    | Kobe                | 184    | Plot               | 173     | Venti             | 111     |
| Concorde                      | 116   | Kyoto               | 185    | Pyrenees           | 30      | Veritas           | 110     |
| Cone                          | 152   | Lanesborough        | 163    | Pyrenees IP65      | 37      | Victoria          | 135     |
| Connaught                     | 165   | Large Oval          | 154    | Renne              | 28-29   | Victoria LED      | 136-137 |
| Corona                        | 93    | Large Rectangle     | 153    | Rome               | 26      | Voltaire          | 123     |
| Diana                         | 39    | LED Module          | 190    | Sanderson          | 167     | Vosges IP65       | 36      |
| Dorchester                    | 166   | LED Strip           | 62, 64 | Sapporo            | 178-179 | Vulcan            | 91      |
| Drivers /<br>Constant Current | 190   | LED Strip Drivers   | 68-69  | Saturn             | 87      | Waldorf           | 165     |
| Drivers /<br>Constant Voltage | 68-69 | LED Strip Profile   | 66-67  | Selene             | 54-55   | Wall Washer       | 19      |
| Drum 15                       | 152   | LED Strip           | 63, 65 | Sentier            | 119     | X-Large Rectangle | 154     |
| Drum 30                       | 155   | Connectors          |        | Shades             | 152-155 | Yokohama          | 181     |
|                               |       | Libra Table & Floor | 143    | Shade Suspension   | 96-97   | Zeus              | 11-12   |
|                               |       | Libra Track         | 45     | Shoreditch         | 103     |                   |         |

## product code index

|               |     |             |     |            |     |            |     |
|---------------|-----|-------------|-----|------------|-----|------------|-----|
| AM-CORO       | 93  | FL-BLOB     | 95  | OD-CLA     | 163 | PL-EURO    | 117 |
| AM-VUL        | 91  | FL-ETE55    | 77  | OD-CON     | 165 | PL-GRID1FR | 23  |
| BA-M-ACQUA    | 187 | FL-LYRA     | 90  | OD-DOR     | 166 | PL-MABIL   | 120 |
| BA-VEN        | 111 | FL-SAT      | 87  | OD-FARR    | 171 | PL-MIRAB   | 119 |
| BA-VER        | 110 | FS-KEN      | 145 | OD-GRO     | 168 | PL-MONCE   | 119 |
| CE-AND        | 85  | FS-LIB      | 143 | OD-GRO2    | 169 | PL-ODEON   | 125 |
| CE-HEPL       | 79  | FS-OLY      | 147 | OD-KOB     | 184 | PL-OPERA   | 125 |
| CE-HEPR       | 78  | IPR-ANK     | 39  | OD-KYO     | 185 | PL-PYREN   | 30  |
| CE-HEPS       | 78  | IPR-EUSSS   | 177 | OD-LAN     | 163 | PL-REN1    | 28  |
| CE-HONR       | 85  | IPR-HOL     | 38  | OD-MAY     | 159 | PL-REN2    | 29  |
| CE-HONSQ      | 85  | IPR-HOLSSAG | 39  | OD-SAN     | 167 | PL-RENWW   | 29  |
| CE-HONSQ2     | 84  | IPR-HOODSS  | 177 | OD-SAPL    | 179 | PL-ROM     | 26  |
| CE-LINO       | 81  | IPR-HOX     | 38  | OD-SAPS    | 178 | PL-SENTI   | 119 |
| CE-ORC        | 86  | IPR-PAD     | 175 | OD-STR     | 159 | PL-SIMPL   | 30  |
| DL-DIA        | 39  | IPR-PIC     | 174 | OD-SUZ     | 179 | PL-SLIMFRW | 25  |
| DL-GLAR       | 18  | IPR-PLOT    | 173 | OD-TOKYO   | 183 | PL-SLIMIPW | 24  |
| DL-GRID1      | 20  | IPR-WR      | 37  | OD-WAL     | 165 | PL-SLIMW   | 24  |
| DL-GRID1FR    | 22  | IPR-WSL     | 35  | OD-YOK     | 181 | PL-TELEG   | 27  |
| DL-GRID2      | 21  | IPR-WVO     | 36  | PE-APO     | 83  | PL-TROCA   | 27  |
| DL-GRID2FR    | 22  | LED-PROJ1W  | 127 | PE-ARA100  | 72  | PL-VOLT    | 123 |
| DL-GRID3      | 21  | LST-14      | 64  | PE-ARA60   | 73  | SH-CO      | 152 |
| DL-MOD        | 13  | LST-4       | 62  | PE-ART     | 83  | SH-CR      | 152 |
| DL-SLIM       | 15  | LST-CON1    | 65  | PE-ATH     | 82  | SH-DIF     | 155 |
| DL-SLIMFRW    | 14  | LST-CON2    | 65  | PE-BLOB    | 94  | SH-DR15    | 152 |
| DL-SLIMIP     | 17  | LST-CON3    | 63  | PE-CLIP    | 80  | SH-DR30    | 155 |
| DL-SLIMIPFR   | 16  | LST-CON4    | 63  | PE-COM2    | 74  | SH-DR40    | 155 |
| DL-SLIMSQ     | 15  | LST-DR      | 69  | PE-ETE55   | 77  | SH-DR58    | 155 |
| DL-UNI        | 12  | LST-DRD     | 68  | PE-ETE78   | 76  | SH-OV      | 152 |
| DL-WASH       | 19  | LST-PRO-COR | 67  | PE-LYRA    | 90  | SH-OVL     | 154 |
| DL-WWW        | 19  | LST-PRO-HS  | 66  | PE-ORB120  | 75  | SH-OVM     | 154 |
| DL-ZEUS3K     | 11  | LST-PRO-PL1 | 66  | PL-AVRON   | 121 | SH-P1      | 97  |
| DL-ZEUSGU10   | 12  | LST-PRO-R1  | 66  | PL-BLA     | 32  | SH-P3      | 96  |
| DL-ZEUSSUNSET | 11  | LST-PRO-SM1 | 67  | PL-BLAGU10 | 34  | SH-RL      | 153 |
| DR350         | 190 | MOD1W       | 190 | PL-BOU     | 32  | SH-RS      | 153 |
| DR700         | 190 | MOD1WIP     | 190 | PL-CADET   | 123 | SH-RXL     | 154 |
| FL-ADM        | 89  | OD-BER      | 161 | PL-CAMBR   | 124 | SH-SF3     | 96  |
| FL-BAN        | 88  | OD-CHIBA    | 182 | PL-CONC    | 116 | SH-SQO     | 153 |

|             |     |         |     |
|-------------|-----|---------|-----|
| SH-UC       | 129 | TR-GEM  | 46  |
| SH-UD       | 128 | TR-LC   | 49  |
| SH-UR       | 129 | TR-LE   | 49  |
| SH-US       | 128 | TR-LIB  | 45  |
| SH-UWB      | 128 | TR-MJ   | 49  |
| SH-VICLED   | 136 | TR-ORI  | 45  |
| SH-VICLEDR  | 137 | TR-PEG  | 43  |
| SH-WBFEN-SN | 134 | TR-PEN  | 47  |
| SH-WBPIM    | 130 | TR-SUS  | 49  |
| SH-WBPIMP   | 132 | TR-T1   | 48  |
| SH-WBPIMPR  | 133 | TR-T2   | 48  |
| SH-WBPIMR   | 131 | TR-TC   | 49  |
| SH-WBVIC    | 135 | TR-XC   | 49  |
| SH-WBVICR   | 135 | WL-CHE  | 139 |
| SP-APO1     | 57  | WL-CHER | 139 |
| SP-APO2     | 56  | WL-HALK | 105 |
| SP-APO3     | 56  | WL-ICE  | 104 |
| SP-APOR     | 57  | WL-LB   | 107 |
| SP-JUP      | 59  | WL-OV25 | 113 |
| SP-MOO1     | 51  | WL-SHO  | 103 |
| SP-MOO2     | 53  | WL-SLO  | 100 |
| SP-MOO3     | 52  | WL-SOU  | 103 |
| SP-MOO3L    | 52  | WL-TU16 | 113 |
| SP-MOO4     | 53  | WL-VAV  | 109 |
| SP-MOOR     | 51  |         |     |
| SP-SEL3L    | 55  |         |     |
| SP-SEL3R    | 54  |         |     |
| TA-KEN      | 145 |         |     |
| TA-LIB      | 143 |         |     |
| TA-OLY      | 147 |         |     |
| TA-OLY-USB  | 146 |         |     |
| TR-1        | 48  |         |     |
| TR-2        | 48  |         |     |
| TR-AND      | 44  |         |     |
| TR-APO      | 42  |         |     |
| TR-CC       | 49  |         |     |
| TR-EC       | 49  |         |     |

**Additional information**

Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company shall be subject to correction without any liability on the part of the Company. Goods supplied may vary in detail from the illustrations, drawings, measurements and descriptions set out in the Company's sales literature, which are approximate and for guidance only and will not form part of the Contract. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed. All terminology used in the Company's sales literature is, subject to these Conditions, that as understood by general usage in the trade. For full terms and conditions of sale consult your distributor.

# guide to symbols



COMPATIBLE WITH HERA MODULE pg 15



CLASS 1

Class I fittings must have their chassis connected to an electrical earth (ground).



CLASS 2

Class II or double insulated electrical fittings does not require a safety connection to electrical earth (ground).



CLASS 3

Class III fittings are designed to be supplied from a separated / safety extra-low voltage (SELV) power source.



IP 44

(4) Objects greater than 1 mm, e.g. tools, wires / small wires  
(4) Protected against water sprayed from all directions - limited ingress permitted.



IP 54

(5) Protected against dust - limited ingress (no harmful deposits)  
(4) Protected against water sprayed from all directions - limited ingress permitted.



IP 65

(6) Totally protected against dust (Dust-tight)  
(5) Protected against low pressure jets of water from all directions - limited ingress permitted.



IP 67

(6) Totally protected against dust (Dust-tight)  
(7) Protection against the effects of immersion between 15cm - 1 metre



SWITCH

The product has an electrical ON/OFF switch incorporating a spring-loaded rocker.



DIMMABLE

The fitting can be used with a compatible dimming light switch.



GLASS

The fitting contains fragile glass parts.



CUT OUT 75mm

The electrical parts of the fitting require a ceiling cut out.



DRIVE OVER

The outdoor, inset floor mounted fitting can be driven over by a vehicle, up to 2000kg weight limit.



FIRE RATED

Fire rated downlights restore the fire integrity of a ceiling with recessed ceiling lights installed.



320kg WALKOVER

The outdoor, inset floor mounted fitting can be walked over by a flat foot, up to 320kg weight limit.



350mA

A unit of electric current (mA) equal to one thousandth of an Amp.





24 VOLTS

The SI unit of electromotive force, the Volt (V) is a standard for extra low voltage power systems.

## shade colours



C

Coconut colour cotton material lamp shade.





M

Mushroom colour cotton material lamp shade.





G

Grey seal colour cotton material lamp shade.



B

Black colour cotton material lamp shade.




## fitting finishes



AB

Antique brass finish for fixtures & fittings.




Antique brass



SN

Satin nickel finish for fixtures & fittings.




Satin nickel



CP

Polished chrome finish for fixtures & fittings.



Polished chrome



SS

Stainless steel finish for fixtures & fittings.




Stainless steel



B

Black finish for fixtures & fittings.




Black



W

White finish for fixtures & fittings.



White



GR

Graphite grey finish for fixtures & fittings.



Graphite grey



SG

Silver grey finish for fixtures & fittings.



Silver grey

# gids voor symbolen



COMPATIBEL MET HERA-MODULE pg 15



KLASSE 1

Klasse 1 armaturen moeten in bezit zijn van een aardeverbinding.



KLASSE 2

Klasse 2 armaturen hoeven geen aardeverbinding te bezitten.



KLASSE 3

Klasse 3 armaturen zijn ontworpen voor een externe laagspanningsvoeding.



IP 44

IP44 (4) Objecten groter dan 1mm zoals bv kabels / armaturen zijn (4) beschermd tegen water nevel vanuit elke hoek. Beperkt indringen toegestaan.



IP 54

IP55 (5) Beschermd tegen stof - beperkt indringen toegestaan en niet schadelijk. (5) Beschermd tegen water nevel vanuit elke hoek. Beperkt indringen toegestaan.



IP 65

IP65 (6) Compleet beschermd tegen stof (5) Beschermd tegen lichte waterstralen, vanuit elke hoek. Beperkt indringen toegestaan.



IP 67

IP67 (6) Compleet beschermd tegen stof (7) Beschermd tegen het effect van onderdompeling 15cm tot 1m.



SCHAKELAAR

Dit product heeft een elektrische aan/uit schakelaar, in combinatie met een veerbelaste tuimelaar.



DIMBAAR

Dit armatuur is geschikt om te dimmen, in combinatie met dimbare lichtbron.



GLAS

Dit armatuur bevat kwetsbare glazen onderdelen.



OPENING 75mm

Voor dit armatuur is een opening in het plafond vereist.



OVERRIJDBAAR

Geschikt voor plaatsing in de vloer, met een drukbelasting tot 2000 kilo.



BRANDWEREND

Dit armatuur beschikt over een brandwerende functie.



320kg OVERLOOPBAAR

Geschikt voor plaatsing in de vloer, met een drukbelasting tot 320 kilo.



350mA

Een eenheid van elektrische stroom gelijk aan een duizendste van een Amp.




24 VOLTS

De SI-eenheid van elektromotorische kracht, is volt. Dit is standaard voor extra laagspanning-systemen.

## lampenkappen kleuren



C

Coconut  
kleur katoen materiaal  
lampenkap.





M

Mushroom  
kleur katoen materiaal  
lampenkap.





G

Grey seal  
kleur katoen materiaal  
lampenkap.



B

Black  
kleur katoen materiaal  
lampenkap.



## armatuur kleuren



AB

Antiek messing afwerking voor armaturen en fittingen.



SN

Satijn messing afwerking voor armaturen en fittingen.



CP

Gepolijst messing afwerking voor armaturen en fittingen.



SS

RVS messing afwerking voor armaturen en fittingen.



B

Zwart messing afwerking voor armaturen en fittingen.



W

Wit messing afwerking voor armaturen en fittingen.




GR

Grafiët messing afwerking voor armaturen en fittingen.




SG


Zilver grijs messing afwerking voor armaturen en fittingen.



Antiek




Satijn




Gepolijst




RVS




Zwart



Wit



Grafiët



Zilver grijs

# guide des symboles



COMPATIBLE AVEC HERA MODULE pg 15



CLASSE 1

Dispositifs de Classe I : Le châssis doit être connecté à une prise de terre.



CLASSE 2

Classe II ou double isolation du câblage électrique connexion de sécurité à une prise de terre électrique non obligatoire.



CLASSE 3

Les dispositifs de classe III sont conçus pour être alimentés par une source d'alimentation séparée en basse tension (SELV).



IP 44

(4) Protégé contre objets de plus de 1 mm, exemple : outils, fils électriques  
(4) Protégé contre l'eau pulvérisée dans toutes les directions - pénétration limitée.



IP 54

(5) Protégé contre la poussière - pénétration limitée (pas de dépôts)  
(4) Protégé contre l'eau pulvérisée dans toutes les directions - pénétration limitée.



IP 65

(6) Totalement protégé contre la poussière (étanche à la poussière)  
(5) Protégé contre les jets basse pression dans toutes les directions - pénétration limitée.



IP 67

(6) Totalement protégé contre la poussière (étanche à la poussière)  
(7) Protection contre les effets de l'immersion entre 15cm - 1 mètre.



INTER

Le produit possède un interrupteur électrique interrupteur ON/OFF incorporant une bascule à ressort.



DIMMABLE

Le dispositif peut être utilisé avec un appareil variateur de lumière compatible.



VERRES

Le dispositif contient des pièces fragiles.



DÉCOUPE 75mm

L'installation électrique de l'appareil nécessitent une découpe.



DRIVE OVER

L'encasté de sol peut être écrasé par un véhicule, jusqu'à une limite de poids de 2000 kg.



FIRE RATED

Ignifuge - Protection au feu - prévient le risque d'incendie dans un plafond.



320kg WALKOVER

L'armature de l'encastée de sol résiste jusqu'à un poids de 320 kg.



350mA

Unité de courant électrique (mA) égale à un millième d'ampère.





24 VOLTS

L'unité SI de la force électromoteur, le Volt (V) est un standard pour les puissances basse tension.

## couleurs abajour



C

Coconut  
Abat-jour en coton de couleur.





M

Mushroom  
Abat-jour en coton de couleur.





G

Grey seal  
Abat-jour en coton de couleur.



B

Black  
Abat-jour en coton de couleur.



## finitions des luminaires



AB

Finition en Laiton antique pour les luminaires et les composants.



SN

Finition en Nickel Satiné pour les luminaires et les composants.



CP

Finition en Chrome Poli pour les luminaires et les composants.



SS

Finition en Acier Inoxidable pour les luminaires et les composants.



B

Finition en Noir pour les luminaires et les composants.



W

Finition en Blanc pour les luminaires et les composants.




GR

Finition en Gris graphite pour les luminaires et les composants.



SG


Finition en Gris argenté pour les luminaires et les composants.



Laiton antique




Nickel satiné



Chrome poli




Acier inoxydable



Noir



Blanc



Gris graphite



Gris argenté





© 2021 All Rights Reserved Searchlight Electric Ltd

**project**  
collection

**21/22**

[www.projectcollection.co.uk](http://www.projectcollection.co.uk)

---

**Project Collection**

---

Sidney House

---

900 Oldham Road

---

Manchester

---

M40 2BS

---

United Kingdom

---

**Benelux Showroom / Office**

---

Hoogjens 1

---

4254 XV Sleeuwijk

---

Netherlands

---

+31 85-3036527

---

T +44 (0) 161 203 3456

---

E [info@projectcollection.co.uk](mailto:info@projectcollection.co.uk)

---



5 053423 189666

---